



# REL-SG 24/F104

Order No.: 2960135

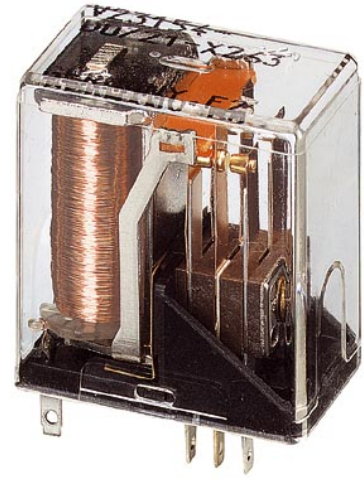

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2960135>

KAMMRELAIS®, contact F 104, size 2, heavy-duty contact, 2 PDTs, input voltage 24 V DC

Commercial data	
GTIN (EAN)	 4 017918 086541
Note	Made-to-order
sales group	G081
Pack	10 pcs.
Customs tariff	85364190
Catalog page information	Page 103 (IF-2002)

#### Product notes

WEEE/RoHS-compliant since:  
07/25/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Coil side	
Nominal input voltage $U_N$	24 V DC
Input voltage range in reference to $U_N$	0.8 ... 1.1

Typical response time	8 ms
Typical release time	3 ms
Coil resistance	890 $\pm$ 89

#### Contact side

Contact type	Single contact
Contact material	Silver (Ag), gold-flashed
Maximum switching voltage	250 V AC/DC
Maximum inrush current	5 A
Limiting continuous current	5 A
Interrupting rating (ohmic load) max.	120 W (at 24 V DC)
	60 W (for 48 V DC)
	50 W (for 60 V DC)
	70 W (for 110 V DC)
	70 W (for 250 V DC)
	500 VA (for 250 V AC)

#### General data

Test voltage relay winding/relay contact	1 kV AC (50 Hz, 1 min.)
Test voltage PDT/PDT	1 kV AC (50 Hz, 1 min.)
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Mechanical service life	Approx. $10^7$ cycles

#### Certificates / Approvals




Certification

GOST

**Diagrams/Drawings**

Circuit diagram

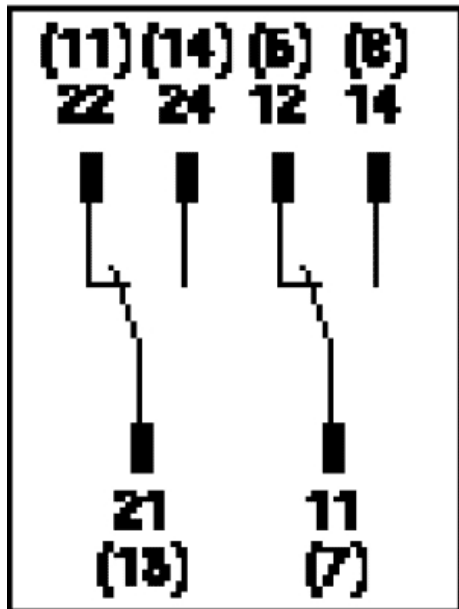

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;