



Bestückungsplan / contact layout

■ bestückt / assemble

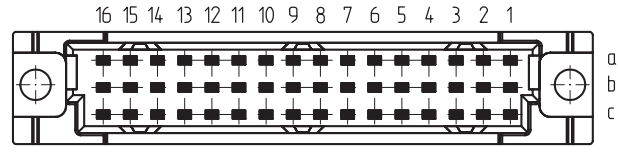

Leiterplatten-Lochbild / PCB drillhole pattern

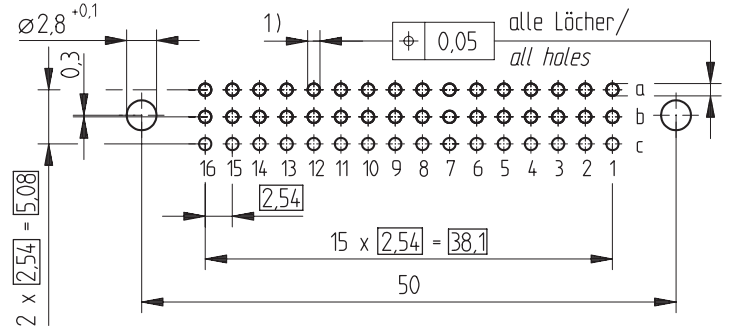

Elastische Einpresszone mit Übergabesteckzone / compliant pressfit zone with mating transfer zone

Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062/Nr.6

diameter of drilled hole see drawing 164062/No.6

- 1) $\phi 1,0 \pm 0,06$ Durchmesser des metallisierten Loches
- $\phi 1,0 \pm 0,06$ Diameter of finished plated-through hole
- $\phi 1,15 \pm 0,025$ Bohrungsdurchmesser des Loches
- $\phi 1,15 \pm 0,025$ Diameter of drilled hole

Consider protection memo from DIN 34

Information:	Tolerances	 All Dimensions in mm	Scale	2:1
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Designation Federleiste C/2, 48 EE Fem. Con. C/2, 48 Pressfit	
Subject to modification without prior notice. Drawing will not be updated.		 www.ERNI.com	284136	
Index	Date	H:00062237.SZA	STVC/2	