

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes





more than you expect



**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	1.5 mOhms max.
D.C. RESISTANCE	3-5 @20°C	1.5 mOhms max.
D.C. RESISTANCE	8-10 @20°C	3 mOhms max.
INDUCTANCE	2-5 tie(3+4), 100kHz, 100mVAC, Ls	70.0uH min.
LEAKAGE INDUCTANCE	2-5 tie(3+4, 8+10), 100kHz, 100mVAC, Ls	150nH max.
DIELECTRIC	2-8 tie(3+4), 500VDC, 1 second	-
TURNS RATIO	(8-10):(2-4)	1.5:1, ±1%
TURNS RATIO	(8-10):(3-5)	1.5:1, ±1%

TERM. NO.'s FOR REF. ONLY

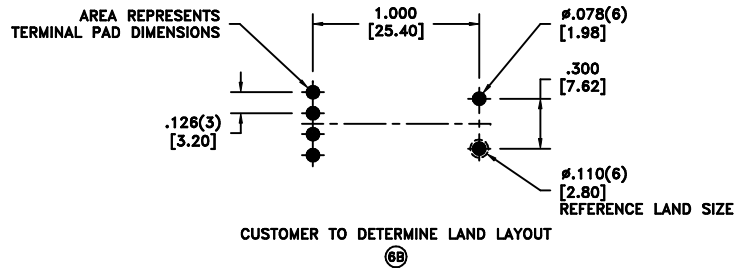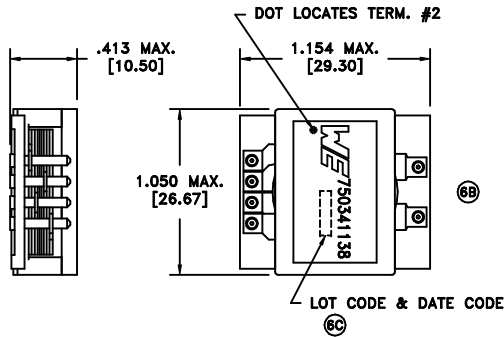

**GENERAL SPECIFICATIONS:**

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

REV.	DATE	Packaging Specifications Method: <b>Tape &amp; Reel</b> PKG-0793 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1°      Decimals: ±.005 [.13] Fractions: ±1/64      Footprint: ±.005 [.13]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>750341138</b>
6C	11/12			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750341138	SPECIFICATION SHEET 1 OF 1
6B	4/12					
6A	10/11	SEE REVISION SHEET FOR REVISION LEVEL				

