

## Surface Mount Fast Switching Diodes


## BAV99BRW

### FEATURES

- Fast switching speed.
- For general purpose switching application.
- Ultra-small surface mount package.
- High conductance.
- Two “BAV99” Circuits in one package.



Lead-free

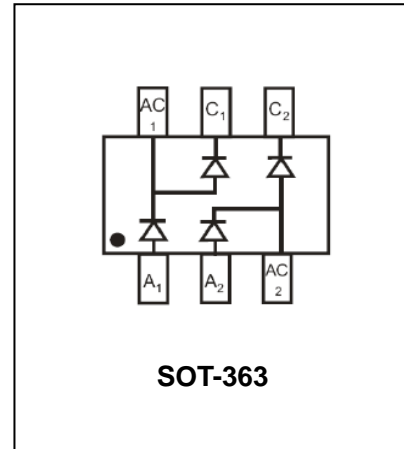

### APPLICATIONS

- For general purpose switching application.

### ORDERING INFORMATION

Type No.	Marking	Package Code
BAV99BRW	KGJ	SOT-363

### MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Characteristic	Value	Unit
$V_{RM}$	Non-Repetitive Peak Reverse Voltage	100	V
$V_{RRM}$	Peak repetitive reverse voltage	75	V
$V_{RWM}$	Working peak reverse voltage		
$V_R$	DC reverse voltage		
$V_{R(RMS)}$	RMS Reverse voltage	53	V
$I_O$	Average rectified output current	150	mA
$I_{FSM}$	Non-Repetitive Peak Forward Surge Current	@t=1.0us 2.0 @t=1.0s 1.0	A
$P_D$	Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	625	°C/W
$T_j, T_{stg}$	Operating and Storage Temperature Range	-65 to +150	°C

### ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified



Surface Mount Fast Switching Diodes

BAV99BRW

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Reverse breakdown voltage	$V_{(BR)R}$	$I_R=2.5\mu A$	75		V
Forward voltage	$V_F$	$I_F=1.0mA$ $I_F=10mA$ $I_F=50mA$ $I_F=150mA$		0.715 0.855 1.0 1.25	V
Reverse current	$I_R$	$V_R=75V$ $V_R=75V, T_j=150^\circ C$ $V_R=25V, T_j=150^\circ C$ $V_R=20V$		2.5 50 30 25	$\mu A$ $\mu A$ $\mu A$ nA
Total Capacitance	$C_J$	$V_R=0V, f=1.0MHz$		2.0	pF
Reverse Recovery time	$t_{rr}$	$I_F=I_R=10mA, I_{rr}=0.1*I_R,$ $R_L=100\Omega$		4.0	ns

TYPICAL CHARACTERISTICS @  $T_a=25^\circ C$  unless otherwise specified

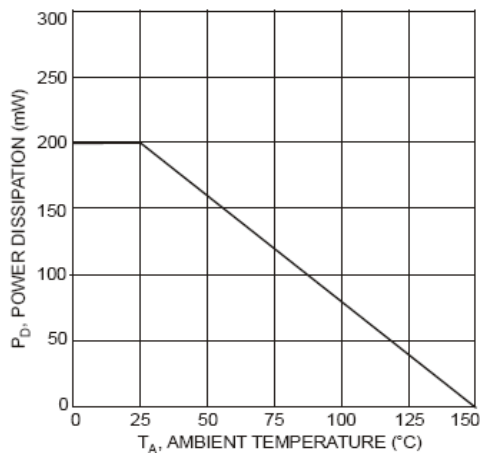


Fig. 1 Power Derating Curve, Total Package

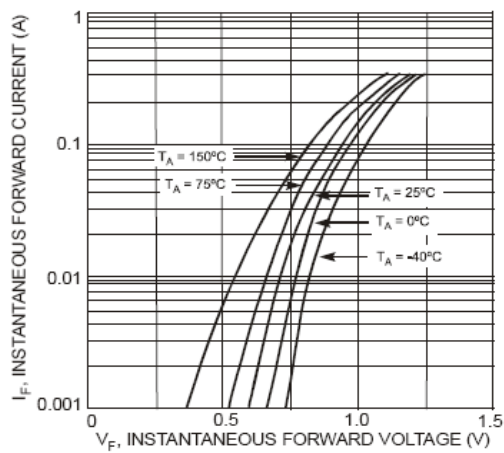


Fig. 2 Typical Forward Characteristics, Per Element

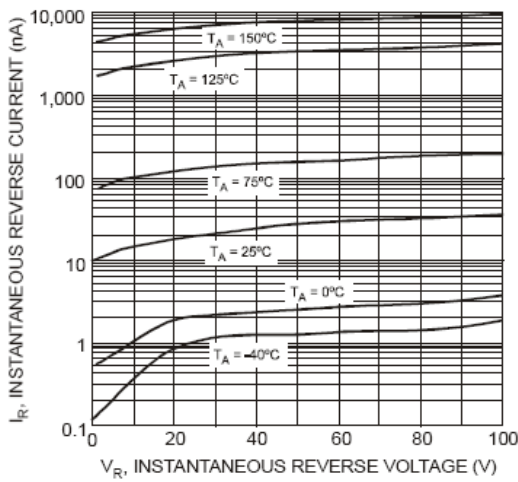


Fig. 3 Typical Reverse Characteristics, Per Element

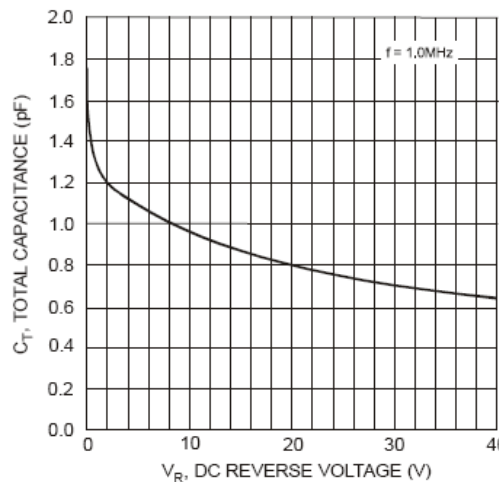


Fig. 4 Total Capacitance vs. Reverse Voltage, Per Element


PACKAGE OUTLINE

**Surface Mount Fast Switching Diodes**

**BAV99BRW**

Plastic surface mounted package


SOT-363

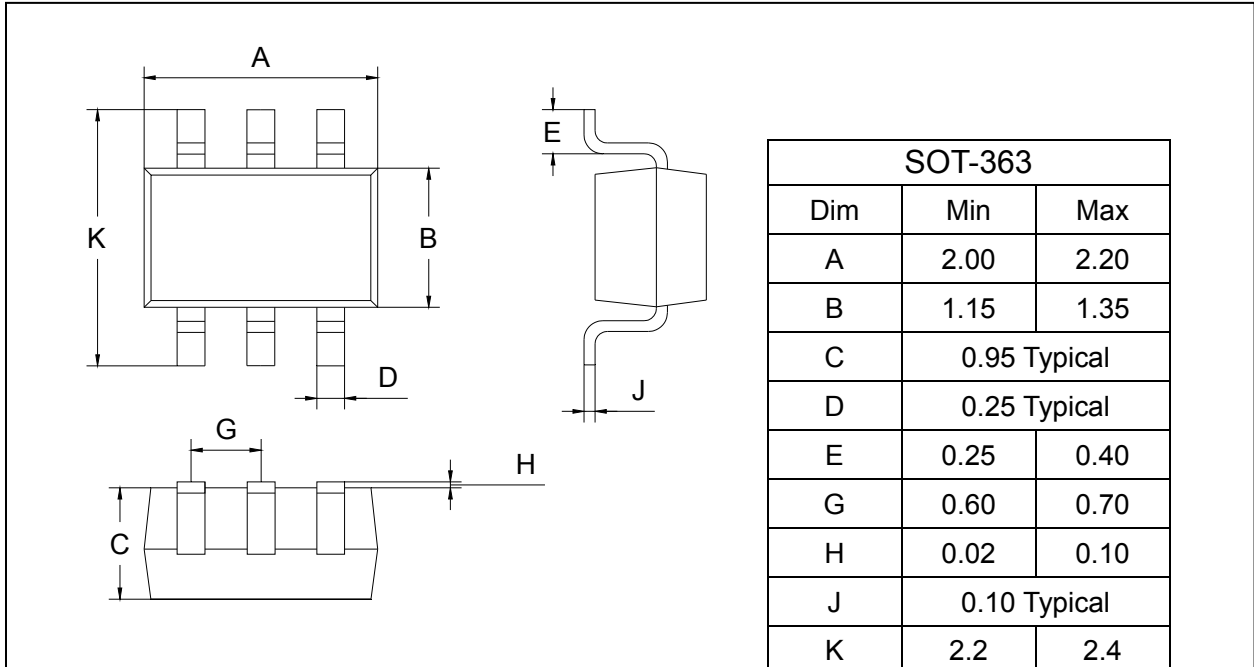

SOT-363		
Dim	Min	Max
A	2.00	2.20
B	1.15	1.35
C	0.95 Typical	
D	0.25 Typical	
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.10 Typical	
K	2.2	2.4

All Dimensions in mm

**SOLDERING FOOTPRINT**

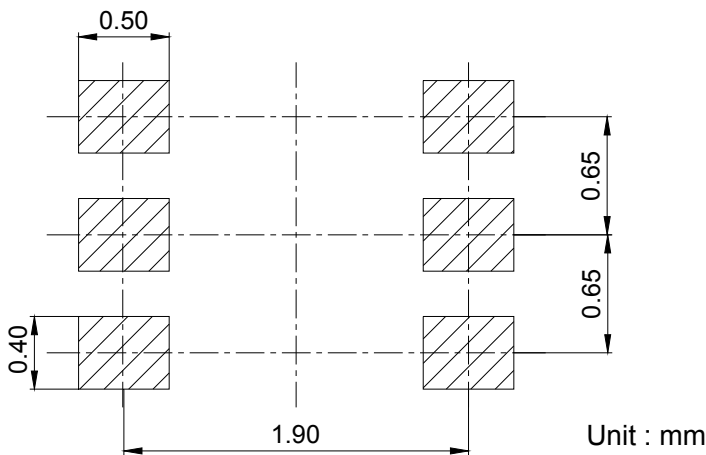

**PACKAGE INFORMATION**

Device	Package	Shipping
BAV99BRW	SOT-363	3000/Tape&Reel