

BZT52C2V0S-BZT52C39S

Surface mount zener diode

Features

- Planar die construction.
- General purpose, medium current.
- Ideally suited for automated assembly processes.
- RoHS compliant package

Applications



- Zener diode.
- Ultra-small surface mount package.SOD-323

Packing & Order Information


3,000/Reel



**RoHS
COMPLIANT**

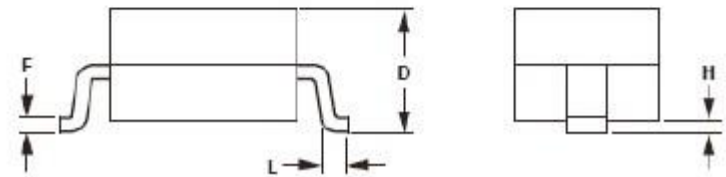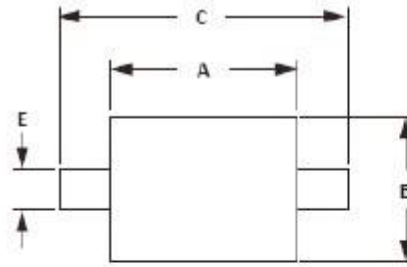

Graphic symbol



| DIM | OUTLINE DIMENSIONS | | | |
|-----|--------------------|------|--------|-------|
| | MILLIMETERS | | INCHES | |
| | MIN | MAX | MIN | MAX |
| A | 1.60 | 1.90 | 0.063 | 0.075 |
| B | 1.15 | 1.45 | 0.045 | 0.057 |
| C | 2.39 | 2.70 | 0.094 | 0.106 |
| D | 0.80 | 1.10 | 0.031 | 0.043 |
| E | 0.25 | 0.40 | 0.010 | 0.016 |
| F | 0.10 | 0.20 | 0.004 | 0.008 |
| H | - | 0.10 | - | 0.004 |
| L | 0.20 | - | 0.008 | - |

NOTES
 1. Controlling dimension: millimeters.
 2. Dimensioning and tolerances per ANSI Y14.5M, 1985.
 3. Dimensions are exclusive of mold flash and metal burrs.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum Ratings (Tc=25°C unless otherwise noted)

| Symbol | Parameter | Value | Unit |
|--------|---|-------------|------|
| VF | Forward Voltage @ IF=10mA | 0.9 | V |
| PD | Power Dissipation | 200 | mW |
| RθJA | Thermal resistance, junction to ambient air | 625 | °C/W |
| TJ | Junction temperature | 150 | °C |
| Tstg | Storage temperature range | -65 to +150 | °C |

Notes:

1. Valid provided that device terminals are kept at ambient temperature.
2. Short duration test pulse used in minimize self-heating effect.
3. f = 1KHz.

BZT52C2V0S-BZT52C39S

Surface mount zener diode





Electrical characteristics (Tc=25°C unless otherwise noted)

| Type Number | Marking Code | Zener Voltage Range | | | | Maximum Zener Impedance | | | Maximum Reverse Current | | Temperature Coefficient of zener voltage @ IZTC mV/°C | |
|-------------|--------------|---------------------|--------|--------|-----|-------------------------|---------|-----|-------------------------|------|---|------|
| | | VZ@IZT | | | IZT | ZZT@IZT | ZZK@IZK | IZK | IR | @VR | Min | Max |
| | | Nom(V) | Min(V) | Max(V) | mA | Ω | | mA | μA | V | | |
| BZT52C2V0S | WY | 2.0 | 1.91 | 2.09 | 5 | 100 | 600 | 1.0 | 150 | 1.0 | -3.5 | 0 |
| BZT52C2V4S | WX | 2.4 | 2.2 | 2.60 | 5 | 100 | 600 | 1.0 | 50 | 1.0 | -3.5 | 0 |
| BZT52C2V7S | W1 | 2.7 | 2.5 | 2.9 | 5 | 100 | 600 | 1.0 | 20 | 1.0 | -3.5 | 0 |
| BZT52C3V0S | W2 | 3.0 | 2.8 | 3.2 | 5 | 95 | 600 | 1.0 | 10 | 1.0 | -3.5 | 0 |
| BZT52C3V3S | W3 | 3.3 | 3.1 | 3.5 | 5 | 95 | 600 | 1.0 | 5 | 1.0 | -3.5 | 0 |
| BZT52C3V6S | W4 | 3.6 | 3.4 | 3.8 | 5 | 90 | 600 | 1.0 | 5 | 1.0 | -3.5 | 0 |
| BZT52C3V9S | W5 | 3.9 | 3.7 | 4.1 | 5 | 90 | 600 | 1.0 | 3 | 1.0 | -3.5 | 0 |
| BZT52C4V3S | W6 | 4.3 | 4.0 | 4.6 | 5 | 90 | 600 | 1.0 | 3 | 1.0 | -3.5 | 0 |
| BZT52C4V7S | W7 | 4.7 | 4.4 | 5.0 | 5 | 80 | 500 | 1.0 | 3 | 2.0 | -2.7 | 0.2 |
| BZT52C5V1S | W8 | 5.1 | 4.8 | 5.4 | 5 | 60 | 480 | 1.0 | 2 | 2.0 | -2.0 | 1.2 |
| BZT52C5V6S | W9 | 5.6 | 5.2 | 6.0 | 5 | 40 | 400 | 1.0 | 1 | 2.0 | 0.4 | 2.5 |
| BZT52C6V2S | WA | 6.2 | 5.8 | 6.6 | 5 | 10 | 150 | 1.0 | 3 | 4.0 | 1.2 | 3.7 |
| BZT52C6V8S | WB | 6.8 | 6.4 | 7.2 | 5 | 15 | 80 | 1.0 | 2 | 4.0 | 2.5 | 4.5 |
| BZT52C7V5S | WC | 7.5 | 7.0 | 7.9 | 5 | 15 | 80 | 1.0 | 1 | 5.0 | 3.2 | 5.3 |
| BZT52C8V2S | WD | 8.2 | 7.7 | 8.7 | 5 | 15 | 80 | 1.0 | 0.7 | 5.0 | 3.8 | 6.2 |
| BZT52C9V1S | WE | 9.1 | 8.5 | 9.6 | 5 | 15 | 100 | 1.0 | 0.5 | 6.0 | 4.5 | 7.0 |
| BZT52C10S | WF | 10 | 9.4 | 10.6 | 5 | 20 | 150 | 1.0 | 0.2 | 7.0 | 5.4 | 8.0 |
| BZT52C11S | WG | 11 | 10.4 | 11.6 | 5 | 20 | 150 | 1.0 | 0.1 | 8.0 | 6.0 | 9.0 |
| BZT52C12S | WH | 12 | 11.4 | 12.7 | 5 | 25 | 150 | 1.0 | 0.1 | 8.0 | 7.0 | 10.0 |
| BZT52C13S | WI | 13 | 12.4 | 14.1 | 5 | 30 | 170 | 1.0 | 0.1 | 8.0 | 7.0 | 11.0 |
| BZT52C15S | WJ | 15 | 13.8 | 15.6 | 5 | 30 | 200 | 1.0 | 0.1 | 10.5 | 9.2 | 13.0 |
| BZT52C16S | WK | 16 | 15.3 | 17.1 | 5 | 40 | 200 | 1.0 | 0.1 | 11.2 | 10.4 | 14.0 |
| BZT52C18S | WL | 18 | 16.8 | 19.1 | 5 | 45 | 225 | 1.0 | 0.1 | 12.6 | 12.4 | 16.0 |
| BZT52C20S | WM | 20 | 18.8 | 21.2 | 5 | 55 | 225 | 1.0 | 0.1 | 14.0 | 14.4 | 18.0 |
| BZT52C22S | WN | 22 | 20.8 | 23.3 | 5 | 55 | 250 | 1.0 | 0.1 | 15.4 | 16.4 | 20.0 |
| BZT52C24S | WO | 24 | 22.8 | 25.6 | 5 | 70 | 250 | 1.0 | 0.1 | 16.8 | 18.4 | 22.0 |
| BZT52C27S | WP | 27 | 25.1 | 28.9 | 5 | 80 | 300 | 0.5 | 0.1 | 18.9 | 21.4 | 25.3 |
| BZT52C30S | WQ | 30 | 28.0 | 32.0 | 5 | 80 | 300 | 0.5 | 0.1 | 21.0 | 24.4 | 29.4 |
| BZT52C33S | WR | 33 | 31.0 | 35.0 | 5 | 80 | 325 | 0.5 | 0.1 | 23.1 | 27.4 | 33.4 |
| BZT52C36S | WS | 36 | 34.0 | 38.0 | 5 | 90 | 350 | 0.5 | 0.1 | 25.2 | 30.4 | 37.4 |
| BZT52C39S | WT | 39 | 37.0 | 41.0 | 5 | 130 | 350 | 0.5 | 0.1 | 27.3 | 33.4 | 41.2 |

BZT52C2V0S-BZT52C39S

Surface mount zener diode

■ RATINGS AND CHARACTERISTIC CURVES

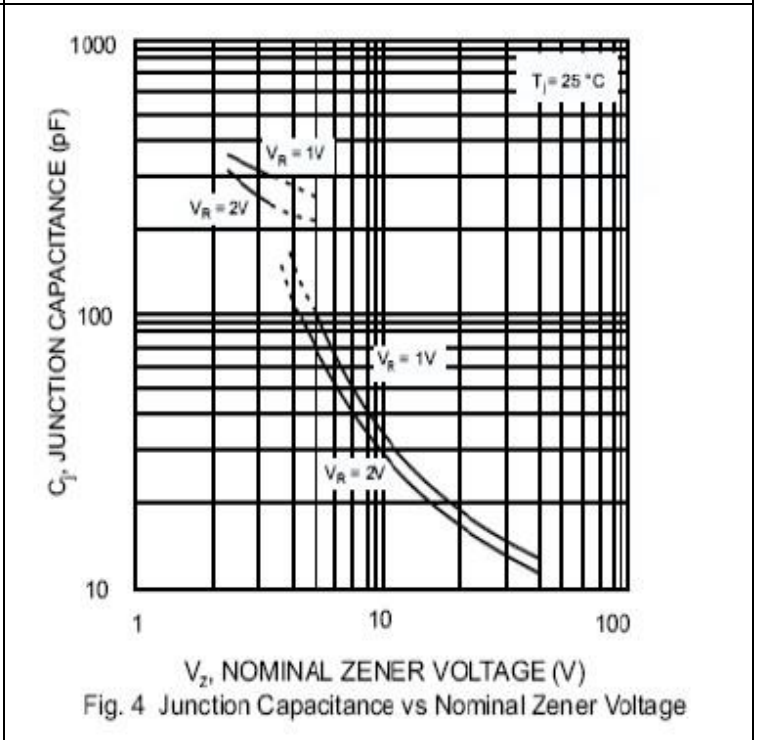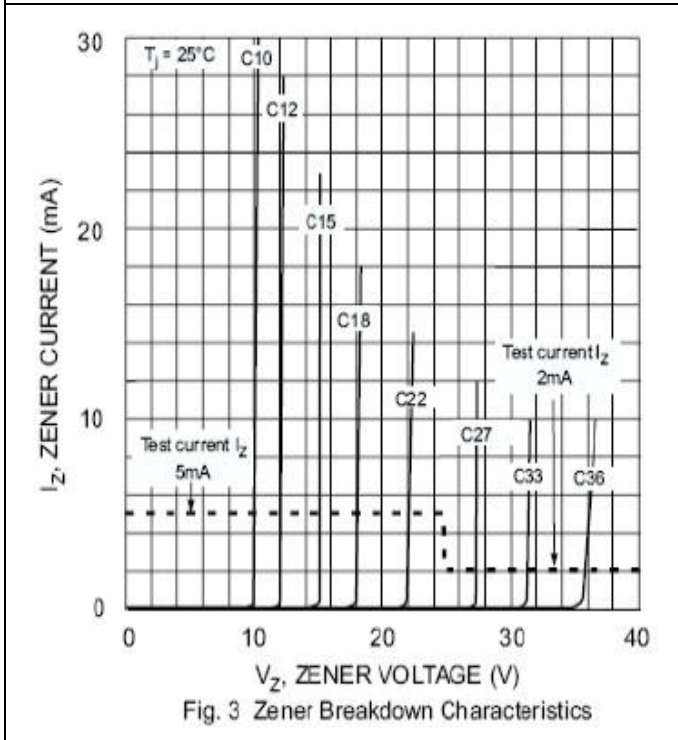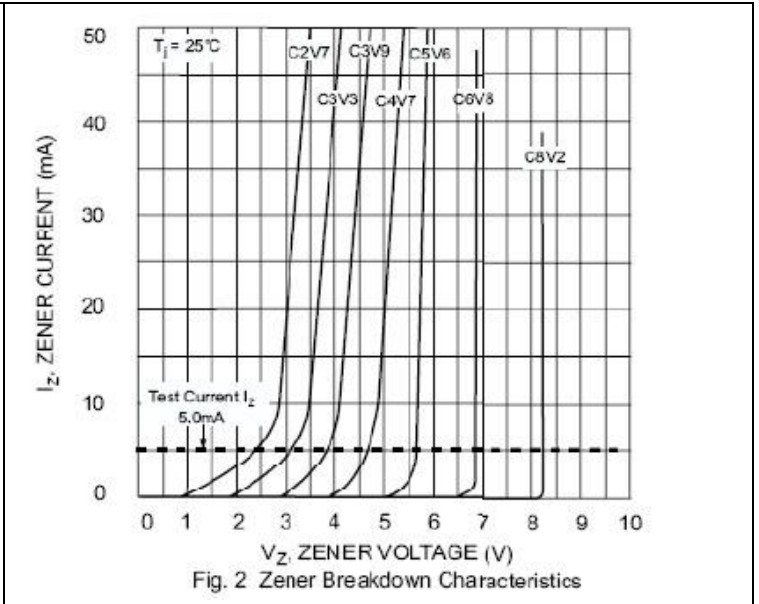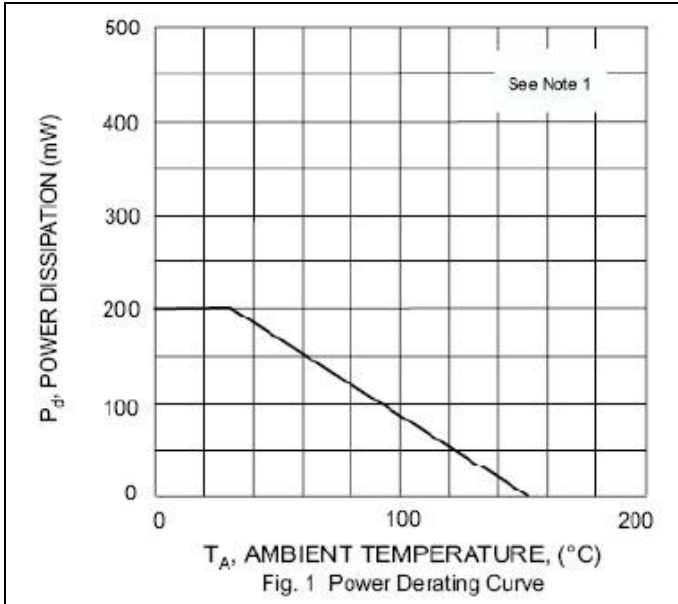

BZT52C2V0S-BZT52C39S

Surface mount zener diode

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE

WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.