

iscN-Channel MOSFET Transistor

TK10A80W, ITK10A80W

• FEATURES

- Low drain-source on-resistance: $R_{DS(ON)} = 0.46\Omega$ (typ.)
- Enhancement mode: $V_{th} = 3.0$ to $4.0V$ ($V_{DS} = 10 V$, $I_D=0.45mA$)
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• DESCRIPTION



- Switching Voltage Regulators

• ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	800	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current-Continuous	9.5	A
I_{DM}	Drain Current-Single Pulsed	38	A
P_D	Total Dissipation @ $T_c=25^\circ C$	40	W
T_j	Max. Operating Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~150	°C

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	3.12	°C/W
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	62.5	°C/W

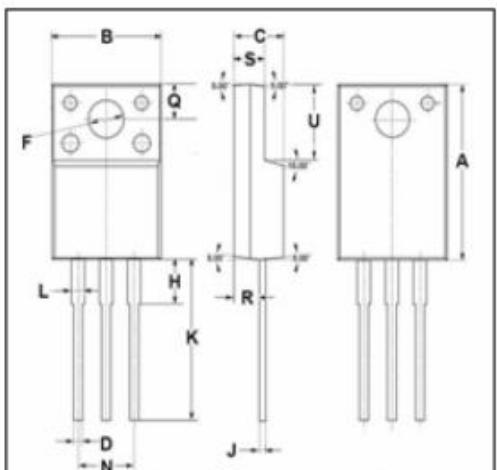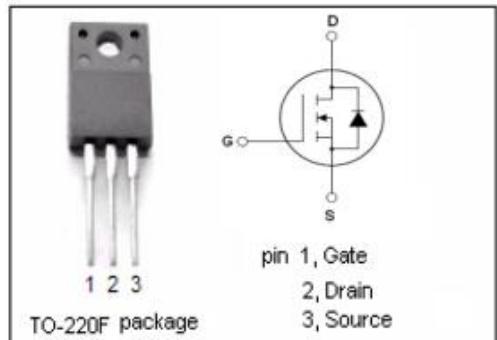

DIM	mm	
	MIN	MAX
A	14.95	15.05
B	10.00	10.10
C	4.40	4.60
D	0.75	0.90
F	3.10	3.30
H	3.70	3.90
J	0.50	0.70
K	13.4	13.6
L	1.10	1.30
N	5.00	5.20
Q	2.70	2.90
R	2.20	2.40
S	2.65	2.90
U	6.40	6.60

iscN-Channel MOSFET Transistor

TK10A80W, ITK10A80W

ELECTRICAL CHARACTERISTICS

T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V; I _D = 10mA	800			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = 10V; I _D =0.45mA	3.0		4.0	V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} = 10V; I _D =4.8A		460	550	mΩ
I _{GSS}	Gate-Source Leakage Current	V _{GS} = ±20V; V _{DS} = 0V			±1	μA
I _{DSS}	Drain-Source Leakage Current	V _{DS} = 800V; V _{GS} = 0V			10	μA
V _{SDF}	Diode forward voltage	I _{DR} =9.5A, V _{GS} = 0 V			1.7	V