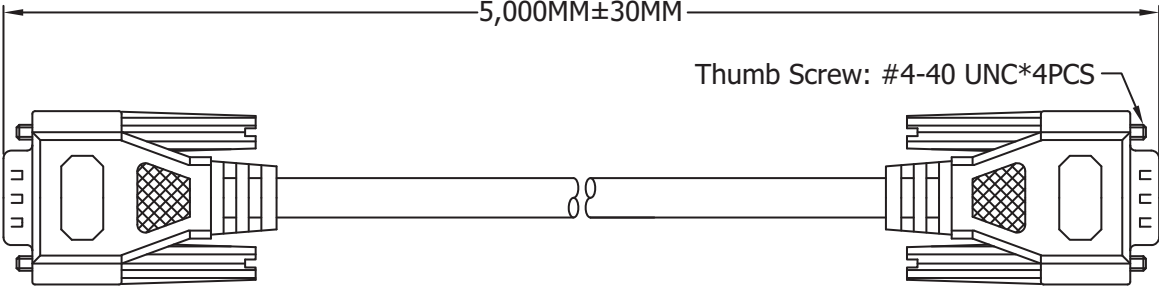


	1	2	3	4	5	6	7	
A	HD 15 Male 11 1 15 5 P1 5,000MM±30MM Thumb Screw: #4-40 UNC*4PCS  HD 15 Male 5 15 1 11 P2							A
B								B
C	PIN Assignment P1 1 2 3 4 5 6 7 8 10 11 12 13 14 15 WHITE GREY YELLOW PINK ORANGE RED BROWN GREEN BLUE PURPLE LIGHT GREEN LIGHT BLUE BLACK WHITE/BLACK Shell DRAIN Shell P2 1 2 3 4 5 6 7 8 10 11 12 13 14 15							C
D	Material: 1. CABLE: NON-UL 28AWG(7/0.127)TC*14C INS:PVC+DRAIN WIRE(26AWG 7/0.16)+AL-FOIL/MYLAR PVC JACKET COLOR:BEIGE, OD:6.0±0.2mm 2. CONNECTOR: P1&P2:HD15P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL(THE 9TH PIN UNLOAD) 3. HOOD:MOLDED TYPE PVC 45P COLOR:BEIGE. 4. ELECTRICAL TEST: <1>100% OPEN SHORT & MIS WIRE TEST. <2>CONTACT RESISTANCE 3 Ohms MAX. <3>INSULATION RESISTANCE 20M Ohms MIN. 5. PACKING:SEE P-0039 REV.C PACKING DRAWING+EAN CODE PACKING TYPE: DB VP4 (HANKING SIZE MUST BE SMALLER THAN PACKING)							D
E								E
F								F
G	Scale 1:1 TOLERANCE X.X ±0.40 X.XX ±0.25 X.XXX ±0.15 Angle ±3° Modification Date Name RoHS Complaint ASSMANN components Item No. AK377-R Title VGA Monitor Extension Cable, HD D-Sub 15 pin Male <=> Male, 5 Meters Drawing No. rev00 Replace Sheet							G
H								H
	1	2	3	4	5	6	7	