

FEATURES

- ▶ Industrial Standard SIP-7 Package
- ▶ Ultra-high I/O Isolation 5200VDC
- ▶ Common Mode Transient Immunity : 15KV/ μ s
- ▶ Qualified for IGBT and High Isolation Applications
- ▶ Operating Temp. Range -40°C to +88°C
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval(Pending)



PRODUCT OVERVIEW

The MINMAX MAEU02-HI series is a new range of isolated 2W DC/DC converter modules in SIP-7 package which feature a very high I/O-isolation voltage rated for 5700VDC. A very high common mode transient immunity with 15KV/ μ s qualifies these product for IGBT driver applications. There are 40 models available for 5, 12, 15 and 24V input. These converters offer a cost-effective solution for wind turbine, solar panel, transportation systems, industrial control equipments and some IGBT driver applications where a very high I/O-isolation is required.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current		Input Current		Load Regulation	Max. capacitive Load	Efficiency (typ.) @Max. Load	
			Max.	Min.	@Max. Load	@No Load				
			VDC	VDC	mA	mA	mA(typ.)	mA(typ.)	% (max.)	μ F
MAEU02-05S033HI	5 ±10%	3.3	500	10	446		35	20	1650	74
MAEU02-05S05HI		5	400	8	500			15	940	80
MAEU02-05S09HI		9	222	4.4	493			10	940	81
MAEU02-05S12HI		12	168	3.4	492			10	440	82
MAEU02-05S15HI		15	132	2.6	501			10	440	79
MAEU02-05D05HI		±5	±200	±4	513			15	440#	78
MAEU02-05D09HI		±9	±112	±2.2	504			10	440#	80
MAEU02-05D12HI		±12	±84	±1.7	504			10	200#	80
MAEU02-05D15HI		±15	±66	±1.3	501			10	200#	79
MAEU02-05A1509HI		15	66	1.3		495		10	200	80
MAEU02-12S033HI	12 ±10%	3.3	500	10	181		17	20	1650	76
MAEU02-12S05HI		5	400	8	211			15	940	79
MAEU02-12S09HI		9	222	4.4	206			10	940	81
MAEU02-12S12HI		12	168	3.4	202			10	440	83
MAEU02-12S15HI		15	132	2.6	201			10	440	82
MAEU02-12D05HI		±5	±200	±4	211			15	440#	79
MAEU02-12D09HI		±9	±112	±2.2	207			10	440#	81
MAEU02-12D12HI		±12	±84	±1.7	205			10	200#	82
MAEU02-12D15HI		±15	±66	±1.3	199			10	200#	83
MAEU02-12A1509HI		15	66	1.3		204		10	200	81
MAEU02-15S033HI	15 ±10%	3.3	500	10	143		16	20	1650	77
MAEU02-15S05HI		5	400	8	169			15	940	79
MAEU02-15S09HI		9	222	4.4	160			10	940	83
MAEU02-15S12HI		12	168	3.4	162			10	440	83
MAEU02-15S15HI		15	132	2.6	155			10	440	85
MAEU02-15D05HI		±5	±200	±4	165			15	440#	81
MAEU02-15D09HI		±9	±112	±2.2	160			10	440#	84
MAEU02-15D12HI		±12	±84	±1.7	164			10	200#	82
MAEU02-15D15HI		±15	±66	±1.3	161			10	200#	82
MAEU02-15A1509HI		15	66	1.3		159		10	200	83
MAEU02-24S033HI	24 ±10%	3.3	500	10	90		12	20	1650	76
MAEU02-24S05HI		5	400	8	108			15	940	77
MAEU02-24S09HI		9	222	4.4	103			10	940	81
MAEU02-24S12HI		12	168	3.4	102			10	440	82
MAEU02-24S15HI		15	132	2.6	101			10	440	82
MAEU02-24D05HI		±5	±200	±4	108			15	440#	77
MAEU02-24D09HI		±9	±112	±2.2	104			10	440#	81
MAEU02-24D12HI		±12	±84	±1.7	104			10	200#	81
MAEU02-24D15HI		±15	±66	±1.3	103			10	200#	80
MAEU02-24A1509HI		15	66	1.3		102		10	200	81

For each output



Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	VDC
	12V Input Models	-0.7	---	18	
	15V Input Models	-0.7	---	20	
	24V Input Models	-0.7	---	30	
Input Voltage Range	5V Input Models	4.5	5	5.5	
	12V Input Models	10.8	12	13.2	
	15V Input Models	13.5	15	16.5	
	24V Input Models	21.6	24	26.4	
Short Circuit Input Power		---	---	1000	mW
Input Filter	All Models			Internal Capacitor Type	

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	---	± 5.0	%
Output Voltage Balance	Dual Output, Balanced Loads	---	± 0.1	± 1.0	%
Line Regulation	For Vin Change of 1%	---	± 1.2	---	%
Load Regulation	$Io=20\% \text{ to } 100\%$			See Model Selection Guide	
Ripple & Noise	0-20MHz Bandwidth	---	---	100	mV P-P
Temperature Coefficient		---	± 0.01	± 0.02	%/°C
Short Circuit Protection				Continuous, Automatic Recovery	

Isolation, Safety Standards

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Rated for 60 seconds	5200	---	---	VDC
	Tested for 1 second	5700	---	---	VDC
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100KHz, 1V	---	7	---	pF
Common Mode Transient Immunity		15	---	---	KV/μs
Safety Approvals(Pending)	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-report)				


General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency		---	100	---	KHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	TBD	---	---	Hours

Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+80	°C
Case Temperature		---	+95	°C
Storage Temperature Range		-55	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Natural Convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

Power Derating Curve

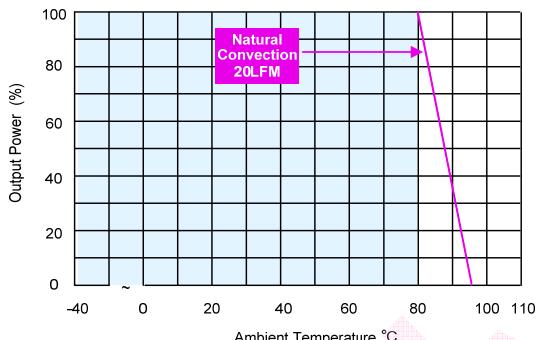


Notes

- 1 Specifications typical at $T_a=+25^\circ\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 6 Specifications are subject to change without notice.

Package Specifications

Mechanical Dimensions

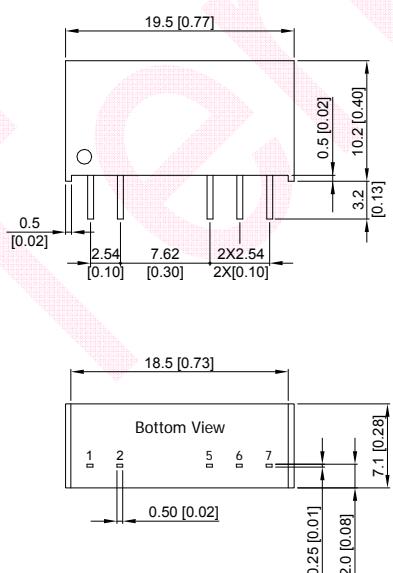

Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	No Pin	Common
7	+Vout	+Vout

- All dimensions in mm (inches)
- Tolerance: $X.X \pm 0.5$ ($X.XX \pm 0.02$)
 $X.XX \pm 0.25$ ($X.XXX \pm 0.01$)
- Pins ± 0.05 (± 0.002)


Physical Characteristics

Case Size	: 19.5x7.1x10.2mm (0.77x0.28x0.40 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Tinned Copper
Weight	: TBD

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} $0.33\mu F$ ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

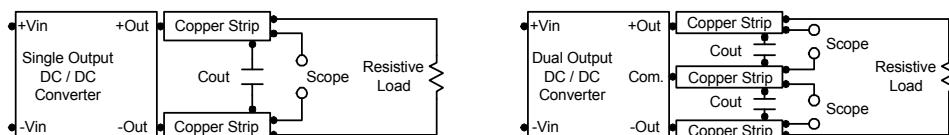

Technical Notes


Maximum Capacitive Load

The MAEU02-HI series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Input Source Impedance


The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 KHz) capacitor of a $2.2\mu F$ for the 5V input devices, a $1.0\mu F$ for the 12V,15V input devices and a $0.47\mu F$ for the 24V devices.

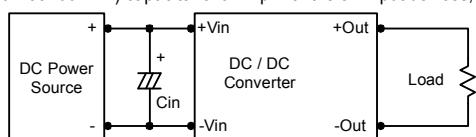

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use $1.0\mu F$ capacitors at the output.

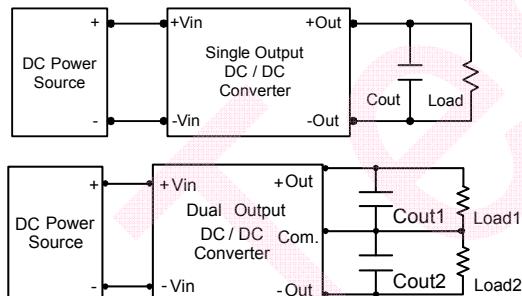

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below $100^{\circ}C$. The derating curves are determined from measurements obtained in a test setup.

