

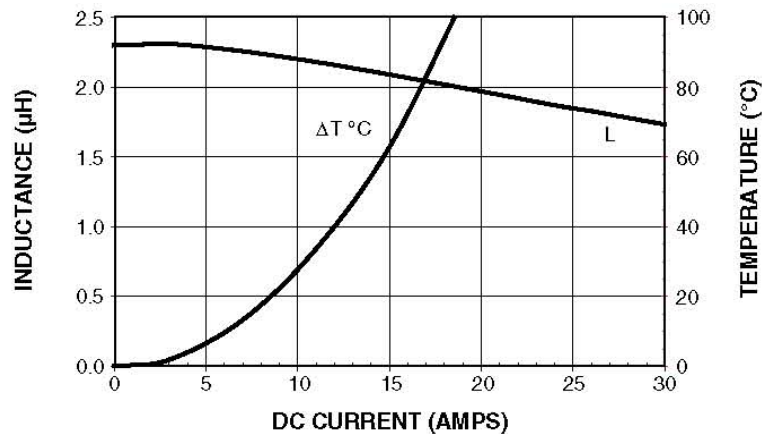


1. Mechanical Dimensions:

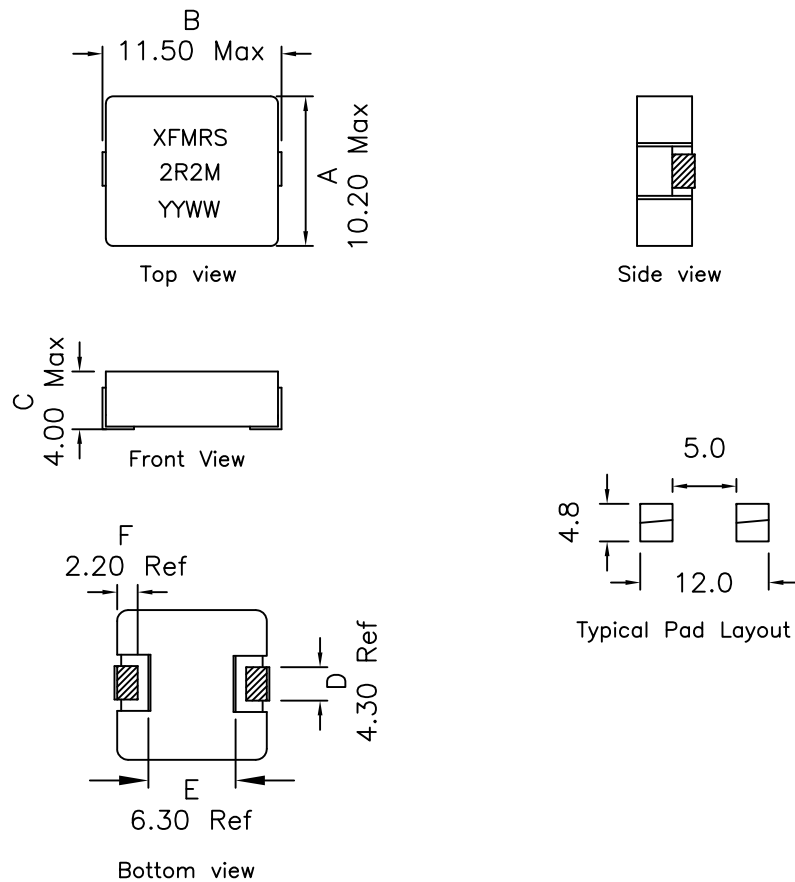

DOC. REV: A/6

2. Schematic:



3. Electrical Specifications: @25°C

OCL: $2.2\mu\text{H} \pm 20\%$ @100KHz, 0.25V

Q: 15.0 Min @100KHz, 0.25V

DCR: 9.0 mOhms Max

Irated: 12.0A Typ (Based on 40°C Temp Rise)

Isat: 25.6A Typ (Based on 20% drop in OCL)

SRF: 20MHz Typ

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- SMD Lead Coplanarity: $\pm 0.004"$ (0.102mm)
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component
- Outsourced item processed & controlled under XFMRS QA system

XFMRS Inc www.XFMRS.com	Title: XFHCL11 SERIES INDUCTORS		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.25 Dimensions in mm	P/N: XFHCL11-2R2M	REV. A
SHEET 1 OF 1	DWN.	Yuan	May-21-15
	CHK.	YK Liao	May-21-15
	APP.	DDC	May-21-15