


## Subminiature Toggle Switch

## A9T

### Double-sided clip contact mechanism combined with see-saw action.

- Gold-plated clip contact and cleaning mechanisms ensure high reliability.
- Specially designed to prevent grease entry into the contact portion.
- Sealed against flux entry.
- Washable, equivalent to IP64 (IEC-60529).







RoHS Compliant

#### Typical Applications





Security Control Boards  
Electric Power Instrumentation  
Program Controllers

#### ■ List of Models





##### ● DIP Terminal Models

Actuator Shapes			Standard		Quantity per bag
Switching Functions					
					
ON	—	ON	<b>A9T11-0011</b>	<b>A9T21-0011</b>	100
ON	OFF	ON	<b>A9T12-0011</b>	<b>A9T22-0011</b>	
(ON)	—	ON	<b>A9T13-0011</b>	<b>A9T23-0011</b>	
(ON)	OFF	(ON)	<b>A9T14-0011</b>	<b>A9T24-0011</b>	
(ON)	OFF	ON	<b>A9T15-0011</b>	<b>A9T25-0011</b>	

##### ● Right Angle Terminal Models

Actuator Shapes			Standard		Quantity per bag
Switching Functions					
					
ON	—	ON	<b>A9T11-0012</b>	<b>A9T21-0012</b>	100
ON	OFF	ON	<b>A9T12-0012</b>	<b>A9T22-0012</b>	
(ON)	—	ON	<b>A9T13-0012</b>	<b>A9T23-0012</b>	
(ON)	OFF	(ON)	<b>A9T14-0012</b>	<b>A9T24-0012</b>	
(ON)	OFF	ON	<b>A9T15-0012</b>	<b>A9T25-0012</b>	

● Vertical Mount Terminal Models

Actuator Shapes			Standard		Quantity per bag
Switching Functions					
			SPDT	DPDT	
ON	—	ON	<b>A9T11-0013</b>	<b>A9T21-0013</b>	100
ON	OFF	ON	<b>A9T12-0013</b>	<b>A9T22-0013</b>	
(ON)	—	ON	<b>A9T13-0013</b>	<b>A9T23-0013</b>	
(ON)	OFF	(ON)	<b>A9T14-0013</b>	<b>A9T24-0013</b>	
(ON)	OFF	ON	<b>A9T15-0013</b>	<b>A9T25-0013</b>	





- Note:** 1. (ON) shows Momentary.  
 2. Switching Functions show the view from the side of Type and Brand name marking.  
 3. Actuator does not stop at "-" position.

■ Ratings/Characteristics



<b>Ratings</b>	50 mA at 60 VAC/DC, 1 μA (minimum current) at 20 mVAC/DC	
<b>Ambient operating temperature</b>	-20 to +80 °C 60% RH max. (with no icing or condensation)	
<b>Ambient operating humidity</b>	45 to 85%RH (at +5 to +35 °C )	
<b>Insulation resistance</b>	1,000 MΩ min. (Initial value)	
<b>Contact resistance</b>	50 mΩ max. (Initial value)	
<b>Dielectric strength</b>	500 VAC for 1 min between terminals, between terminals and ground	
<b>Vibration resistance</b>	<b>Malfunction</b>	10 to 55 Hz, 1.5-mm double amplitude
<b>Shock resistance</b>	<b>Malfunction</b>	500 m/s <sup>2</sup> min.
<b>Durability</b>	<b>Mechanical</b>	50,000 operations min.
	<b>Electrical</b>	50,000 operations min.
<b>Operating force</b>	0.49 to 3.43 N {50 to 350 gf}	
<b>Weight</b>	<b>DIP Terminal</b>	Standard: 0.8 g
	<b>Right Angle Terminal</b>	Standard: 1 g
	<b>Vertical Mount Terminal</b>	Standard: 1 g

■ Dimensions (Unit: mm)

● DIP Terminal Models

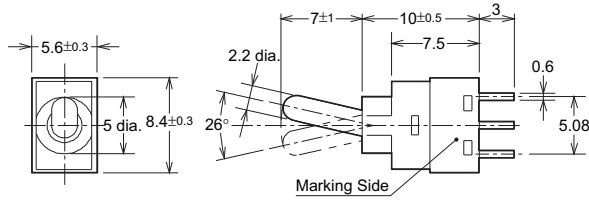





Single Pole Type Double Pole Type  
PCB Dimensions (Top View)



Single Pole Type Double Pole Type



Note: No. (1) and (3) terminals in the SPDT models are dummies to support the Switch case.

● Right Angle Terminal Models

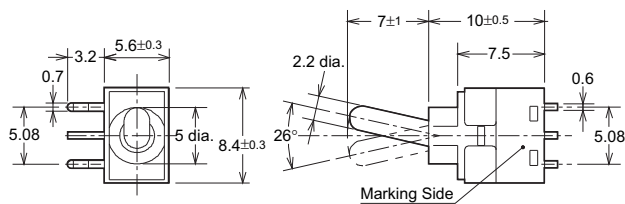





Single Pole Type Double Pole Type

PCB Dimensions (Top View)





Single Pole Type Double Pole Type

● Vertical Mount Terminal Models

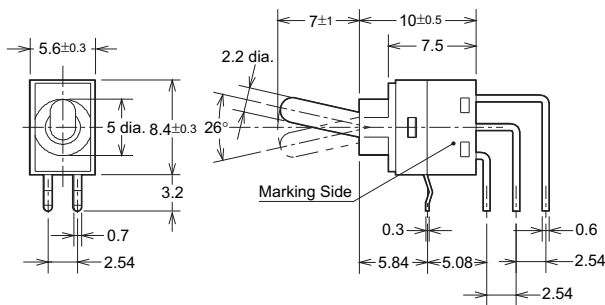

Single Pole Type Double Pole Type






























PCB Dimensions (Top View)



Single Pole Type Double Pole Type

Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

■ Switching Function / Internal Connections

	Switching Functions			Contact Forms		
						
SPDT Models	ON	—	ON		—	
	ON	OFF	ON			
	(ON)	—	ON		—	
	(ON)	OFF	(ON)			
	(ON)	OFF	ON			
DPDT Models	ON	—	ON		—	
	ON	OFF	ON			
	(ON)	—	ON		—	
	(ON)	OFF	(ON)			
	(ON)	OFF	ON			

Note: (ON) shows Momentary.

■ Safety Precautions

Be sure to read the Safety precautions common to all PCB-mount Manual Switches for correct use.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note: Do not use this document to operate the Unit.**