
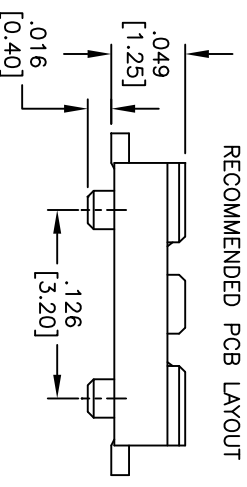
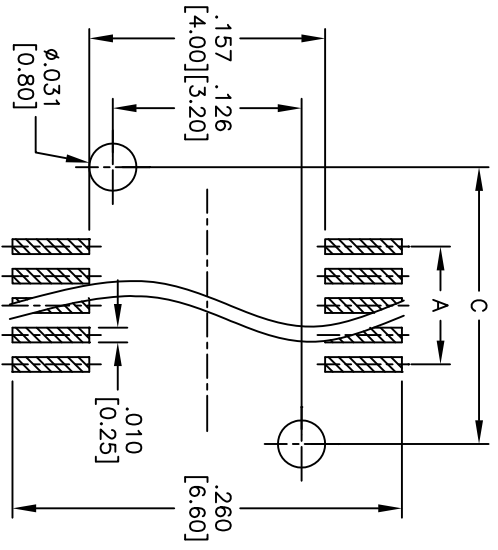
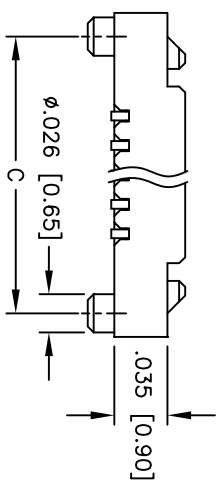


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/07/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

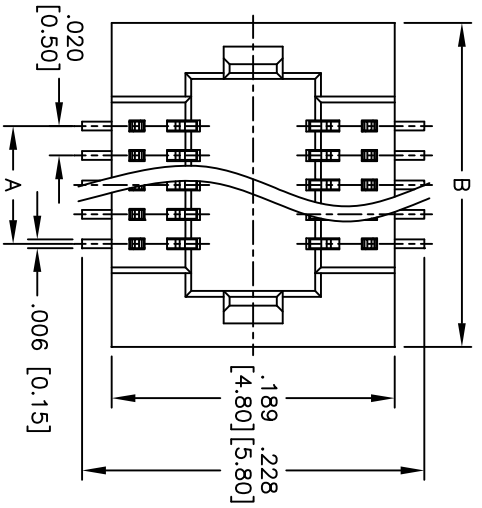

PACKAGED ON TAPE & REEL

Positions: 10 thru 60  
 A = .020 [0.50] x (No. of Contacts per row - 1)  
 B = .020 [0.50] x (No. of Contacts per row - 1) + .138 [3.50]  
 C = .020 [0.50] x (No. of Contacts per row - 1) + .106 [2.70]

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .020 [0.50] BOARD TO BOARD SOCKET, SMT TYPE  
 1.25MM HEIGHT, STACKING HEIGHT=1.5MM

**SPECIFICATIONS:**  
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: Natural  
 Contacts: Copper Alloy  
 Hold down: Copper Alloy  
 Plating: Gold flash over Nickel underplate overall.  
 Electrical: Operating voltage: 50 VAC max  
 Current rating: 0.5 Amps max  
 Contact resistance: 40 mohms max. initial  
 Insulation resistance: 500 Mohms min  
 Environmental: Lead free, RoHS compliant  
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDERS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	
DATE	12/07/10

REF: S0028T	SCALE: NTS	SHEET 1 OF 1
SIZE	PART NO.	REV.
X	BB5-SE-XX-G-1.25-T/R	-