
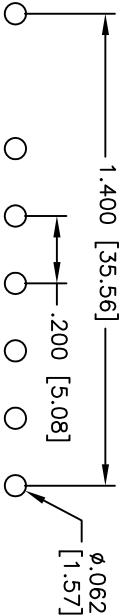

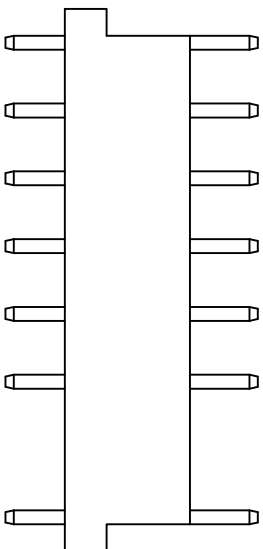
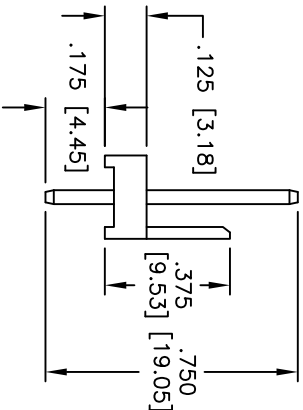
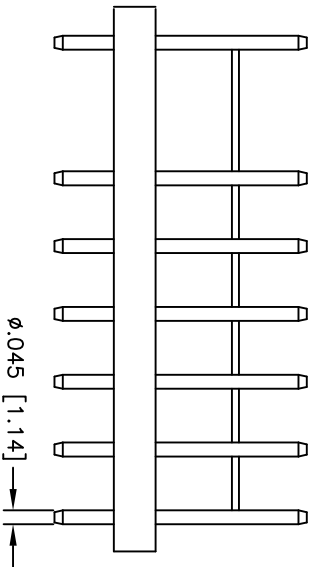


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/06/11	

APPROVED: _____

DATE: _____ TITLE: _____

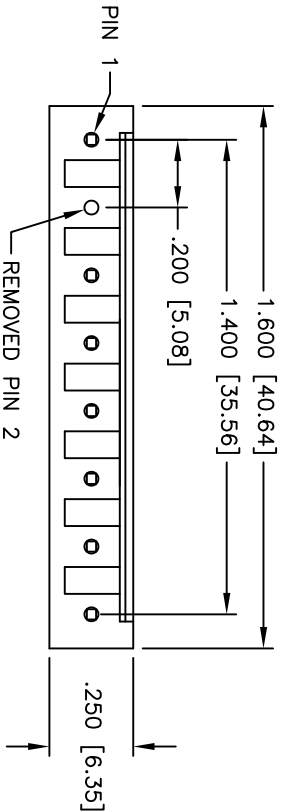

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- Material: Insulator: Nylon 66, rated UL 94V-2
Insulator color: Natural
Contacts: Brass
Plating: Tin over Nickel underplate overall
Electrical: Operating voltage: 250V AC/DC
Current rating: 3A AC/DC
Environmental: Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.200 [5.08] WIRE TO BOARD, STRAIGHT

ROUND PINS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				HOLD			
.X	± .10	Ø.X	± .10	DATE			
.XX	± .020	Ø.XX	± .015	DRAWN			
.XXX	± .015	Ø.XXX	± .010	CHECKED			
APPROVALS				APPROVED			
DRAWN				DATE			
DY				1/06/11			
SIZE				PART NO.			
X				LHN-08-TS-RP-X02			
REF: S00123T				SCALE: NTS			
SHEET 1 OF 1				REV.			