

6

5

4




3

2

1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/09	
A		UPDATE SPEC.	11/6/15	AY/TW

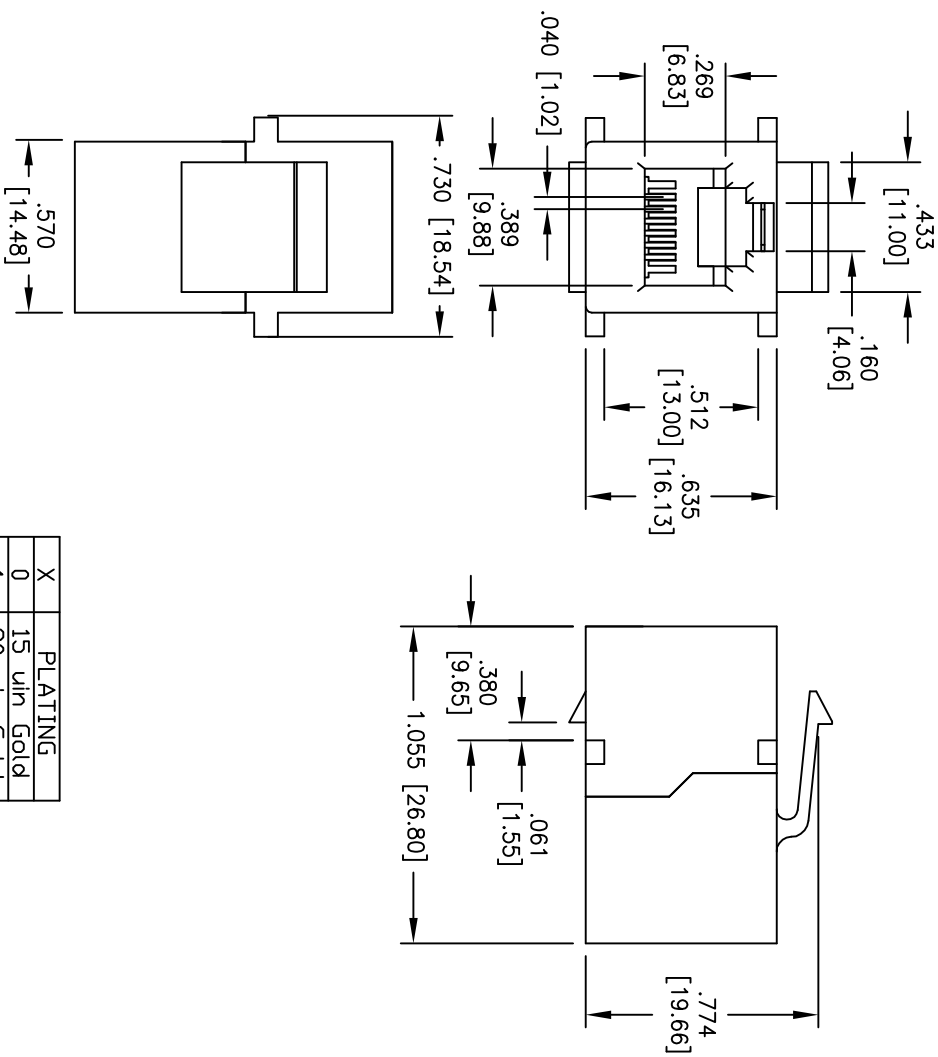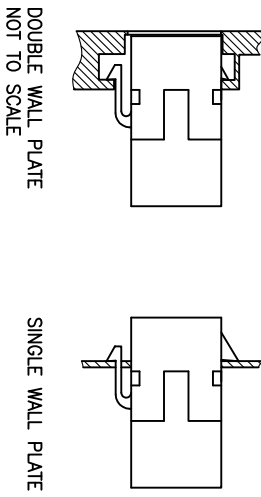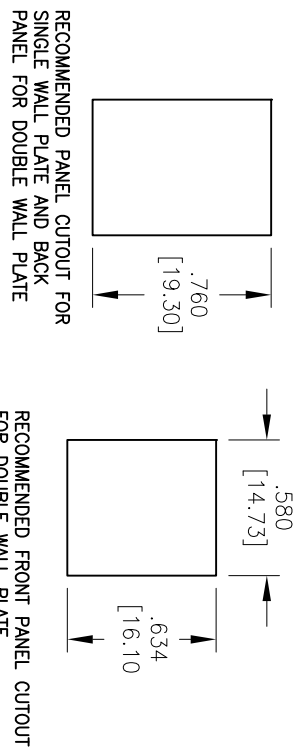

X	PLATING
0	15 uin Gold
1	30 uin Gold
2	50 uin Gold

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Flat contact

Gold over Nickel underplate on contact area,

Tin over Copper underplate on solder tails

Round contact

Gold over Nickel underplate overall

(See chart for thickness)

Electrical:

Operating voltage: 125 VAC max.

Current rating: 1.5 Amps max.

Contact resistance: 20 mohms max.

Insulation resistance: 1000 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Leade free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

.X ± 2.54
.XX ± .508
.XXX ± .381

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE MODULAR TELEPHONE JACK COUPLER
6P6C, PANEL MOUNT, COLOR BLACK

APPROVALS		DATE
DRAWN	DY	4/13/09
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	MTJC-66-X-B	A

REF: S00005C SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1