




RECOMMENDED PCB HOLES



▲ SWITCH FUNCTION

POS. 1	POS. 2	POS. 3
DN	NONE	DN
2-3,5-6	OPEN	2-1,5-4

CONTACT CONFIGURATION

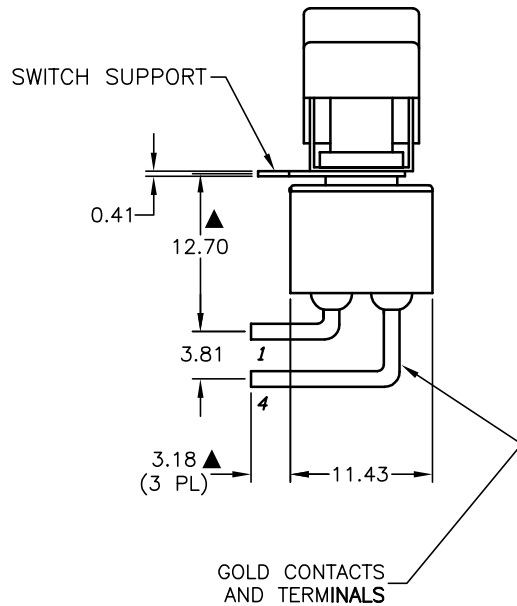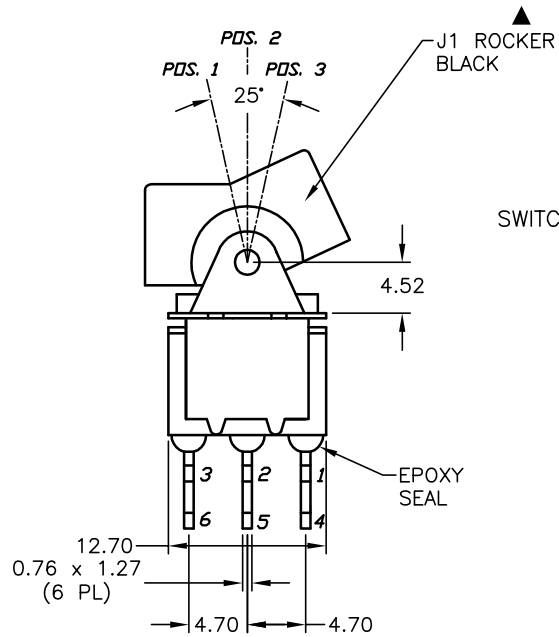

- NOTES:
- ALL DIMENSIONS IN MM
 - GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - RATING: .4VA MAX. @ 20V(AC or DC) MAX.
 - ▲ 5. CONTACTS: GOLD FLASH OVER SILVER PLATED COPPER.
 - ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
 - INSULATION RESISTANCE: 1,000 Mega-ohm min.
 - DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 - OPERATING TEMP.: -30°C to 85°C
 - ▲ DENOTES CRITICAL PARAMETER.

A	13948	RELEASED FOR PRODUCTION	4/22/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

E-SWITCH®				
TITLE 300AWDP1J1BLKM6RE				
SCALE	DATE	DR	DWG	REV
2:1	4/22/04	AR	T301006	A