



SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
NONE	1-2

(ON)=MOMENTARY

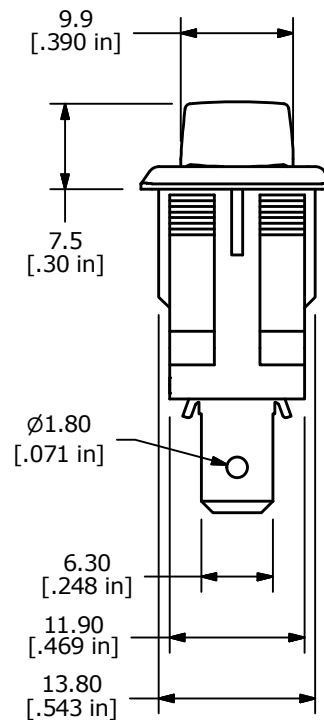

- NOTES:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 - TERM. NOS. FOR REF. ONLY
 - ▲** RATING: 20A @ 125VAC [cULus]
16A @ 250VAC [cULus]
 - ELECTRICAL LIFE: 10,000 CYCLES MIN.
 - CONTACT RESISTANCE: 20 m Ω MAX.
 - OPERATING TEMP: -20°C TO 85°C
 - DIELECTRIC STRENGTH: >1,000V AC 1MIN
 - INSULATION RESISTANCE: 100 M Ω @ 500VDC
 - ▲** DENOTES CRITICAL PARAMETER.
 - 2002/95/EC (ROHS) COMPLIANT.

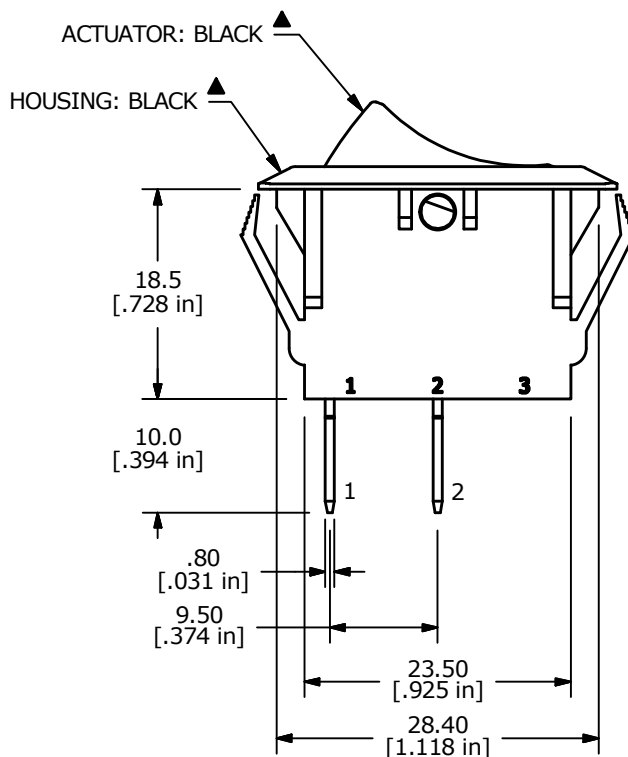

TITLE RSC144D1100				
SCALE 3:2	DATE 6/10/2015	DR MW	DWG 38-RSC144D1100	REV A

A	21872	CREATE REV. A DRAWING	6/10/15	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED