



## HIGH VOLTAGE DARLINGTON OUTPUT OPTICALLY COUPLED ISOLATOR

### APPROVALS

- UL recognised, File No. E91231  
Package Code " FF "

### 'X' SPECIFICATION APPROVALS

- VDE 0884 in 3 available lead form : -
  - STD
  - G form
  - SMD approved to CECC 00802

### DESCRIPTION


The IS627 is an optically coupled isolator consisting of infrared light emitting diode and a high voltage NPN silicon photo darlington which has an integral base-emitter resistor to optimise switching speed and elevated temperature characteristics in a standard 4 pin dual in line plastic package.

### FEATURES


- Options :-
  - 10mm lead spread - add G after part no.
  - Surface mount - add SM after part no.
  - Tape & reel - add SMT&R after part no.
- High Isolation Voltage (5.3kV<sub>RMS</sub>, 7.5kV<sub>PK</sub>)
- High Current Transfer Ratio (1000% min)
- High BV<sub>CEO</sub> (300V min.)
- Low input current 1mA I<sub>F</sub>

### APPLICATIONS

- Modems
- Copiers, facsimiles
- Numerical control machines
- Signal transmission between systems of different potentials and impedances

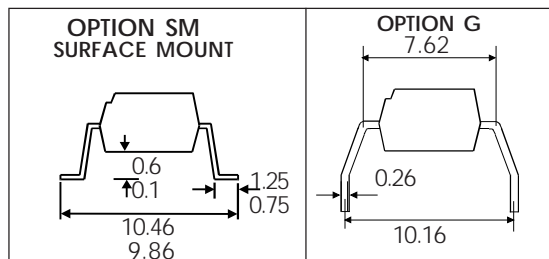

### Dimensions in mm

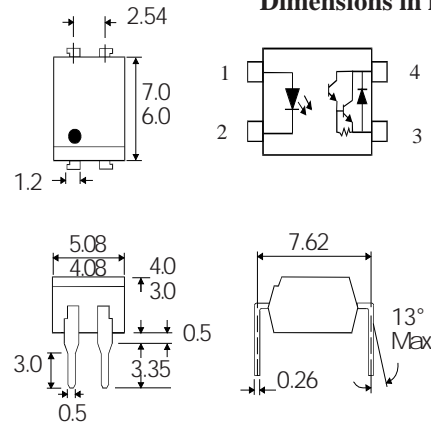

### ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature \_\_\_\_\_ -55°C to +125°C  
 Operating Temperature \_\_\_\_\_ -30°C to +100°C  
 Lead Soldering Temperature  
 (1/16 inch (1.6mm) from case for 10 secs) 260°C

### INPUT DIODE

Forward Current \_\_\_\_\_ 50mA  
 Reverse Voltage \_\_\_\_\_ 6V  
 Power Dissipation \_\_\_\_\_ 70mW

### OUTPUT TRANSISTOR

Collector-emitter Voltage BV<sub>CEO</sub> \_\_\_\_\_ 300V  
 Emitter-collector Voltage BV<sub>ECO</sub> \_\_\_\_\_ 0.1V  
 Collector Current I<sub>C</sub> \_\_\_\_\_ 150mA  
 Power Dissipation \_\_\_\_\_ 150mW

### POWER DISSIPATION

Total Power Dissipation \_\_\_\_\_ 200mW

### ISOCOM COMPONENTS LTD

Unit 25B, Park View Road West,  
 Park View Industrial Estate, Brenda Road  
 Hartlepool, Cleveland, TS25 1YD  
 Tel: (01429) 863609 Fax : (01429) 863581


**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ )		1.2	1.4	V	$I_F = 10\text{mA}$
	Reverse Current ( $I_R$ )			10	$\mu\text{A}$	$V_R = 4\text{V}$
Output	Collector-emitter Breakdown ( $BV_{CEO}$ )	300			V	$I_C = 0.1\text{mA}$
	Emitter-collector Breakdown ( $BV_{ECO}$ )	0.1			V	$I_E = 10\mu\text{A}$
	Collector-emitter Dark Current ( $I_{CEO}$ )		10	200	nA	$V_{CE} = 200\text{V}$
Coupled	Current Transfer Ratio (CTR)	1000	4000	15000	%	$1\text{mA } I_F, 2\text{V } V_{CE}$
	Collector-emitter Saturation Voltage $V_{CE(SAT)}$			1.2	V	$20\text{mA } I_F, 100\text{mA } I_C$
	Input to Output Isolation Voltage $V_{ISO}$	5300			$V_{RMS}$	See note 1
	Input-output Isolation Resistance $R_{ISO}$	7500			$V_{PK}$	See note 1
		$5 \times 10^{10}$			$\Omega$	$V_{IO} = 500\text{V}$ (note 1)
	Input-output Capacitance	Cf		1	pF	$V = 0, f = 1\text{MHz}$
	Cut-off Frequency	fc		7	kHz	$V_{CE} = 2\text{V}, I_C = 20\text{mA}, R_L = 100\Omega, -3\text{dB}$
Output Rise Time	tr		100	$\mu\text{s}$	$V_{CE} = 2\text{V}, I_C = 20\text{mA}, R_L = 100\Omega$	
Output Fall Time	tf		20	$\mu\text{s}$		


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.


**FIGURE 1**

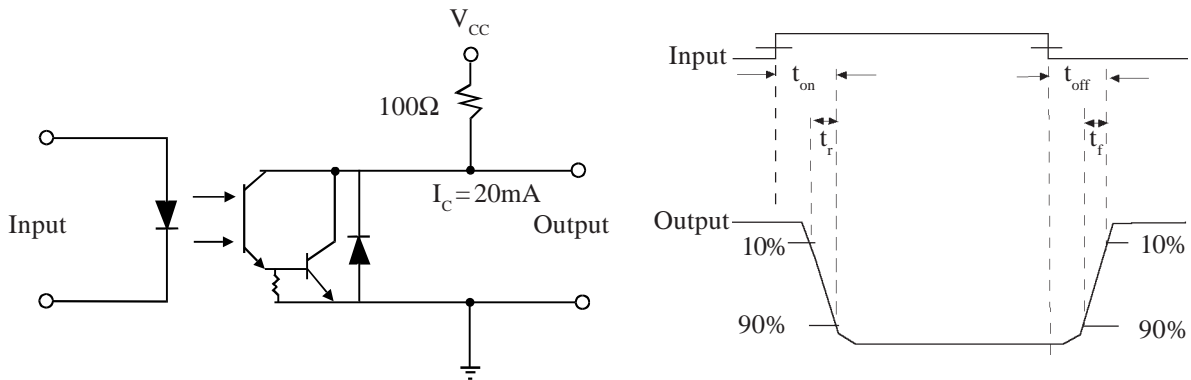


**Collector Power Dissipation vs. Ambient Temperature**

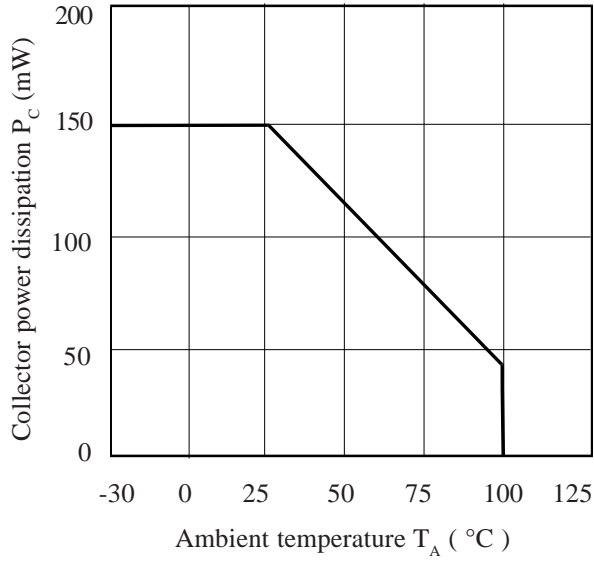


**Collector Current vs. Collector-emitter Voltage**

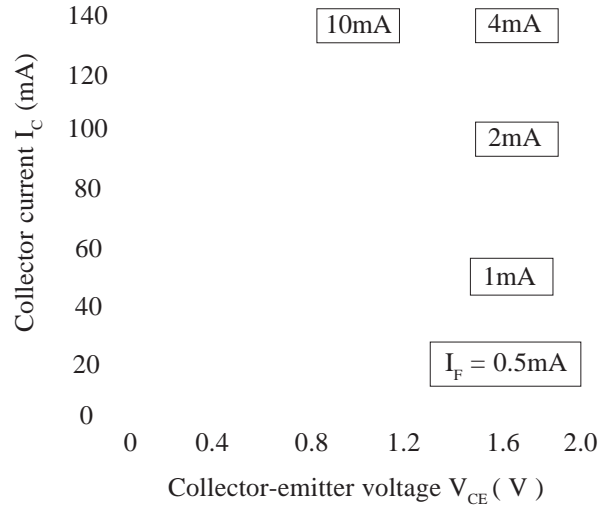


**Forward Current vs. Ambient Temperature**

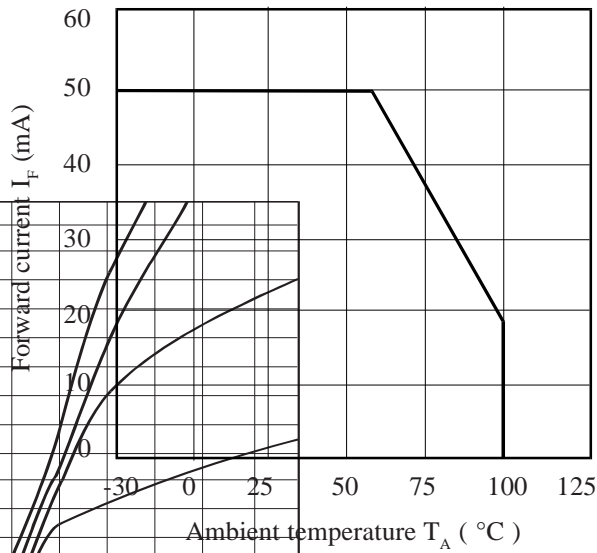

**Relative Current Transfer Ratio vs. Ambient Temperature**

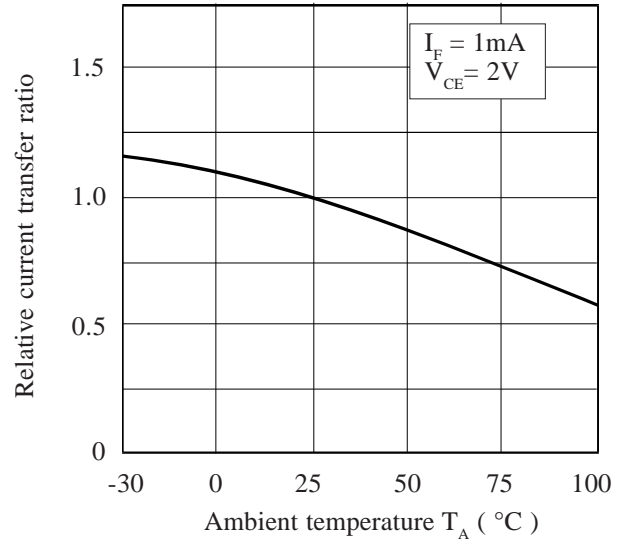

**Collector-emitter Saturation Voltage vs. Ambient Temperature**

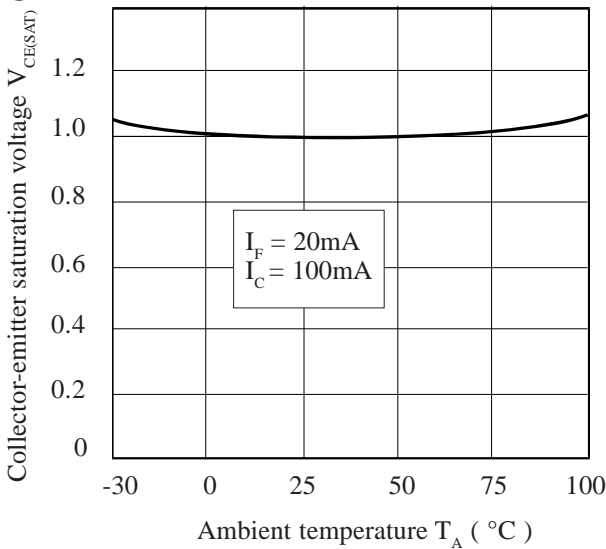

**Collector Dark Current vs. Ambient Temperature**

