

1. SPECIFICATION

Part No. : **MA208.A.AB.007**


Product Name : GPS/GALILEO and LTE/GSM/UMTS
(2G/3G/4G 700Mhz to 960MHz/1710MHz to 2200MHz) Combination Antenna

Description : Adhesive Mount IP67 Antenna
GPS/GALILEO: 3M RG-174 Fakra Code C

Blue

Cellular: 3M CFD-200 Fakra Code D Violet
1.8~5.5V/30dB
200.5*66.5*9mm

RoHS Compliant

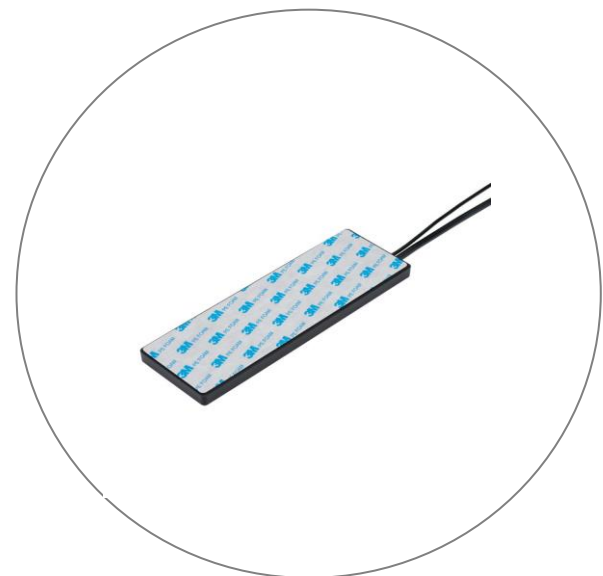

2. Introduction


The Stream MA.208 GPS/GALILEO/LTE Cellular antenna is a low profile, heavy-duty, fully IP67 waterproof external M2M antenna for use by RF professionals in telematics, transportation and remote monitoring applications. The Stream is unique in the market as it combines the highest possible efficiency and peak gain for GPS/GALILEO and all cellular bands in 4G/3G/2G in a low profile compact format for mounting via high quality first tier automotive approved 3M adhesive foam.

The patent pending design incorporates internally a custom Taoglas 35mm patch antenna on an extended integral ground-plane to deliver more than 3.5dBiC gain. A front-end SAW filter dramatically reduces radiated spurious emissions. The extended ground-plane used with an innovative internal cellular PIFA also enables the unique wide-band 4G/3G/2G response to deliver the highest performance possible, at 3 meters cable length. Nothing else out there comes close in terms of consistency of efficiency and peak gain at all cellular bands, with an awesome 70%+ at the LTE 700MHz band, again including 3 meters of cable loss. High antenna efficiencies are absolutely critical in today's 4G and 2G systems to achieving targeted data-speeds and coverage.

All this is done while still maintaining 20dB isolation between antennas. The Stream uses high-shielded PTFE dielectric ultra low-loss cables that maintain low attenuation at all frequency bands, and high noise rejection, with an average loss of only 0.3dB per meter (0.1dB per foot), compared to 0.7dB for RG58 and 1.2dB for RG174. Because of this, the Stream maximizes chances of passing PTCRB and network approvals first time. The Stream works best when attached to plastic or glass, but can also be used on metal if some foam spacing is added.

2.1. System Configuration

This antenna specification covers the LTE/GSM/UMTS Full band for 700MHz~960MHz 1710MHz~2170MHz and GPS (L1 Band).

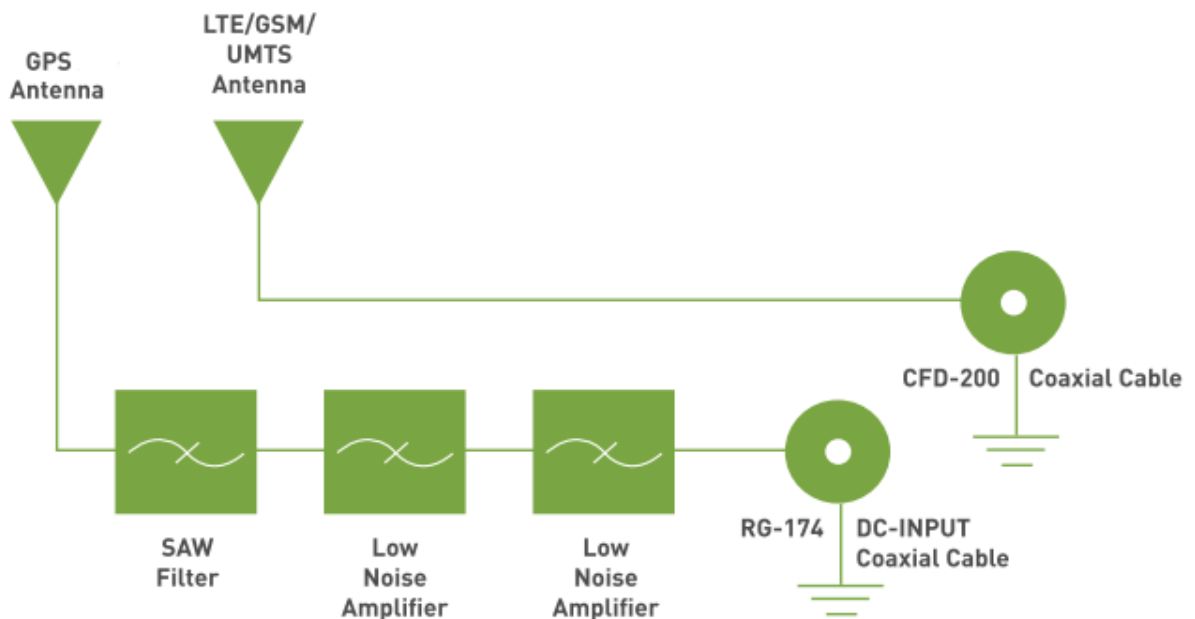

3. Antenna Specification

Performance Specifications		
Items	GPS/GALILEO Antenna	Cellular Antenna
Features	High performance GPS/GALILEO 35*35*4mm ceramic patch antenna with two stage high gain LNA 1575.42 +/- 1.023MHz	LTE – 700MHz
		CDMA: 824-896 MHz
		GSM: 880-960 MHz
		DCS: 1710-1880 MHz
		PCS: 1850-1990 MHz
		3G: 1920-2170MHz
Gain	3.5dBic typ @ Zenith	Average: - -3.03dBi at 700– 960MHz
		-4.34dBi at 1710 – 2170MHz
		Peak: 2.16dBi at 700 – 960MHz
		0.42dBi at 1710 – 2170MHz
Polarization	RHCP	Linear
VSWR		3.3 Max. at 700- 960MHz 3.6 Max. at 1710- 1850MHz 2.2 Max. at 1880-2170MHz
Impedance	50Ω	50Ω
Efficiency		≥68% @ 700MHz, ≥72% @ 750MHz, ≥66% @ 824MHz, ≥56% @ 890MHz, ≥61% @ 880MHz, ≥53% @ 960MHz, ≥37% @1710MHz, ≥51% @1880MHz, ≥55% @1990MHz, ≥54% @2110MHz, ≥45% @2170MHz

MECHANICAL		
Cable / Connector	3m RG-174 Cable Fakra Code C Blue connector Fully Customizable	CFD-200 with Fakra Code D Violet Fully customizable
Housing	UV resistant PVC	
Adhesive Mount	3M 1600TB(196.57*62.57*1.25mm)	
Protection Class	IP-67	
Operation Temperature	-40°C to +85°C	
Storage Temperature	-40°C to +85°C	
Relative Humidity	20% to 95%	
Weight per unit	0.18kg	


***note: specifications may be subject to change**

LTE BANDS			
Band Number	LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA		
	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✗
8	UL: 880 to 915	DL: 925 to 960	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✓
12	UL: 699 to 716	DL: 729 to 746	✓
13	UL: 777 to 787	DL: 746 to 756	✓
14	UL: 788 to 798	DL: 758 to 768	✓
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓
18	UL: 815 to 830	DL: 860 to 875 (LET only)	✓
19	UL: 830 to 845	DL: 875 to 890	✓
20	UL: 832 to 862	DL: 791 to 821	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✓
22	UL: 3410 to 3490	DL: 3510 to 3590	✗
23	UL: 2000 to 2020	DL: 2180 to 2200 (LTE only)	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✓
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓
29	UL: -	DL: 717 to 728 (LTE only)	✓
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✗
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	✗
32	UL: -	DL: 1452 - 1496	✓
35		1850 to 1910	✓
38		2570 to 2620	✗
39		1880 to 1920	✓
40		2300 to 2400	✓
41		2496 to 2690	✗
42		3400 to 3600	✗
43		3600 to 3800	✗

*Covered bands represent an efficiency greater than 20%


Antenna Characteristics

3.1. VSWR

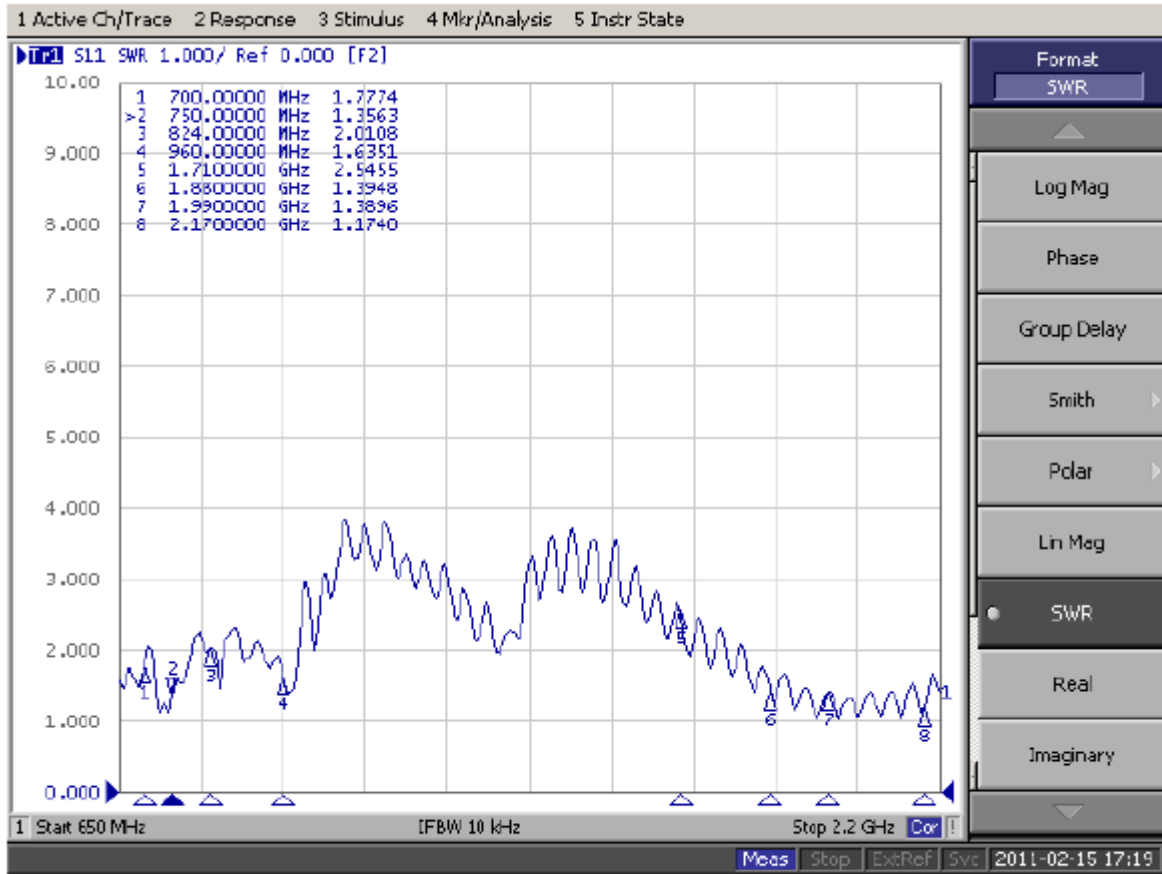


GSM/ UMTS Band VSWR (with length 3 meter CFD-200 Cable)

3.2. Efficiency

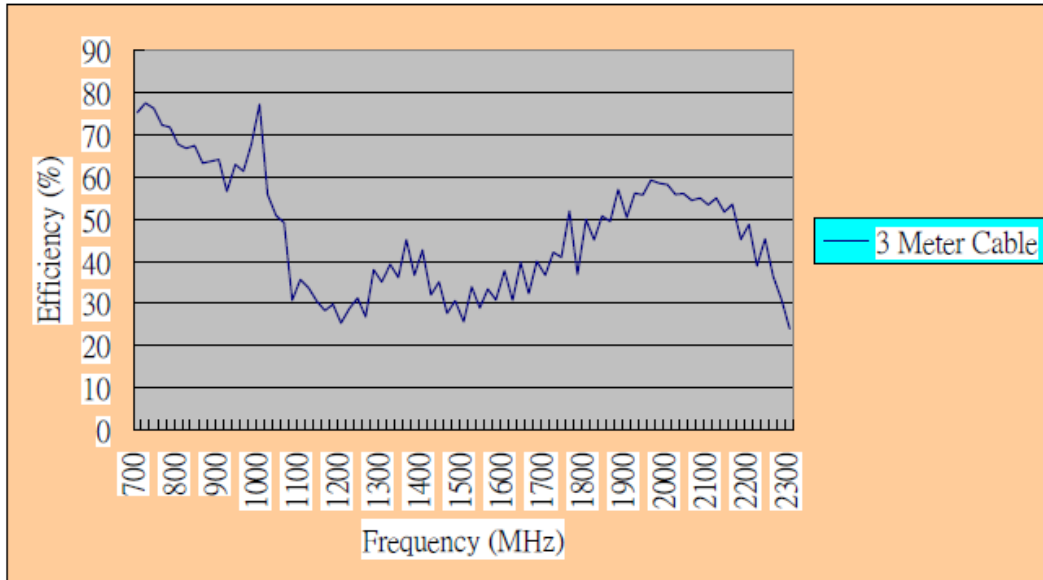


GSM/ UMTS Band Efficiency (with length 3 meter CFD-200 Cable)

3.3. Average Gain

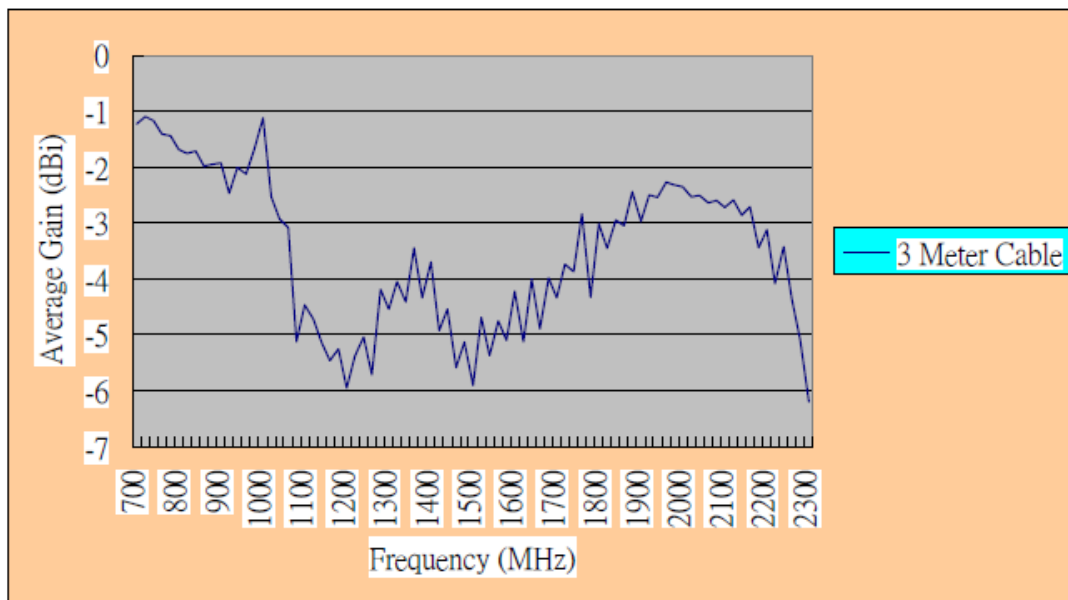


GSM/ UMTS Average Gain (with length 3 meter CFD-200 Cable)

3.4. Peak Gain

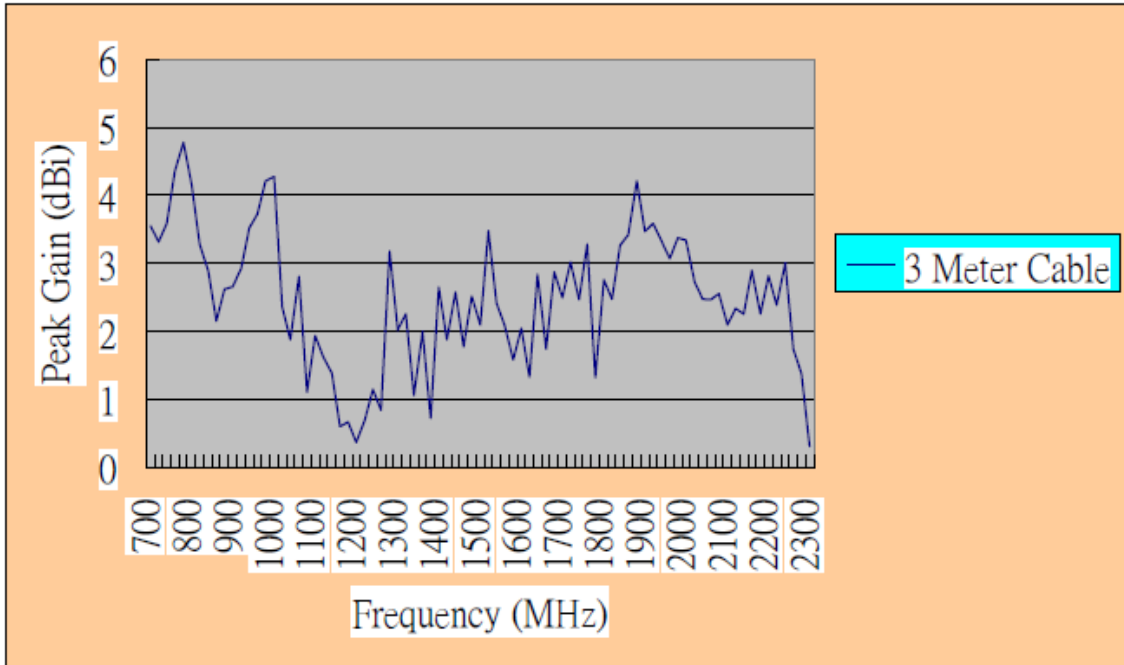


GSM/ UMTS Peak Gain (with length 3 meter CFD-200 Cable)

3.5. Axial Ratio

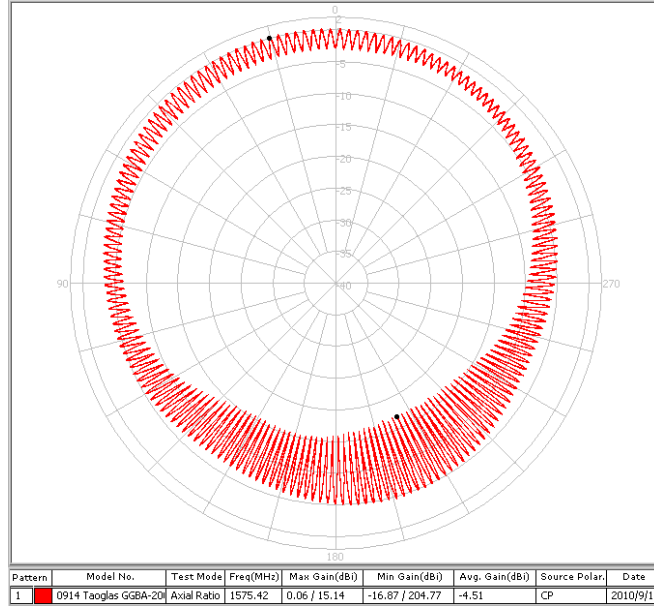


With IPEX Cable

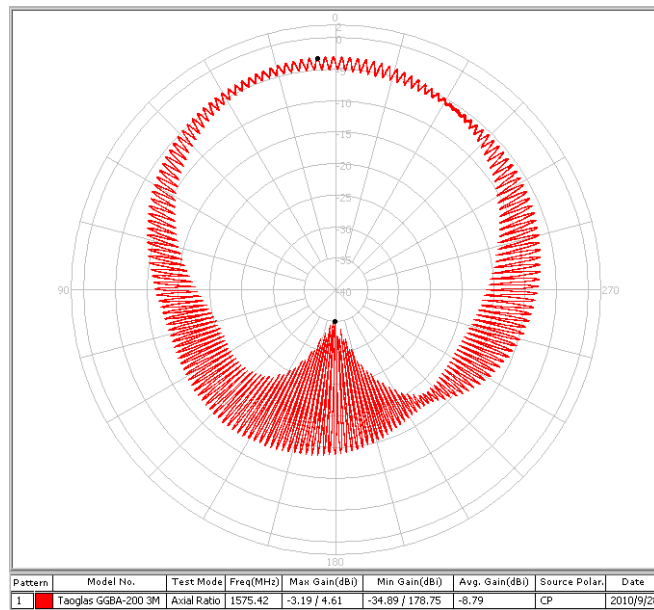


3M CFD-200 Cable

3.6. Radiation Patterns


XY Plane

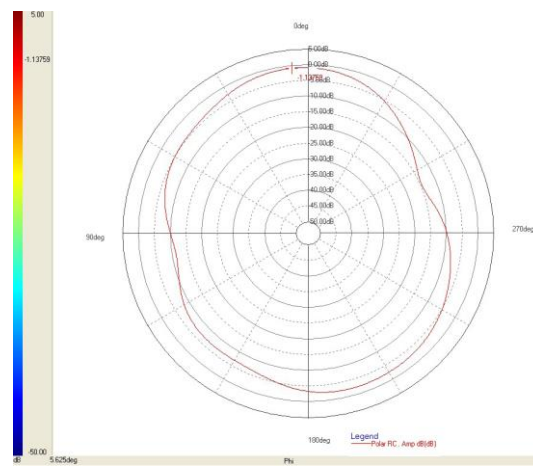

XZ Plane

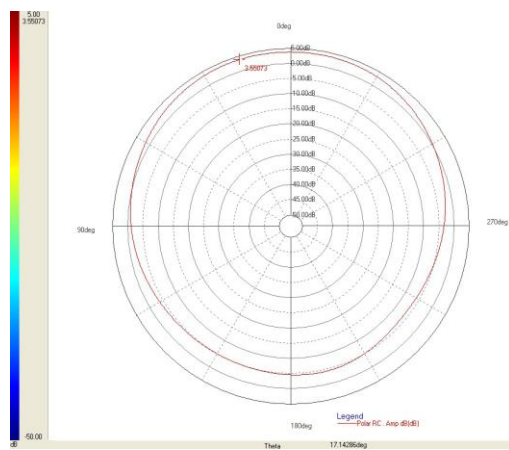

YZ Plane

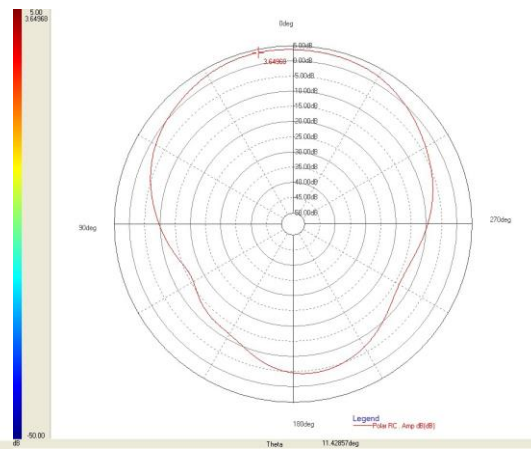


3.7. LNA

Frequency Range	1575.42+/-1.023Mhz
Output Impedance	50 Ohm
Output Power at 1dB Compression Point	-35dBm typ.
Output VSWR	2.0 Max.

Supply Voltage	Gain(Typ)	Noise Figure(Typ)	Power Consumption (Typ.)
1.8V	27.0dB	2.2dB	5.5mA
3.0V	32.9dB	2.3dB	12.5mA
5.5V	33.8dB	2.5dB	15.0mA

3.8. LNA Noise Figure at 3.0V

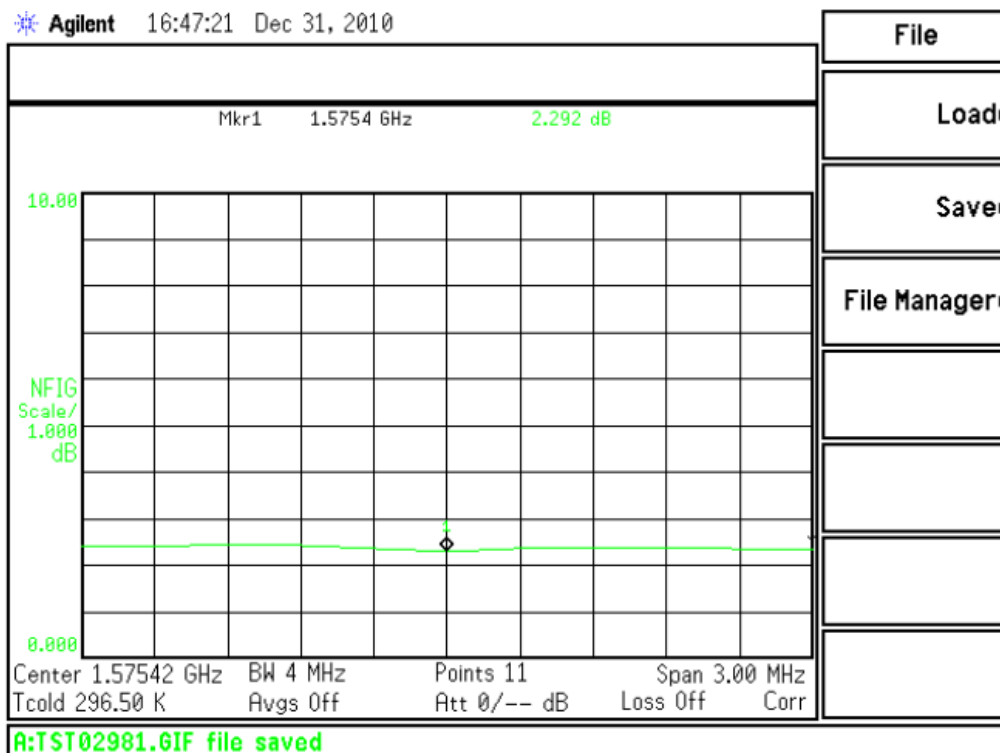


3.9. LNA Gain and Output of VSWR at 3.0V




3.10. GPS/GALILEO Antenna Specifications (Through Antenna, LNA and Cable Assembly)

Frequency Range	1575.42+/-1.023Mhz
Gain at 3.0V	32.5dBic @ Zenith
Output Impedance	50 Ohm
Output VSWR	2.0 Max.


3.11. 20dB min isolation to GPS/GALILEO LNA input and LTE/ GSM/ UMTS ANTENNA

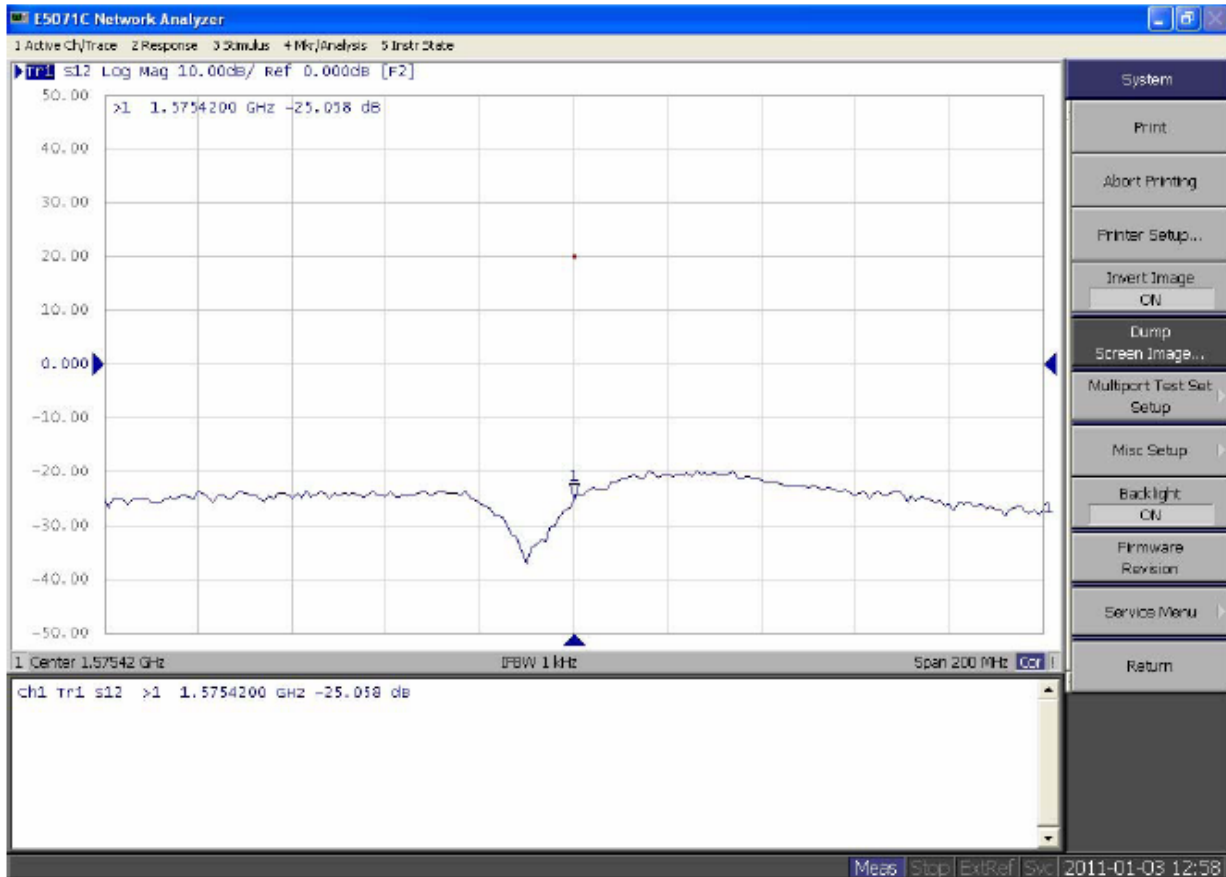


4. Drawing

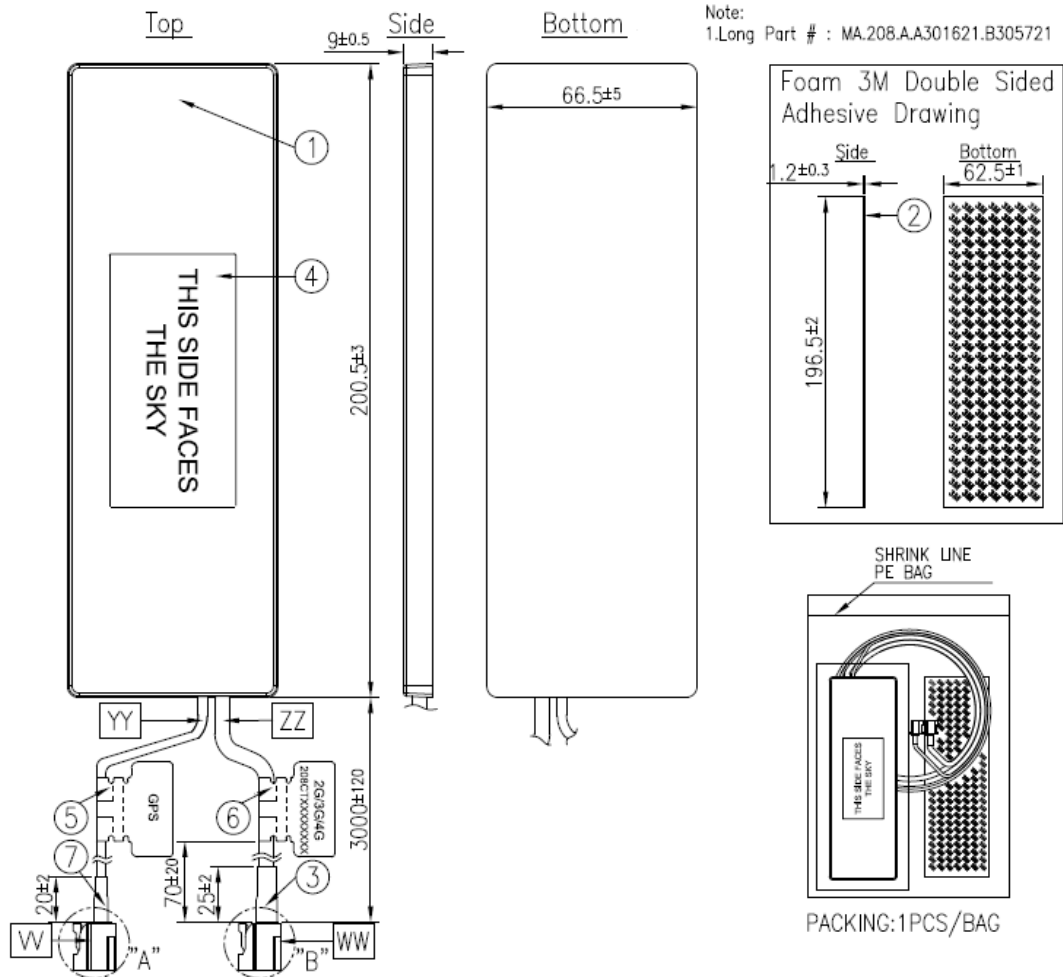

FAKRA C




FAKRA D



Name	P/N	Material	Finish	QTY
1 Housing	00011N30007A	ABS	Black	1
2 3M Double Adhesive Foam	00101S030000A	JM 1600TB	Blue Liner	1
3 Heat Shrink Tube	001315C030000A	PE	Black	1
4 Clear Label	001011N040007A	Coated Paper	Black	1
5 GPS Label	001011F000007A	PEPA	Orange	1
6 2G/3G/4G Label	001014A000007A	PEPA	White	1
7 Heat Shrink Tube	001315C020000A	PE	Black	1



Name	P/N	Spec	Finish	QTY
W Connector Type	202313N000007A	FAKRA C	Blue	1
WW Connector Type	202413N000007A	FAKRA D	Violet	1
YY Cable Type	301315C000000A	RG174	Black	1
ZZ Cable Type	301415C010000A	DFD 200	Black	1

4.1. Separate Adhesive Pad



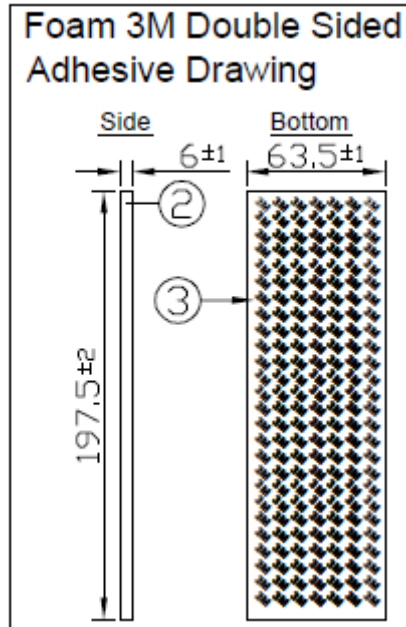




5. Packaging

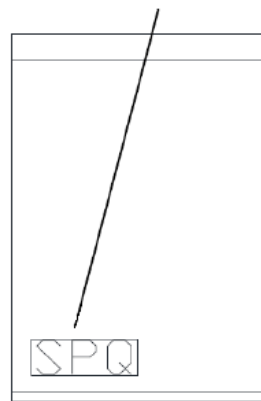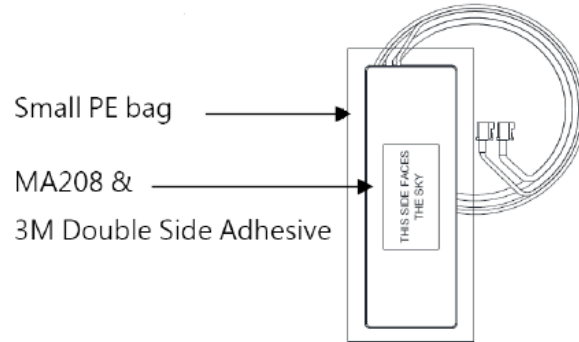

1PCS per big PE bag

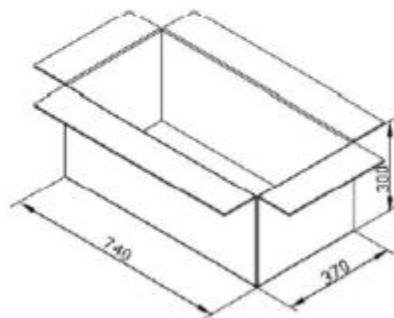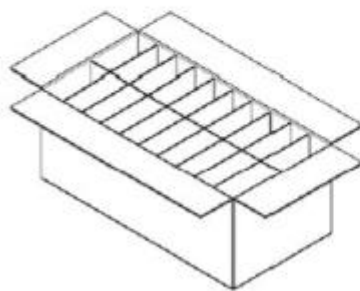



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.