

**Micro Commercial Components** 



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939


## Features

- Lead Free Finish/RoHS Compliant (NOTE 1)("P" Suffix designates RoHS Compliant. See ordering information)
- Soft Reverse Recovery Characteristics
- Ultrafast Reverse Recovery Time
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package

## **Applications**


- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Power Factor Correction (PFC) Circuit
- Converter & Chopper



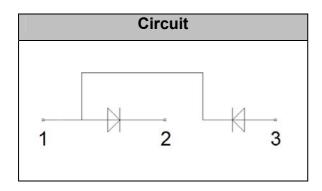

## MF100C06F1

## 100 Amp FRED Modules 600 Volts

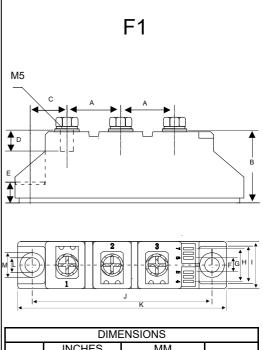

DIMENSIONS					
DIM	INCHES		MM		NOTE
DIN	MIN	MAX	MIN	MAX	NOTE
Α	0.768	0.807	19.50	20.50	
В	1.161	1.201	29.50	30.50	
С	0.591	0.630	15.00	16.00	
D	0.335	0.374	8.50	9.50	
E	0.315	0.354	8.00	9.00	
F	0.217	0.256	5.50	6.50	
G	0.531	0.571	13.50	14.50	
Н	0.650	0.689	16.50	17.50	
-	0.807	0.846	20.50	21.50	
J	3.130	3.169	79.50	80.50	
K	3.642	3.681	92.50	93.50	
L	0.236	0.276	6.00	7.00	Ø
М	0.413	0.453	10.50	11.50	

www.mccsemi.com



## Maximum Ratings

Symbol	Conditions	Values	Units
V <sub>R</sub>		600	V
V <sub>RRM</sub>		600	V
	T <sub>C</sub> =90°C, Per Diode	100	А
I <sub>F(AV)</sub>	T <sub>C</sub> =90°C, 20KHz, Per Module	150	А
I <sub>F(RMS)</sub>	T <sub>C</sub> =95°C, Per Diode	150	А
	1/2 Cycle , 50Hz, Sine	1300	А
I <sub>FSM</sub>	1/2 Cycle , 60Hz, Sine	1500	А
l <sup>2</sup> t —	T <sub>J</sub> =45°C, t=10ms, 50Hz, Sine	8450	A <sup>2</sup> s
	T <sub>J</sub> =45°C, t=8.3ms, 60Hz, Sine	11250	A <sup>2</sup> s
PD		280	W
Visol	AC, Ton=1min	3000	V
TJ		-40 to +150	°C
T <sub>STG</sub>		-40 to +125	°C
Torque	Recommended (M5)	3±15%	N∙m
Torque	Recommended (M5)	3±15%	N∙m
Weight		100	g

#### **Thermal Characteristics**

Symbol	Conditions	Values	Units
Rth(j-c)	Per diode	0.4	°C/W

### **Electrical Characteristics**

Symbol	Conditions	Values			Units
Symbol	Conditions		Тур.	Max.	Units
	V <sub>R</sub> =600V			50	uA
I <sub>RM</sub>	V <sub>R</sub> =600V, T <sub>J</sub> =125°C			1	mA
V	I <sub>F</sub> =100A		1.25	1.4	V
V <sub>F</sub>	I <sub>F</sub> =100A, T <sub>J</sub> =125°C		1.1	1	V
trr	I <sub>F</sub> =1A, V <sub>R</sub> =30V, di <sub>F</sub> /dt=-200A/µs		45	50	ns
trr	V <sub>R</sub> =300V, I <sub>F</sub> =100A, di <sub>F</sub> /dt=-200A/µs, T <sub>J</sub> =25°C		105		ns
I <sub>RRM</sub>	$v_{R}$ = 500 $v_{1}$ I <sub>F</sub> = 100A, u <sub>F</sub> /u <sub>L</sub> = 200A/µS, 1 <sub>J</sub> = 25 C		10		А
trr	V <sub>R</sub> =300V, I <sub>F</sub> =100A, di <sub>F</sub> /dt=-200A/µs, T <sub>J</sub> =125°C		200		ns
I <sub>RRM</sub>			18		А

# • www.mccsemi.com •



**Micro Commercial Components** 

#### **Performance Curves**

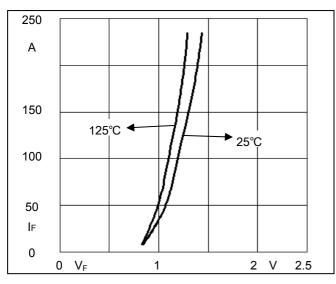


Fig1. Forward Voltage Drop vs Forward Current

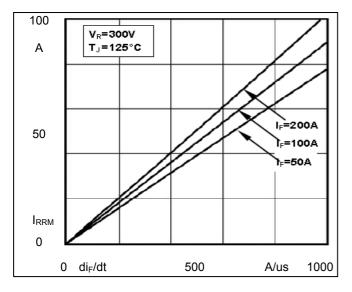


Fig3. Reverse Recovery Current vs di<sub>F</sub>/dt

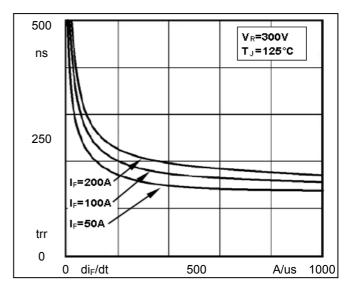


Fig2. Reverse Recovery Time vs di<sub>F</sub>/dt

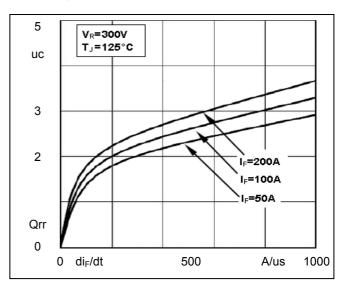


Fig4. Reverse Recovery Charge vs di<sub>F</sub>/dt

# - www.mccsemi.com



### **Ordering Information :**

Device	Packing
Part Number-BP	Bulk: 10PCS/BOX ;100PCS/CTN

#### **\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

# www.mccsemi.com