

NA860 NEW

2U Rackmount Network Appliance Platform with Dual LGA3647 Socket Intel® Skylake Server Processors, Intel® C621 (Purley) and up to 66 LANs

Features

- Dual LGA3647 socket Intel® Skylake server processors
- Twelve DDR4-2400 R-DIMM, up to 384GB
- Max. up to sixty-six 10/100/1000 Mbps Ethernet ports
- Eight expandable LAN modules supporting 1GbE/10GbE/Fiber/Copper/Bypass
- Supports 2U redundant power supply
- Supports IPMI/TPM (onboard) for optional
- High computing power for SDN, NGFW, IDS, IPS and UTM applications




Specifications

System	
CPU	Dual LGA3647 socket Intel® Skylake server processors
Chipset	Intel® C621
Memory	12 x DDR4-2400 R-DIMM, up to 384GB non-buffer non-ECC/ECC memory
BIOS	AMI SPI Flash BIOS
Storage	2 x 2.5" SATA HDD hot swappable 1 x mSATA 1 x 3.5" SATA HDD (optional)
Network Interface	2 x 10/100/1000 Mbps Ethernet (Intel® i210) Single CPU: 4 x LAN module (optional), max. up to 34 LAN ports Dual CPU: 8 x LAN module (optional), max. up to 66 LAN ports
I/O Interface	1 x RS-232 (RJ-type) 2 x USB 3.0 2 x RJ-45 1 x VGA
Other Features	LAN Bypass function through latch relay (depends on LAN modules)
Expansion slot	1 x PCIe x16 (optional)
Watchdog Timer	255 stepping for system reset 8 stepping for LAN Bypass
Power Supply	800 W 2U redundant power supply
OS Compatibility	Linux Kernel

Mechanical/ Environmental

Form Factor	2U rackmount
LED	Power, HDD, GPIO programmable, LAN Bypass, Link/Act with transfer rate
Operating Temp.	0°C ~ +40°C (+32°F ~ +104°F)
Humidity	10% ~ 95% RH, non-condensing
Chassis Material	Steel
Dimensions	88 mm (3.46") (H) x 430 mm (16.92") (W) x 600 mm (23.65") (D)
Weight (net/gross)	8.32 kg (18.34 lb)/12.76 kg (28.13 lb)
Certificates	FCC class A/CE class A

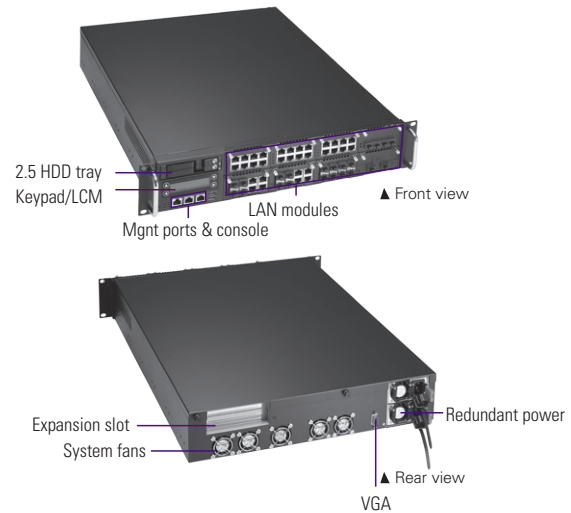

Ordering Information

Standard

NA860-R2GI-RC-US (P/N: E26E8601XX)	2U rackmount appliance with dual Intel® Skylake server processors with 2 GbE LANs and 8 NIC LAN modules supported
------------------------------------	---

Optional

5916E552000E	DB9F-RJ-45 1.8M console cable for Cisco
--------------	---

* Specifications and certifications may vary contingent on options.

Packing List

- 1 x SATA cable
- 1 x Power cord

Dimensions

