

Shock-Safe Fuseholder, 6.3 x 32 mm, Fingerrip, Rear-Side, NF



250 VAC · 2.5W/10A (NF)10A (UL/CSA)



### Description

- Screw type fuse carrier

### Standards

- UL 4248-1 / UL 512
- CSA C22.2 no. 39
- NF C 93-436 - Modell HB02
- Contrôle de Conformité de Qualité (CCQ)

### Approvals

- UL File Number: E41738
- CSA File Number: 23151

### Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

### Technical Data

|                              |  |
|------------------------------|--|
| Fuse-Link                    | 6.3 x 32mm   |
| Mounting                     | Panel Mount, Rear Side   |
| Attachment                   | Fixing Nut   |
| Terminal                     | Solder   |
| Rated Voltage                | 250 VAC  |
| Rated current                | 10A (NF), 10A (UL/CSA)   |
| Rated Power Acceptance IEC   | 2.5W / 10A @ Ta 23 °C<br>Admissible power acceptance at higher ambient temperature see derating curves |
| Degree of Protection         | IP 40 / IP 67  |
| Protection Class             | Suitable for appliances with protection class I or II acc. to IEC 61140                                |
| Admissible Ambient Air Temp. | -40 °C to 85 °C  |
| Climatic Category            | 40/085/21 acc. to IEC 60068-1  |
| Material: Socket             | Thermoset, black   |
| Unit Weight                  | 19 g   |
| Storage Conditions           | 0 °C to 60 °C, max. 70% r.h.   |
| Product Marking              | Type, Rated Voltage, Rated current, Approvals, HB2   |

|                                 |  |
|---------------------------------|--|
| Soldering Methods               | Iron<br><a href="#">Soldering Profile</a>    |
| Contact Resistance              | < mΩ at 20 mV                                |
| Resistance to Vibration         | acc. to NF C 20-706 / IEC 60068-2-6, test Fc |
| Shocks                          | acc. to NF C 20-706 / IEC 60068-2-27         |
| Bumps                           | acc. to NF C 20-729 / IEC 60068-2-29         |
| Salt Mist                       | acc. to NF C 20-711 / IEC 60068-2-11         |
| Dump Heat                       | acc. to NF C 20-604                          |
| Climatic Composite              | acc. to NF C 20-619 Phases D and F           |
| Admissible Torque on Fixing Nut | max 1.2 Nm                                   |
| Plattendicke                    | max 5 mm                                     |

### Dimension

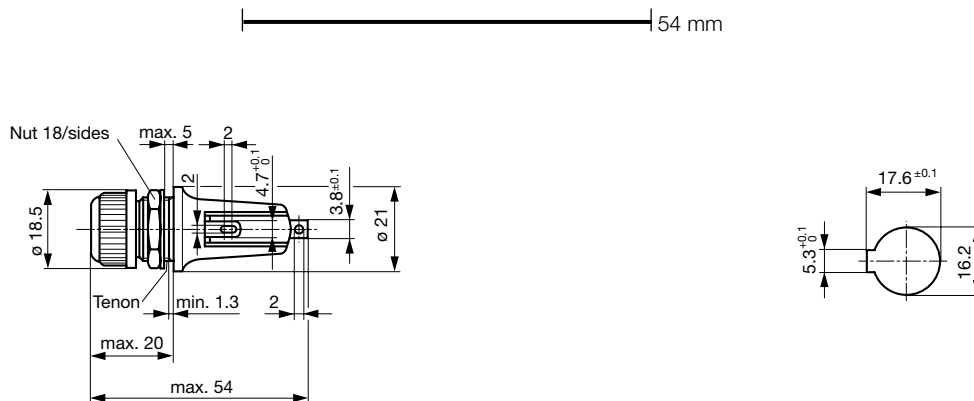

Mounting holes

## All Variants

| Holder | Cap        | Fuse-Link  | Degree of Protection | NF | RU | SF | GAM T1 | NNO | Reference  | Order Number |
|--------|------------|------------|----------------------|----|----|----|--------|-----|------------|--------------|
| •      | Fingergrip | 6.3 x 32mm | IP 40                | •  | •  | •  |        |     | 23312P     | 7092.2520    |
| •      | Fingergrip | 6.3 x 32mm | IP 67                |    |    |    |        |     | 23312ERJJP | 7092.2630    |

Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

**Packaging Unit** Bulk (100 pcs.)