

isc P-Channel MOSFET Transistor

IPD068P03L3, IIPD068P03L3

• FEATURES

- Static drain-source on-resistance:
 $R_{ds(on)} \leq 6.8m\Omega$
- Enhancement mode:
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• DESCRIPTION



- 175° C operating junction temperature

• ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{DSS}	Drain-Source Voltage	-30	V
V _{GS}	Gate-Source Voltage	±20	V
I _D	Drain Current-Continuous	-70	A
I _{DM}	Drain Current-Single Pulsed	-280	A
P _D	Total Dissipation @T _c =25°C	100	W
T _j	Max. Operating Junction Temperature	175	°C
T _{stg}	Storage Temperature	-55~175	°C

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th(j-c)}	Channel-to-case thermal resistance	1.5	°C/W
R _{th(j-a)}	Channel-to-ambient thermal resistance	50	°C/W

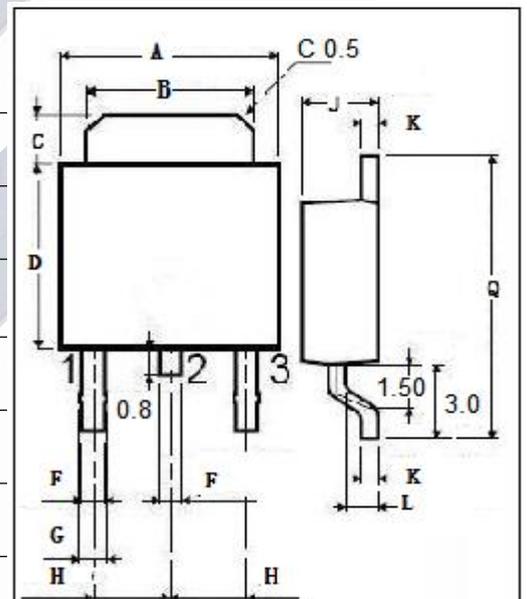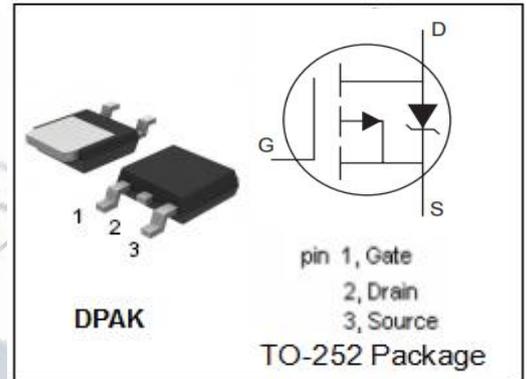

DIM	mm	
	MIN	MAX
A	6.40	6.60
B	5.20	5.40
C	1.15	1.35
D	5.70	6.10
F	0.65	
G	0.75	
H	2.10	2.50
J	2.10	2.40
K	0.40	0.60
L	0.90	1.10
Q	9.90	10.1

isc P-Channel MOSFET Transistor
IPD068P03L3, IIPD068P03L3
ELECTRICAL CHARACTERISTICS

 T_C=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V; I _D = -0.25mA	-30			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} ; I _D = -0.15mA	-1.0		-2.0	V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} = -10V; I _D = -70A			6.8	mΩ
I _{GSS}	Gate-Source Leakage Current	V _{GS} = -20V; V _{DS} = 0V			-0.1	μA
I _{DSS}	Drain-Source Leakage Current	V _{DS} = -30V; V _{GS} = 0V			-1	μA
V _{SD}	Diode forward voltage	I _F = -70A, V _{GS} = 0V			-1.2	V