

# Isc N-Channel MOSFET Transistor

# STP90NF03L

**• FEATURES**

- Typical  $R_{DS(on)}=0.0056 \Omega$
- Conduction losses reduced
- Switching losses reduced
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

**• APPLICATIONS**



- Switching application

**• ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ C$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{DSS}$	Drain-Source Voltage	30	V
$V_{GSS}$	Gate-Source Voltage	$\pm 20$	V
$I_D$	Drain Current-Continuous@ $T_c=25^\circ C$ $T_c=100^\circ C$	90 65	A
$I_{DM}$	Drain Current-Single Pulsed	360	A
$P_D$	Total Dissipation	150	W
$T_j$	Max. Operating Junction Temperature	175	$^\circ C$
$T_{stg}$	Storage Temperature	-65~175	$^\circ C$

**• THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	1	$^\circ C/W$
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	62.5	$^\circ C/W$

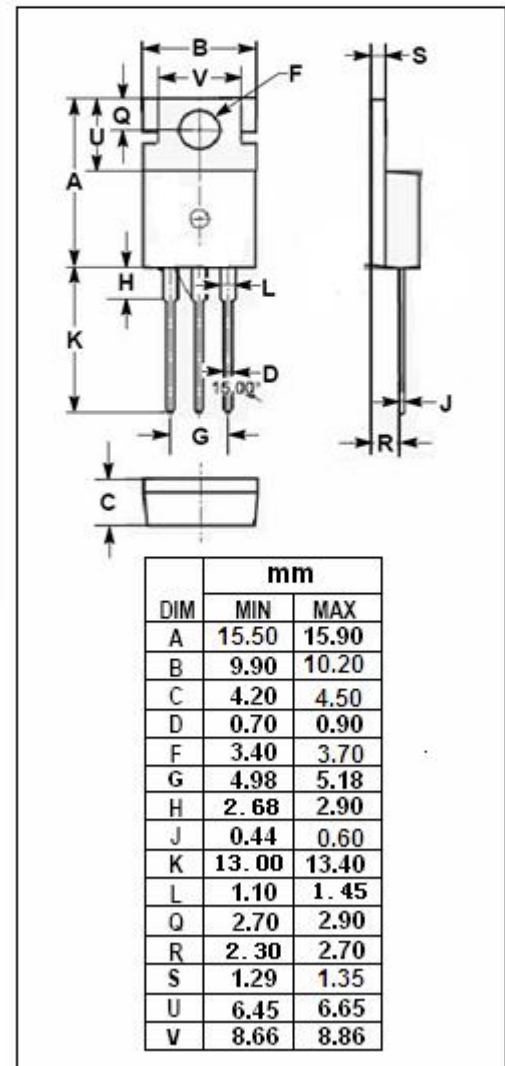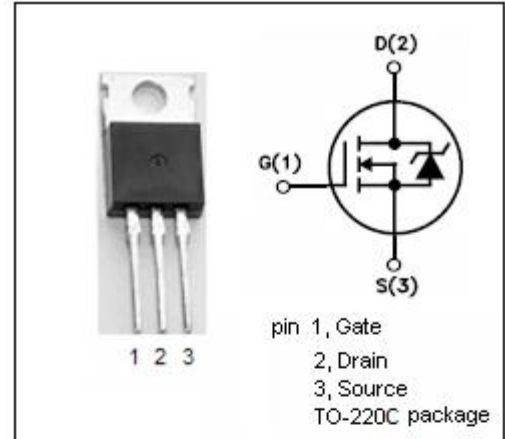

**Isc N-Channel MOSFET Transistor**

**STP90NF03L**

**ELECTRICAL CHARACTERISTICS**

T<sub>C</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V; I <sub>D</sub> = 0.25mA	30			V
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =±20V; I <sub>D</sub> =0.25mA	1		2.5	V
R <sub>DS(on)</sub>	Drain-Source On-Resistance	V <sub>GS</sub> = 10V; I <sub>D</sub> =45A V <sub>GS</sub> = 5V; I <sub>D</sub> =45A		5.6 7.0	6.5 12	mΩ
I <sub>GSS</sub>	Gate-Source Leakage Current	V <sub>GS</sub> = ±20V; V <sub>DS</sub> = 0V			±0.1	μA
I <sub>DSS</sub>	Drain-Source Leakage Current	V <sub>DS</sub> = 30V; V <sub>GS</sub> = 0V; T <sub>J</sub> =25°C T <sub>J</sub> =125°C			1 10	μA
V <sub>SDF</sub>	Diode forward voltage	I <sub>SD</sub> =90A, V <sub>GS</sub> = 0 V			1.3	V