

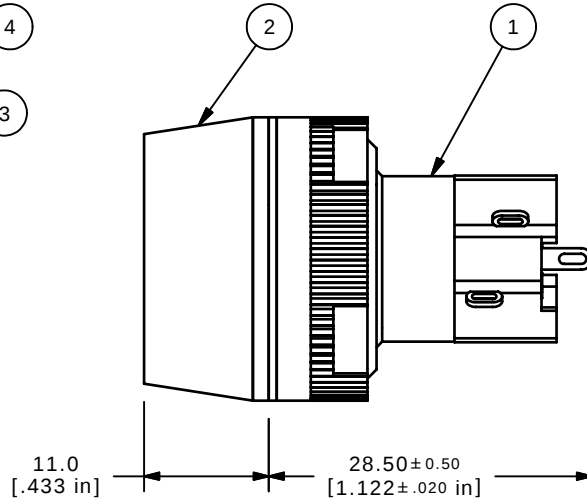
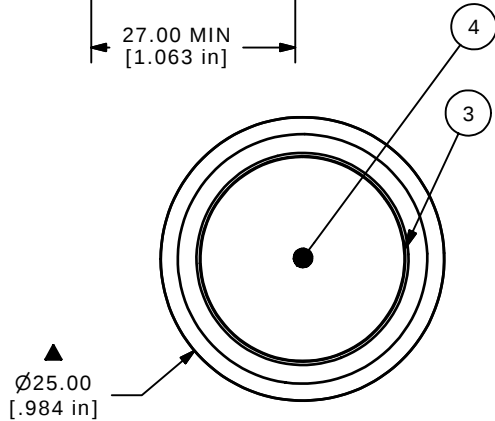

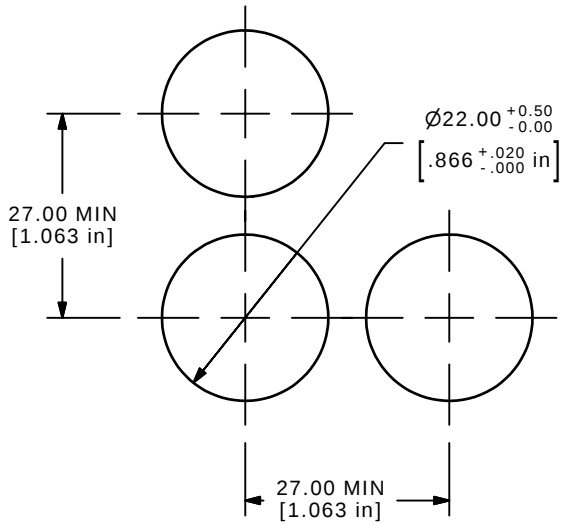


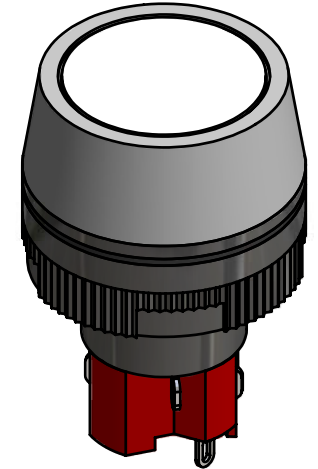

| Parts List |     |             |                         |
|------------|-----|-------------|-------------------------|
| ITEM       | QTY | PART NUMBER | DESCRIPTION             |
| 1          | 1   | F060606     | LASOAV11                |
| 2          | 1   | F051702     | 25MM RING FOR LA SERIES |
| 3          | 1   | F060253     | 25MM WHITE LENS         |
| 4          | 1   | F050417     | 50-004-17 6VDC LED RED  |



ISOMETRIC

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5 AMPS @ 250VAC UL, VDE APPROVED  
6 AMPS @ 240VDC UL, VDE APPROVED
5. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES  
AT FULL LOAD.
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. OPERATING TEMP.: -25°C to 55°C
- ▲ 8. LAMP VOLTAGE: 6VDC LED
9. ▲ DENOTES CRITICAL PARAMETER.

|     |        |                          |          |    |
|-----|--------|--------------------------|----------|----|
| B   | 15544  | CHANGE FROM DPDT TO SPDT | 11/17/05 | PH |
| A   | 15408  | RELEASED FOR PRODUCTION  | 10/20/05 | PH |
| REV | PCR NO | DESCRIPTION              | DATE     | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

**E-SWITCH®**

TITLE LASOAV11HREDWHT

|       |            |    |         |     |
|-------|------------|----|---------|-----|
| SCALE | DATE       | DR | DWG     | REV |
| 1.5:1 | 10/20/2005 | PH | XF0650P | B   |