



1. Mechanical Dimensions:

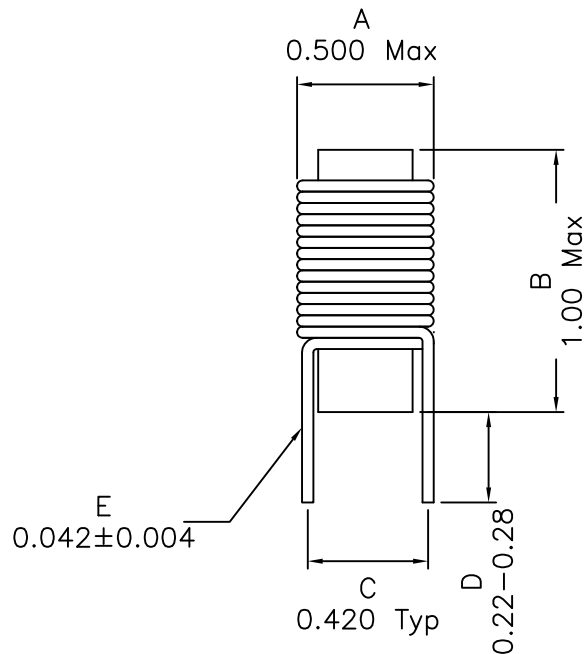

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 22uH ±10% @15.75KHz, 0.1V

DCR: 0.023 Ohms Max

Rated Current: 5.0A_{dc} (Based on 40°C Temp Rise)

Q: 5.0 Min @15.75KHz, 0.1V

DOC. REV: A/3

XFMRs Inc	Title: POWER CHOKES		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A	P/N: XFRLVO-220K	REV. A
Dimensions in INCH	DWN.	Yuan	Jun-25-14
	CHK.	YK Liao	Jun-25-14
SHEET 1 OF 1	APP.	DDC	Jun-25-14