



# DF15005S thru DF1510S

Miniature Glass Passivated Single-Phase Surface Mount Bridge Rectifiers  
Reverse Voltage 50 to 1000 Volts    Forward Current 1.5 Amperes

## Features


- ◆ Ideal for printed circuit boards
- ◆ Applicable for automotive insertion
- ◆ High surge current capability
- ◆ Solder Dip 260 °C, 40 seconds



DFS

## Mechanical Data

- ◆ Case: DFS  
Epoxy meets UL-94V-0 Flammability rating
- ◆ Terminals: Matte tin plated (E3 Suffix) leads, solderable per J-STD-002B and JESD22-B102D
- ◆ Polarity: As marked on body

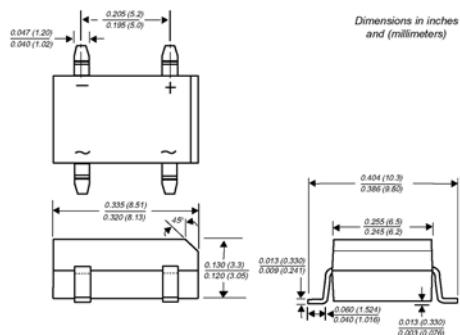

Dimensions in inches  
and (millimeters)

## Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for SMPS, Lighting Ballaster, Adapter, Battery Charger, Home Appliances, Office Equipment, and Telecommunication applications

## Maximum Ratings and Electrical Characteristics

( $T_A=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbols	DF 15005S	DF 1501S	DF 1502S	DF 1504S	DF 1506S	DF 1508S	DF 1510S	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum average forward output rectified current at $T_A=40^\circ\text{C}$ <sup>(2)</sup>	$I_{F(AV)}$	1.5						Amps	
Peak forward surge current single half sine-wave superimposed on rated load (JEDEC Method) $T_J=150^\circ\text{C}$	$I_{FSM}$	50.0						Amps	
Rating for fusing ( $t < 8.3\text{ms}$ )	$P_f t$	10						$\text{A}^2\text{sec}$	
Maximum instantaneous forward voltage drop per leg at 0.75A	$V_F$	1.1						Volts	
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage per leg $T_A=125^\circ\text{C}$	$I_R$	5.0 500						uA	
Typical junction capacitance per leg <sup>(1)</sup>	$C_J$	25						pF	
Typical thermal resistance per leg <sup>(2)</sup>	$R_{JJA}$ $R_{JUL}$	40 15						°C/W	
Operating junction and storage temperature range	$T_J$ , $T_{STG}$	-55 to +150						°C	

Notes: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

2. Units mounted on P.C.B. with 0.51 x 0.51" (13 x 13mm) copper pads

## RATINGS AND CHARACTERISTIC CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

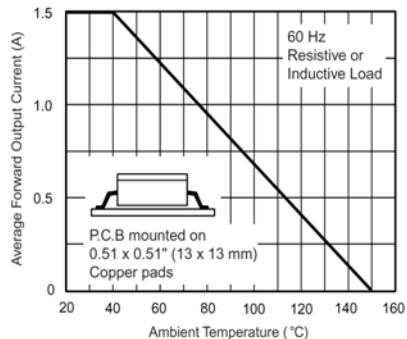


Figure 1. Derating Curve Output Rectified Current

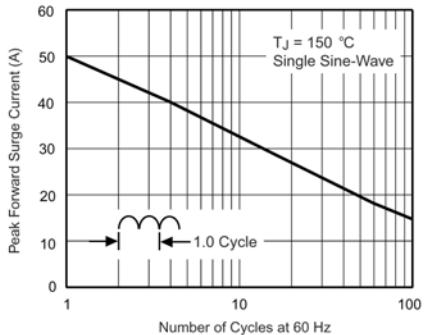


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

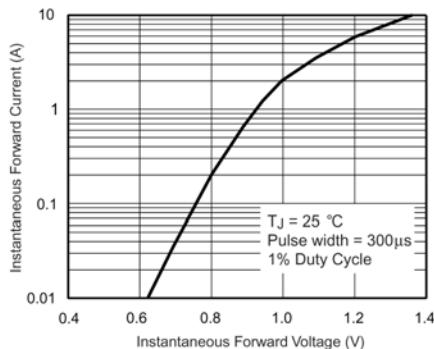


Figure 3. Typical Forward Characteristics Per Leg

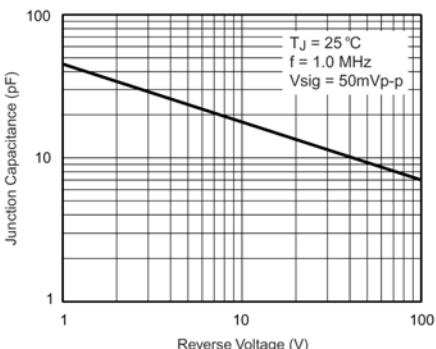


Figure 5. Typical Junction Capacitance Per Leg

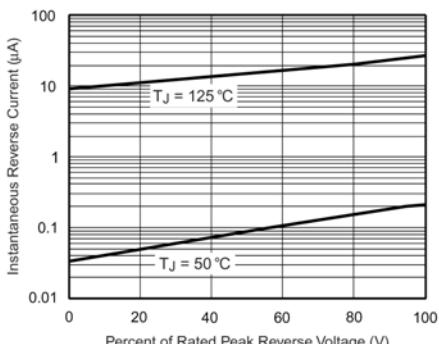


Figure 4. Typical Reverse Leakage Characteristics Per Leg

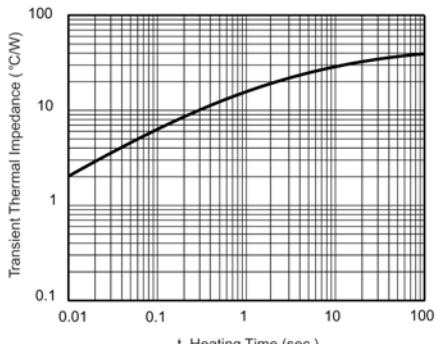


Figure 6. Typical Transient Thermal Impedance