


**4 / 5 Pin Mini ISO Automotive Relay Socket** **SC792**

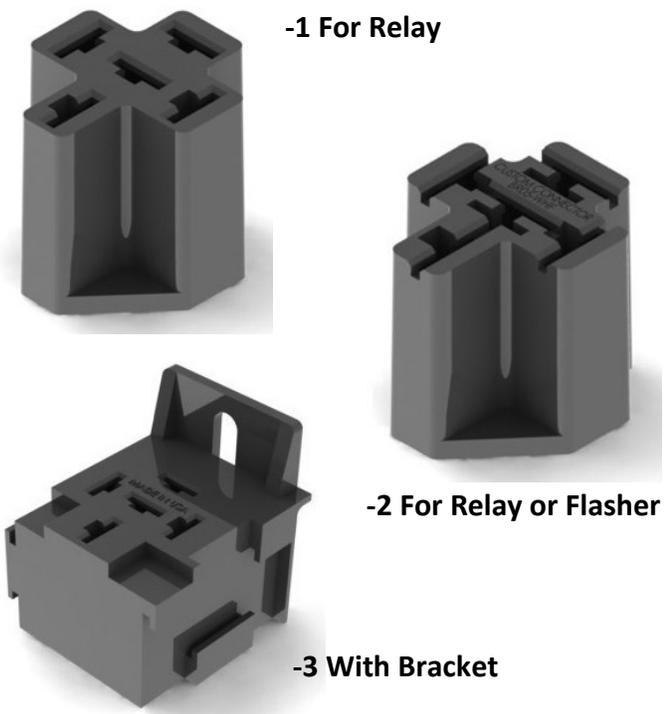

-1 For Relay

-2 For Relay or Flasher

-3 With Bracket

**FEATURES**

- Mini ISO Automotive Relay Socket
- Heat Stabilized Thermoplastic
- -40 to 140°C Operating Temperature
- For Use with Wire Harnessing
- Three Versions
  - 1 No Mounting Bracket for Relay
  - 2 No Mounting Bracket for Relay or Flasher
  - 3 With Mounting Bracket for Relay
- RoHS Compliant

**ORDERING INFORMATION**


Part Number	Description	Terminal	Form
SC792-1	5 Pin Connector without Mounting Bracket for Wire Harness	Crimp	1A, 1C
SC792-2	5 Pin Connector for Relay or Flasher without Mounting Bracket for Wire Harness	Crimp	1A, 1C
SC792-3	5 Pin Connector with Mounting Bracket for Wire Harness	Crimp	1A, 1C

**\*For use with PC792A, PC792C, PC792H both  
1 Form A (1A) and  
1 Form C (1C) Contact Forms**


Order From	Part Number	AWG	Blade
TE Connectivity	42100	14-18	1/4"
TE Connectivity	42281	14-18	1/4"
TE Connectivity	42904	12-16	1/4"
TE Connectivity	60249	12-16	1/4"
TE Connectivity	60253	12-14	1/4"

Picker Components references these terminals to be used with our \*Automotive Series Connectors. Current capability of the terminals depends on the gauge of wire used, the quality of the crimp, the addition of solder or a weld, operating conditions, temperature cycling, etc. Terminals to be purchased separately.




**DIMENSIONS (mm / inches)**

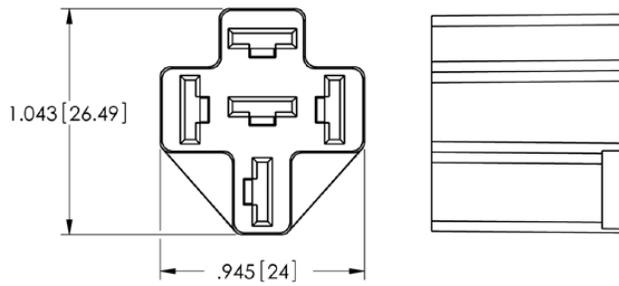


**SC792-1**

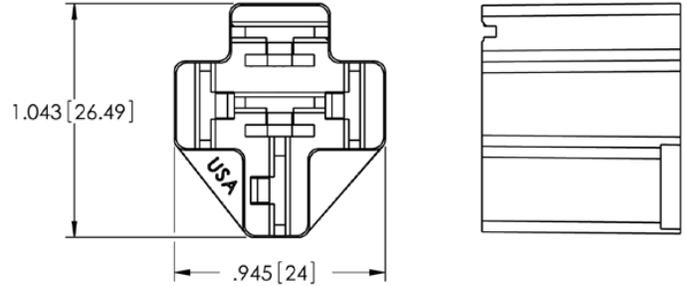

**SC792-2**

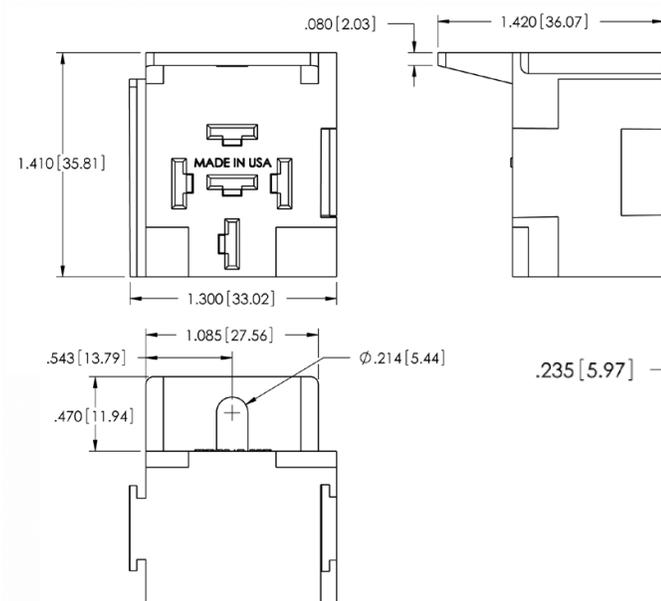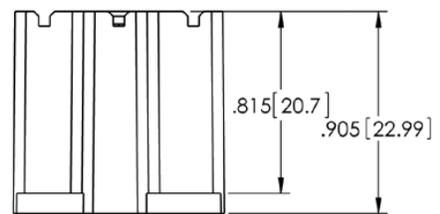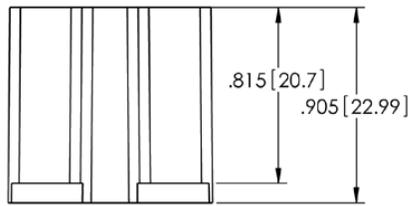

**SC792-3 With Mounting Tab**

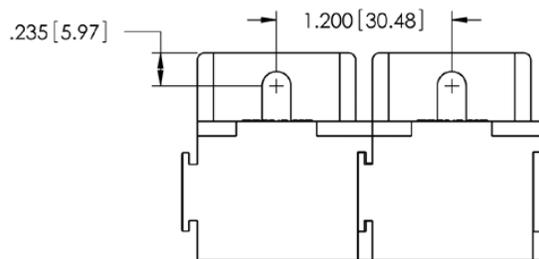

**SC792-3 are Stackable**

**NOTES:**

Dimensions are in mm, Inches are listed for reference only.



3220 Commander Drive, Suite 102 Carrollton, TX 75006  
 Sales: (972) 713-6272 (888) 997-3933 Fax: (972)735-0964

www.PickerComponents.com  
 e-mail: sales@pickercomponents.com