

Shock-Safe Fuseholder, 5 x 20 / 6.3 x 32 mm, Fingergrip, horizontal



250 VAC · 16 A (UL/CSA)

**Description**

- Screw type fuse carrier

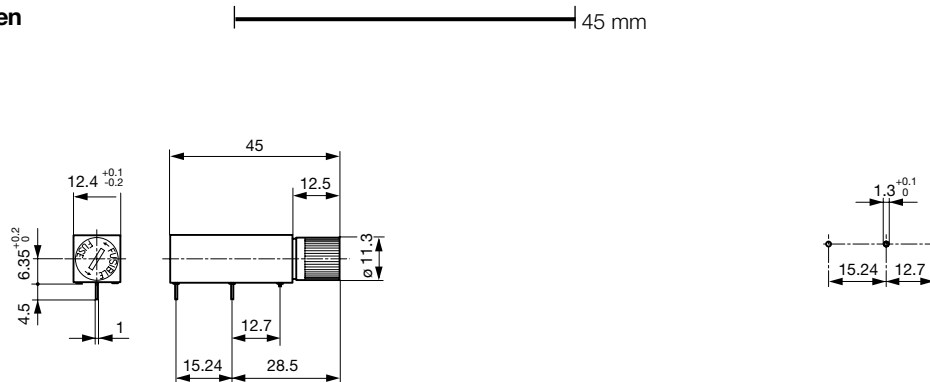
Standards- UL 512
- CSA C22.2 no. 39**Approvals**

- UL File Number: E41738

References[General Product Information](#)**Weblinks**[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#), [Product Change Notification \(PCN\)](#)**Technical Data**

Fuse-Link	5 x 20 or 6.3 x 32 mm
Mounting	PCB
Terminal	Solder THT
Rated Voltage	250VAC
Rated Current	16 A (UL/CSA)
Degree of Protection	IP 40
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/56 acc. to IEC 60068-1
Material: Socket	Thermoset, black
Material: Cap	Thermoplastic, black
Unit Weight (Socket/Cap)	13 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Voltage, Current, Approvals

Soldering Methods	Wave
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27

Abmessungen

Drilling diagram

Variants

Holder	Cap	Fuse-Link	Reference	Order Number
●	Fingergrip	5 x 20mm	231618PD1	7091.7100
●	Fingergrip	6.3 x 32mm	231618PD8	7091.7090
●	-	5 x 20 or 6.3 x 32mm	231618	7091.7110

Packaging Unit Bulk (100 pcs.)

Required Accessory**Description**

[Caps to 231618](#)
Caps to Holder 231618



Fingergrip, 5 x 20 mm, black, IP 40	7091.7120
Fingergrip, 6.3 x 32 mm, black, IP 40	7091.7130