

**isc N-Channel MOSFET Transistor**

**FMP60N280S2HF**

**• FEATURES**

- With TO-220 packaging
- High speed switching
- Very high commutation ruggedness
- Easy to use
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operationz

**• APPLICATIONS**



- PFC stages
- LCD & PDP TV
- Power supply
- Switching applications

**• ABSOLUTE MAXIMUM RATINGS(T<sub>a</sub>=25°C)**

SYMBOL	PARAMETER	VALUE	UNIT
V <sub>DSS</sub>	Drain-Source Voltage	600	V
V <sub>GSS</sub>	Gate-Source Voltage	±30	V
I <sub>D</sub>	Drain Current-Continuous@T <sub>c</sub> =25°C T <sub>c</sub> =100°C	10.4 6.6	A
I <sub>DM</sub>	Drain Current-Single Pulsed	31.2	A
P <sub>D</sub>	Total Dissipation	75	W
T <sub>j</sub>	Operating Junction Temperature	-55~150	°C
T <sub>stg</sub>	Storage Temperature	-55~150	°C

**• THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
R <sub>th(ch-c)</sub>	Channel-to-case thermal resistance	1.67	°C/W
R <sub>th(ch-a)</sub>	Channel-to-ambient thermal resistance	62.5	°C/W

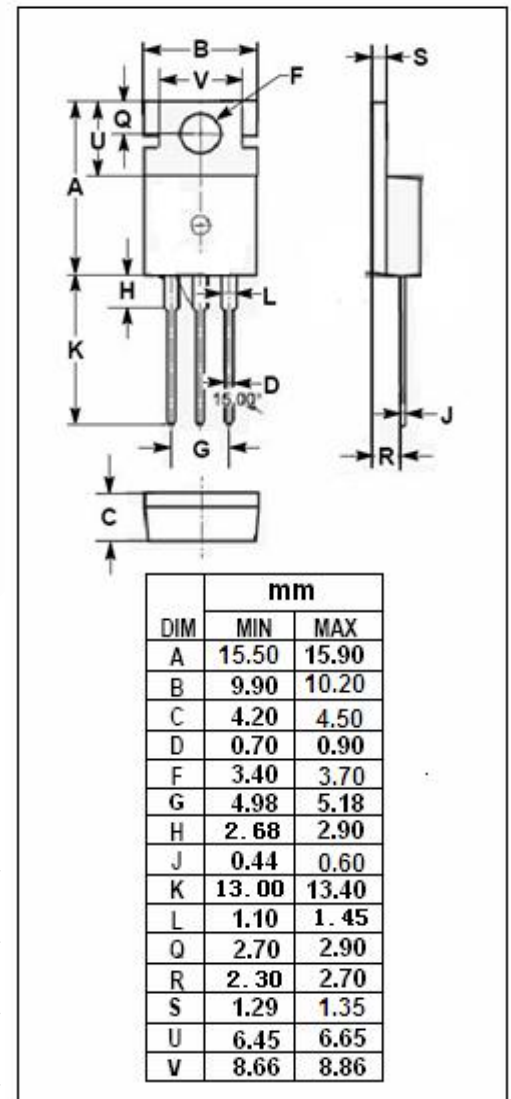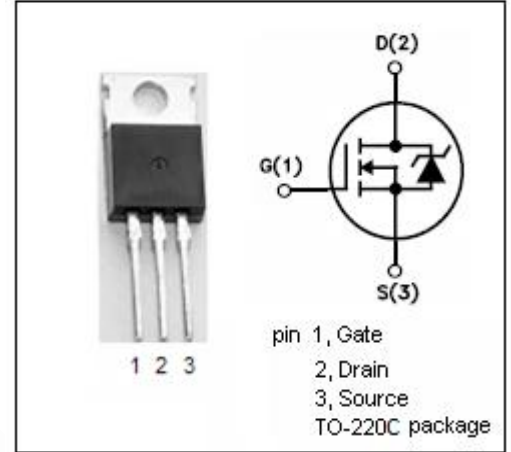

**isc N-Channel MOSFET Transistor**

**FMP60N280S2HF**

**ELECTRICAL CHARACTERISTICS**

T<sub>c</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
B <sub>V</sub> DSS	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V; I <sub>D</sub> = 0.25mA	600			V
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> ; I <sub>D</sub> =0.25mA	2.5		3.5	V
R <sub>DS(on)</sub>	Drain-Source On-Resistance	V <sub>GS</sub> = 10V; I <sub>D</sub> =5.2A		248	280	mΩ
I <sub>GSS</sub>	Gate-Source Leakage Current	V <sub>GS</sub> = ±30V; V <sub>DS</sub> = 0V			±0.1	μA
I <sub>DSS</sub>	Drain-Source Leakage Current	V <sub>DS</sub> = 600V; V <sub>GS</sub> = 0V; T <sub>J</sub> =25°C V <sub>DS</sub> = 480V; V <sub>GS</sub> = 0V; T <sub>J</sub> =125°C			25 250	μA
V <sub>SDF</sub>	Diode forward voltage	I <sub>SD</sub> =10.4A, V <sub>GS</sub> = 0 V			1.35	V