
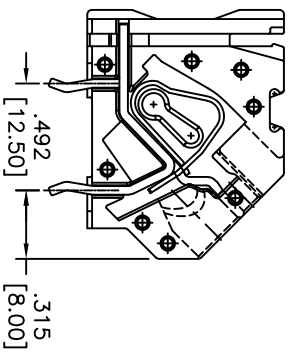
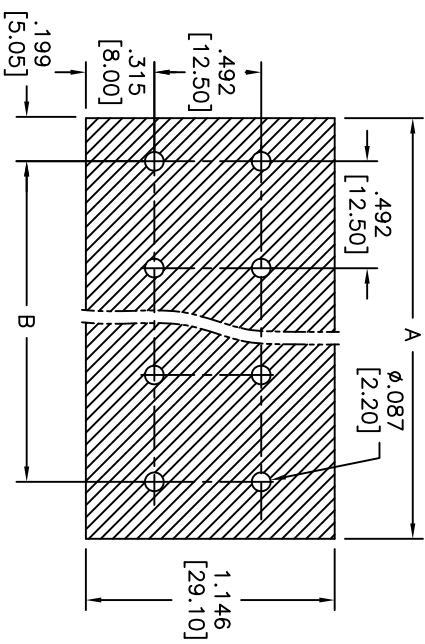
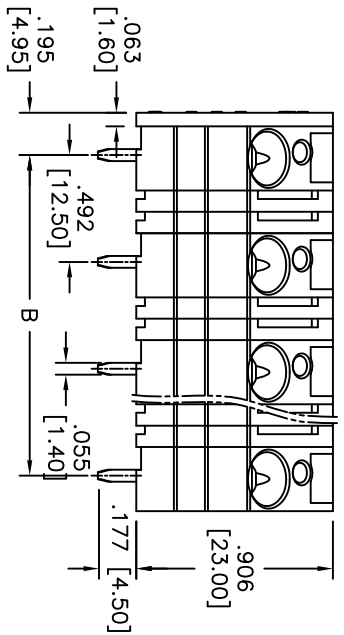


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/20/10	

APPROVED: _____ TITLE: _____
 DATE: _____

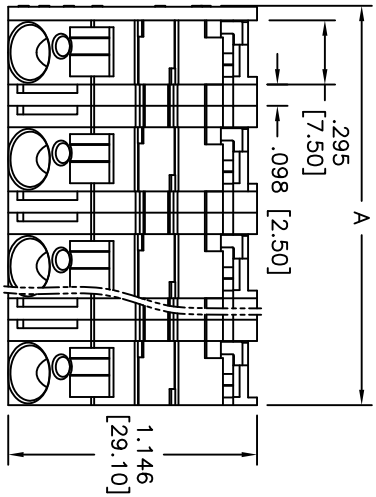

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Grey
 Contact: Copper Alloy, Tin plated
 Clamp: Steel

Electrical:
 Operation voltage: 600 VAC
 Current rating: 30 Amps
 Insulation resistance: 500 mohms min @ DC500V
 Insulation withstands voltage: 2000 VAC for 1 minute

Mechanical:
 Solid wire: 24~8 AWG
 Stand wire: 26~10 AWG
 Environmental:
 Operating temperature: -40°C to +105°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



A = .492 [12.50] X No. of Positions per row - .130 [3.30]
 B = .492 [12.50] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

TITLE	TERMINAL BLOCK, .492 [12.50] PITCH ,PCB
SIZE	PART NO.
X	EB115-XX-U
REF:	S00024T
SCALE:	NTS
SHEET	1 OF 1