

SAW Filter 62.0MHz
Part No: MP04995

Model: TB0888A
Rev No: 1

A. MAXIMUM RATING:

1. Operating temperature range: -40°C to 85°C
2. Storage temperature range: -40°C to 85°C
3. Input Power Level: 10dBm
4. Maximum DC Voltage: 10V

B. CHARACTERISTICS:

Ambient Temperature: 25°C

Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	62	-
Insertion Loss IL	dB	-	16.5	18
-1.5dB bandwidth	MHz	-	1.0	-
-40dB bandwidth	MHz	-	3.0	4.0
Passband Ripple Fc ± 100kHz	MHz	-	0.2	1.0
Group Delay Variation Fc ±100kHz	nsec	-	70	150
Absolute Delay	usec	-	0.8	1.2
Temp. Coefficient	ppm/°C ²	-	-0.036	-
Source Impedance	Ohm	-	50	-
Load Impedance	Ohm	-	50	-

SAW Filter 62.0MHz
Part No: MP04995

Model: TB0888A
Rev No: 1

C. FREQUENCY CHARACTERISTICS:

1. Wide band Response: (span 50MHz)

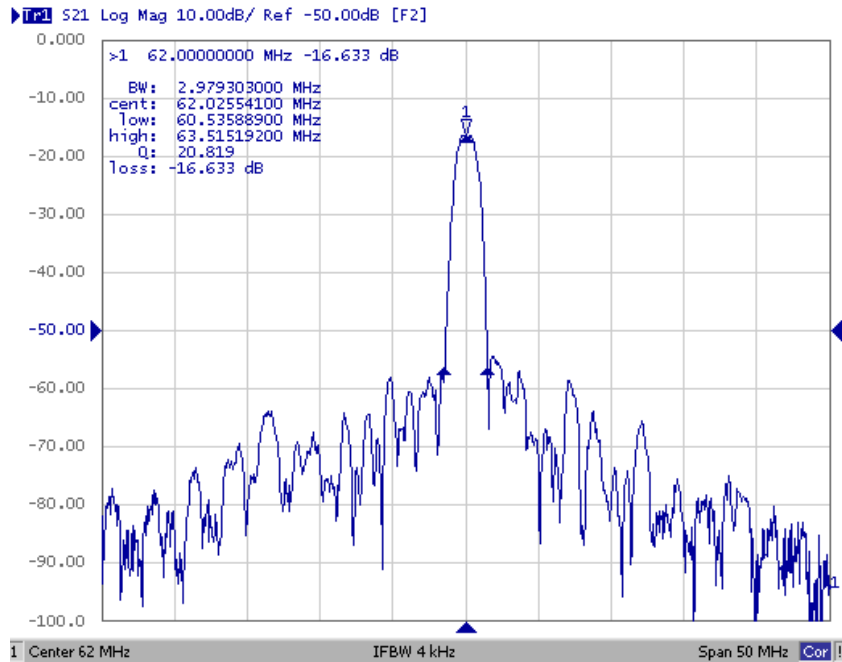


Fig. 1. Horizontal: 5MHz / Div, Vertical: 10Db / Div

2. Pass band Response and Group Delay Response:


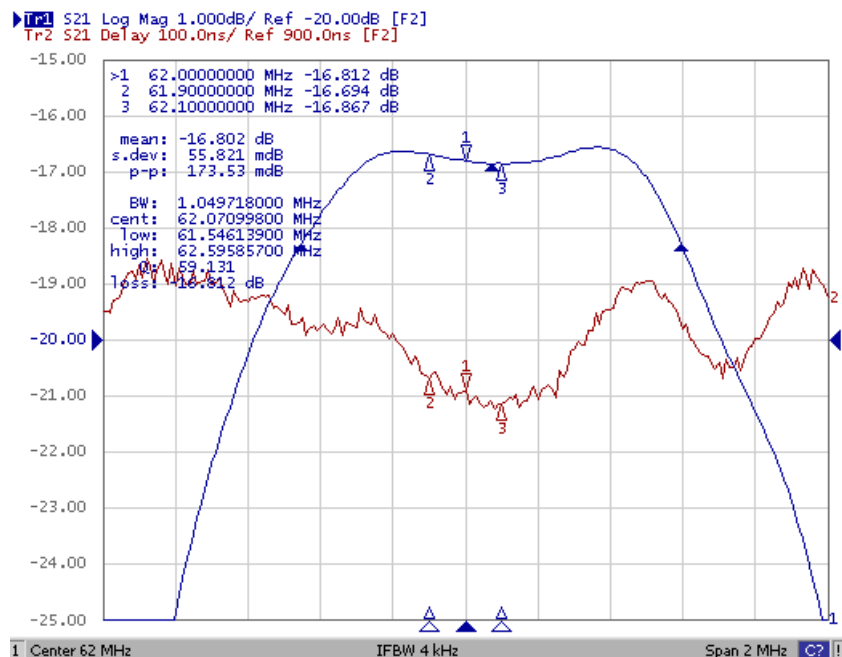


Fig. 2. Horizontal: 0.2MHz / Div, Vertical: 1dB / Div, Vertical: 100ns / Div

SAW Filter 62.0MHz
Part No: MP04995


Model: TB0888A
Rev No: 1

D. MATCHING CIRCUIT:

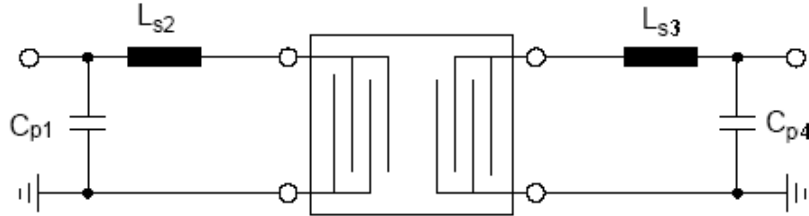


$$L_{s2} = 560\text{nH} + 680\text{nH} \quad L_{s3} = 680\text{nH} + 470\text{nH} \quad C_{p1} = 56\text{pF} \quad C_{p4} = 47\text{pF}$$

E. OUTLINE DRAWING:

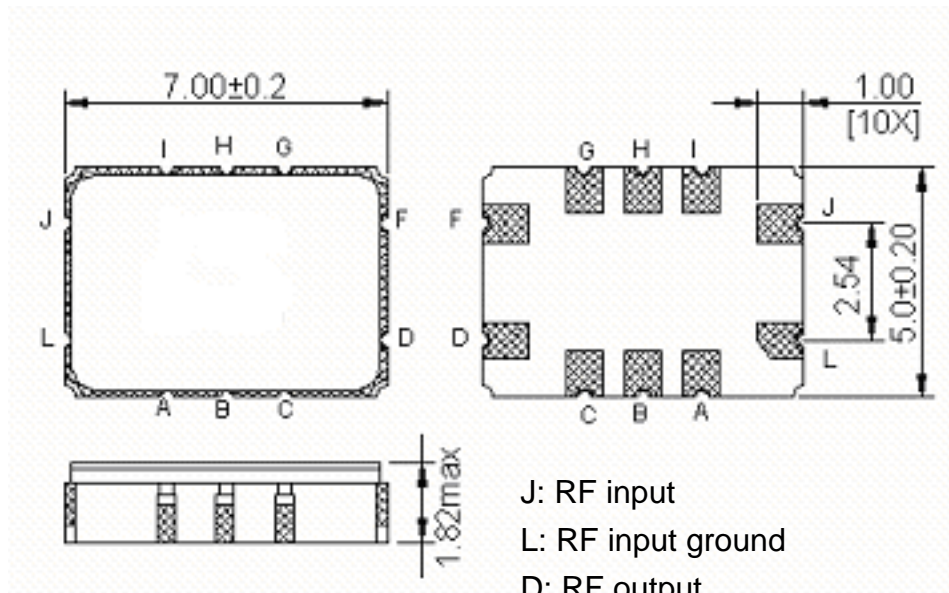

- J: RF input
 - L: RF input ground
 - D: RF output
 - F: RF output ground
 - A, B, C, G, H, I: Ground
- Unit: mm

F. PCB FOOTPRINT:

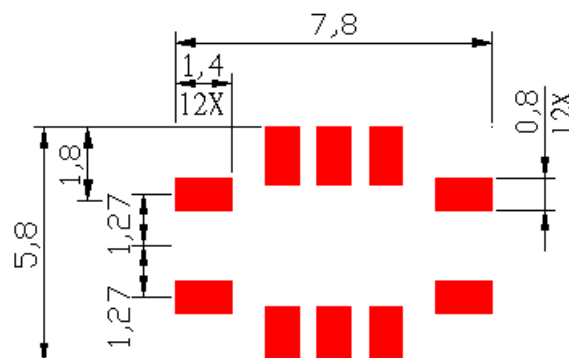


SAW Filter 62.0MHz
Part No: MP04995


Model: TB0888A
Rev No: 1

G. PACKING:

1. Reel Dimension

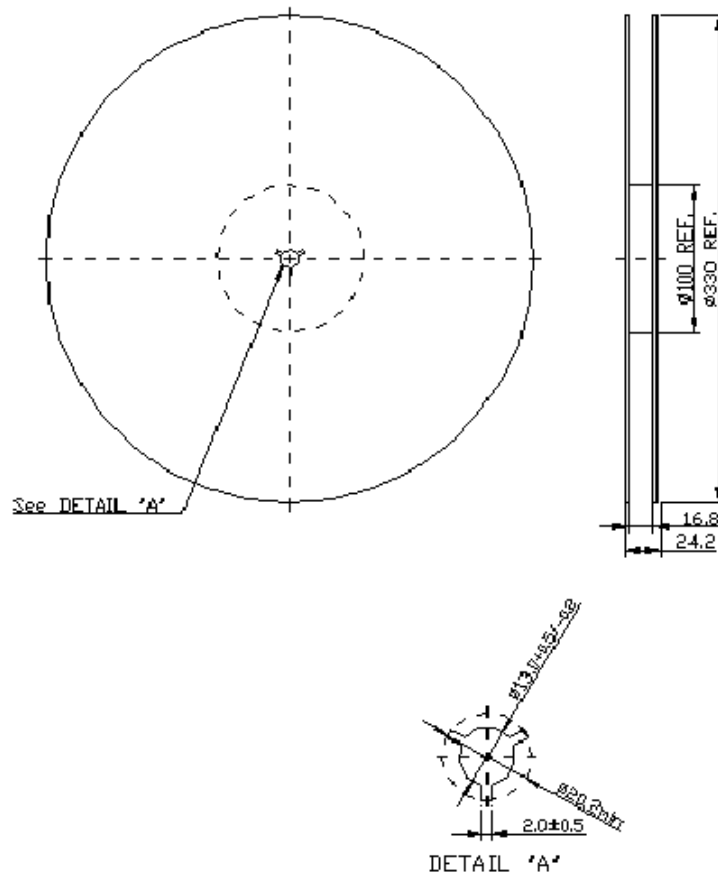

2. Tape Dimension

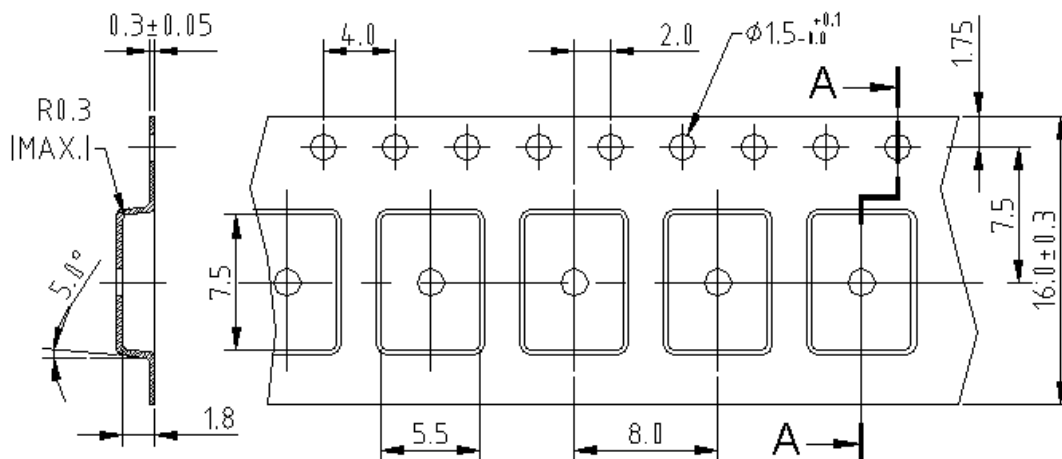

SAW Filter 62.0MHz
Part No: MP04995

Model: TB0888A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

