
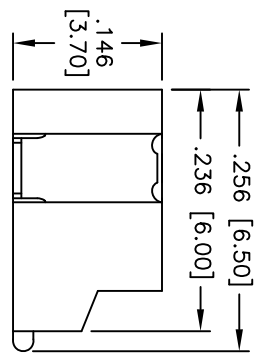
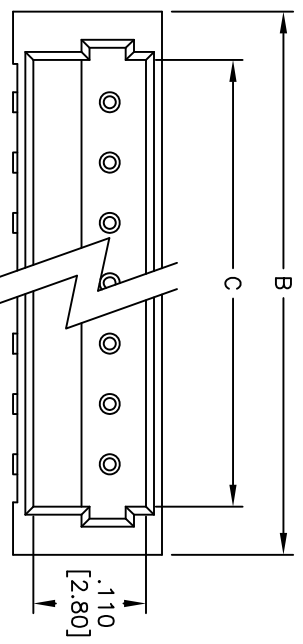


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-	7790	RELEASED	5/10/07	
A		REVISED SHAPE	11/04/09	

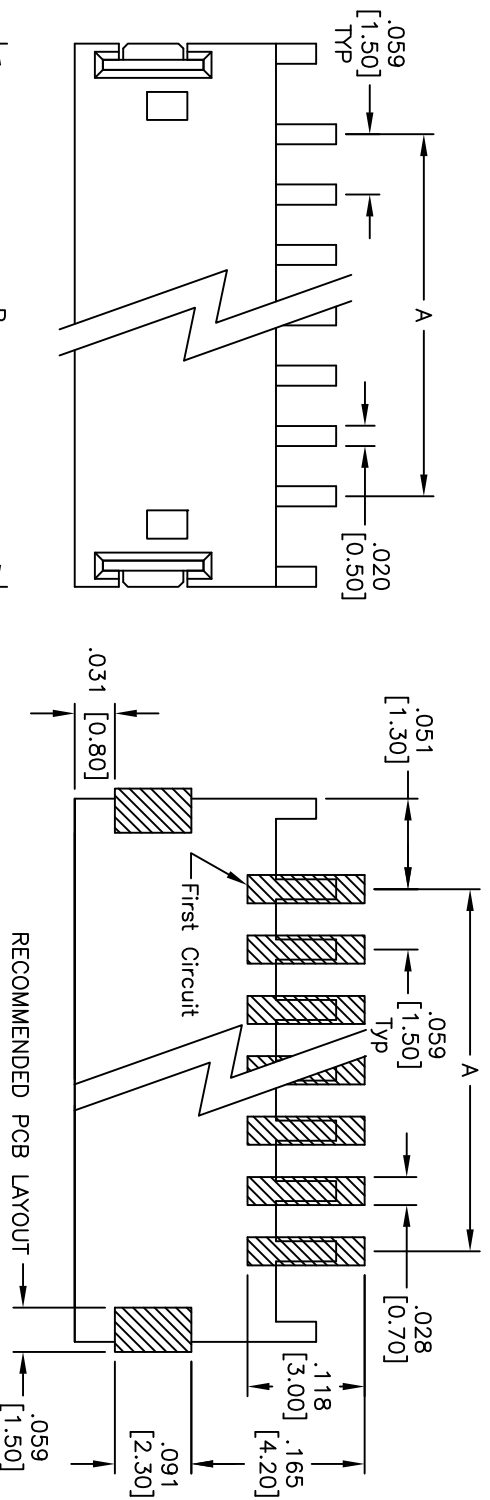

Poles: 2 thru 15  
 A = .059 [1.50] x No. of (Poles-1)  
 B = .059 [1.50] x No. of Poles + .118 [3.00]  
 C = .089 [1.50] x No. of Poles + .024 [0.60]

**SPECIFICATIONS:**  
 Material: Insulator: Nylon 9T, rated UL 94V-0  
 Insulator color: Ivory  
 Contacts: Brass  
**Plating:** Tin over Nickel underplate overall  
**Electrical:**  
 Operating voltage: 50 VAC max  
 Current rating: 1 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 500 Mohms min  
 Insulation withstanding voltage: 500 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering: 260°C for 5 Sec.

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
X .10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010

APPROVALS	DATE

DRAWN	SS	DATE
		11/5/07

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX1 5mm WAFER 90°, SMT

SIZE	PART NO.	REV.
X	15SH-A-XX-TR-SMT-TR	A

REF.	SCALE:	SHEET
S00123T	NTS	1 OF 2

