

# EDA100 SERIES

AC-DC ENCLOSED SWITCHING POWER SUPPLY



## FEATURES

- UNIVERSAL INPUT 88~264VAC
- SHORT CIRCUIT PROTECTION
- INTERNAL INPUT FILTER
- 3 YEARS WARRANTY
- HIGH EFFICIENCY UP TO 89%
- HIGH AVERAGE EFFICIENCY MEET ErP (except 5V model)
- LOW STANDBY POWER CONSUMPTION
- BUILT IN ACTIVE PFC



## MODEL LIST

| MODEL NO.                   | INPUT VOLTAGE | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) | EFF. (avg.) |
|-----------------------------|---------------|----------------|----------------|----------------|-------------|-------------|-------------|
| <b>Single Output Models</b> |               |                |                |                |             |             |             |
| EDA100-05                   | 88~264 VAC    | 80 WATTS       | + 5 VDC        | 16000 mA       | 78%         | 80%         | 80%         |
| EDA100-12                   | 88~264 VAC    | 102 WATTS      | + 12 VDC       | 8500 mA        | 85%         | 87%         | 87%         |
| EDA100-15                   | 88~264 VAC    | 105 WATTS      | + 15 VDC       | 7000 mA        | 86%         | 88%         | 87%         |
| EDA100-24                   | 88~264 VAC    | 108 WATTS      | + 24 VDC       | 4500 mA        | 87%         | 89%         | 88%         |

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

| GENERAL                       |                             |                  |      |         |           |  |
|-------------------------------|-----------------------------|------------------|------|---------|-----------|--|
| Characteristics               | Conditions                  | min.             | typ. | max.    | unit      |  |
| Switching frequency           | Vi nom, Io nom              | 60               |      | 75      | KHz       |  |
| Isolation voltage             | Input-Output                | 3,000 / 4,242    |      |         | VAC / VDC |  |
|                               | Input-FG                    | 1,500 / 2,121    |      |         | VAC / VDC |  |
|                               | Output-FG                   | 500 / 710        |      |         | VAC / VDC |  |
| Isolation resistance          | Input-Output, @ 500VDC      | 100              |      |         | MΩ        |  |
| Ambient temperature           | Operating at Vi nom         | -40              |      | + 71    | °C        |  |
| Derating (see derating curve) | Vi nom, from 56°C to + 71°C |                  |      | 2.5     | % / °C    |  |
| Storage temperature           | Non operational             | -40              |      | + 85    | °C        |  |
| Relative humidity             | Vi nom, Io nom              | 20               |      | 95      | % RH      |  |
| Temperature coefficient       | Vi nom, Io min              |                  |      | ± 0.03  | % / °C    |  |
| MTBF                          | Bellcore Issue 6 @40°C, GB  | 5V               |      | 470,000 | Hours     |  |
|                               |                             | 12V & 15V        |      | 521,000 | Hours     |  |
|                               |                             | 24V              |      | 545,000 | Hours     |  |
| Altitude during operation     | IEC 60068-2-13              |                  |      | 4,850   | m         |  |
| Cooling                       | Free air convection         | L158 x W97 x H38 |      |         |           |  |

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

### INPUT SPECIFICATIONS

| Characteristics           | Conditions                  | min. | typ.        | max.    | unit |
|---------------------------|-----------------------------|------|-------------|---------|------|
| Rated input voltage       | Io nom                      | 100  |             | 240     | VAC  |
| Absolute input max. range | AC in                       | 88   |             | 264     | VAC  |
|                           | DC in                       | 120  |             | 375     | VDC  |
| Input current             | Vi : 115 / 230 VAC , Io nom |      | 1,060 / 530 |         | mA   |
| Rated input current       | Vi : 88 VAC, Io nom         |      |             | 1,500   | mA   |
| Line frequency            | Vi nom, Io nom              | 47   |             | 63      | Hz   |
| Inrush current            | Vi : 115 / 230 VAC , Io nom |      |             | 35 / 60 | A    |
| Power dissipation         | Vi : 230 VAC, Io nom        | 5V   | 20          |         | W    |
|                           |                             | 12V  | 15          |         | W    |
|                           |                             | 15V  | 12          |         | W    |
|                           |                             | 24V  | 10          |         | W    |
| Leakage current           | Input-Output                |      |             | 0.25    | mA   |
|                           | Input-FG                    |      |             | 3.5     | mA   |
| Standby power consumption | Vi nom, Io=0A               |      |             | 0.8     | W    |
|                           | 5V<br>12V, 15V & 24V        |      |             | 0.5     | W    |
| Power factor (Active)     | Vi : 115/230VAC, Io nom     |      | 0.99 / 0.96 |         |      |

### OUTPUT SPECIFICATIONS

| Characteristics                                    | Conditions   | min.   | typ.                             | max.  | unit |
|--|--|--|----------------------------------|-------|------|
| Output voltage accuracy (Adjusted before shipment) | Vi nom, Io max   | 0  |                                  | + 1   | %    |
| Minimum load                                       | Vi nom   | 0  |                                  |       | %    |
| Line regulation                                    | Io nom, Vi min ...Vi max   |  |                                  | ± 0.5 | %    |
| Load regulation                                    | Vi nom, Io min ...Io nom   |  |                                  | ± 1   | %    |
| Voltage trim range                                 | Vi nom,<br>0.8 Io nom  | 5V   | 4.75                             | 5.5   | VDC  |
|  |  | 12V  | 10.8                             | 13.2  | VDC  |
|  |  | 15V  | 13.5                             | 16.5  | VDC  |
|  |  | 24V  | 21.6                             | 27.6  | VDC  |
| Rated continuous loading                           | Vi nom   | 5V   | 16 A @ 5Vdc / 1.4 A @ 5.5 Vdc    |       |      |
|  |  | 12V  | 8.5 A @ 12Vdc / 7.6 A @ 13.2 Vdc |       |      |
|  |  | 15V  | 7.0 A @ 15Vdc / 6.0 A @ 16.5 Vdc |       |      |
|  |  | 24V  | 4.5 A @ 24Vdc / 3.6 A @ 27.6 Vdc |       |      |
| Hold up time                                       | Vi : 115 / 230 VAC , Io nom  | 10 / 70  |                                  |       | ms   |
| Turn on time                                       | Vi nom, Io nom   |  |                                  | 1,500 | ms   |
|  | Vi nom, Io nom → 5V, 12V & 15V models : with 7000 μF CAP<br>24V model : with 3500 μF CAP |  |                                  | 2,000 | ms   |
| Rise time  | Vi nom, Io nom   |  |                                  | 150   | ms   |
|  | Vi nom, Io nom → 5V, 12V & 15V models : with 7000 μF CAP<br>24V model : with 3500 μF CAP |  |                                  | 500   | ms   |
| Fall time  | Vi nom, Io nom   |  |                                  | 150   | ms   |
| Transient recovery time                            | Vi nom, I ~ 0.5 Io nom   |  |                                  | 2     | ms   |
| Ripple & noise                                     | Vi nom, Io nom, BW = 20MHz   |  |                                  | 100   | mV   |
| Power back immunity                                | Vi nom, Io nom<br>1 second   | 5V   | 7.5                              |       | VDC  |
|  |  | 12V  | 18                               |       | VDC  |
|  |  | 15V  | 22                               |       | VDC  |
|  |  | 24V  | 35                               |       | VDC  |
| Capacitor load                                     | Vi nom, Io nom   | 5V, 12V & 15V                                      |                                  | 7,000 | μF   |
|  |  | 24V  |                                  | 3,500 | μF   |
| Efficiency   | Vi nom, Io nom, Po / Pi  | Up to 89%, See model list and typ efficiency curve |                                  |       |      |

### CONTROL AND PROTECTION

| Characteristics                   | Conditions                             | min.                     | typ. | max. | unit |
|-----------------------------------|--|--------------------------|------|------|------|
| Input fuse                        |  | T3.15A / 250VAC internal |      |      |      |
| Internal surge voltage protection | IEC 61000-4-5                          | Varistor                 |      |      |      |
| Rated over load protection        | Vi nom (see typ current limited curve) | 130                      |      | 160  | %    |

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

### CONTROL AND PROTECTION

| Characteristics         | Conditions                         |     | min.        | typ. | max.  | unit |
|-------------------------|------------------------------------|-----|-------------|------|-------|------|
| Over voltage protection | Vi nom, 0.8 Io nom (Auto Recovery) | 5V  | 5.75        |      | 6.75  | VDC  |
|                         |                                    | 12V | 13.8        |      | 16.2  | VDC  |
|                         |                                    | 15V | 17.25       |      | 20.25 | VDC  |
|                         |                                    | 24V | 28.8        |      | 32.4  | VDC  |
| Output short circuit    |                                    |     | Hiccup mode |      |       |      |


### APPROVALS AND STANDARDS

|                      |  |
|----------------------|--|
| UL / cUL             | UL 60950-1 Recognized  |
| TUV                  | EN 60950-1   |
| CE                   | EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024<br>EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8<br>EN 61000-4-11, ENV 50204, EN 61204-3 |
| Vibration resistance | meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)  |
| Shock resistance     | meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 Faces, 3 times for each Face)  |

### PHYSICAL CHARACTERISTICS

|               |  |
|---------------|--|
| Case size     | 158 x 97 x 38 mm (6.22 x 3.82 x 1.50 inches) |
| Case material | Metal  |
| Weight        | 520 g  |
| Packing       | 0.57kg ; 24pcs / 14.5kg / 1.01CUFT           |

### MECHANISM & PIN CONFIGURATION

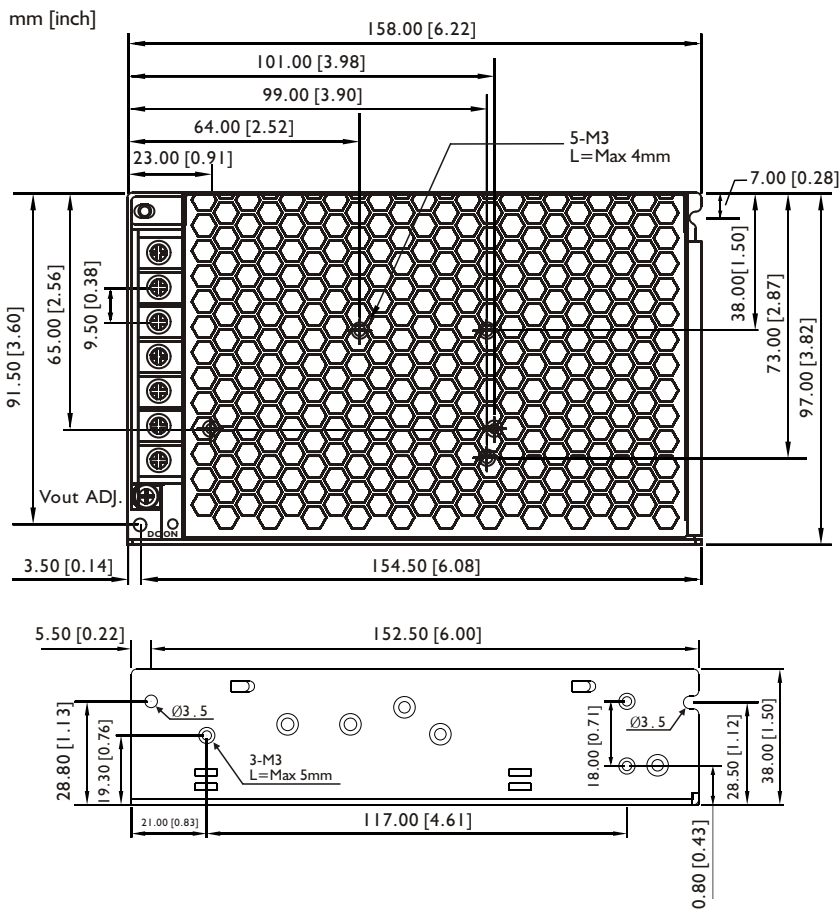


#### INSTALLATION

Ventilation / Cooling  
Normal convection  
Connector size range  
AWG22-14 (0.2~2mm<sup>2</sup>) flexible / solid cable,  
connector can withstand torque at maximum  
12 pound-inches.

#### GENERAL TOLERANCE

|                              |             |
|------------------------------|-------------|
| 0.00[0.00] - 30.00[1.18]     | ±0.30[0.01] |
| 30.00[1.18] - 120.00[4.72]   | ±0.50[0.02] |
| 120.00[4.72] - 400.00[15.75] | ±0.80[0.03] |

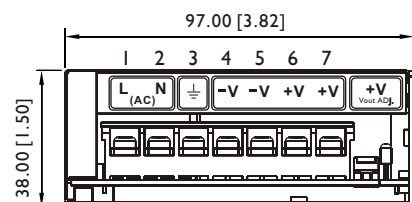


## PIN ASSIGNMENT


| PIN NO. | Designation | Description |
|---------|-------------|-------------|
| 1       | IN          | L           |
| 2       |             | N           |
| 3       |             | ⊕           |
| 4, 5    | OTHER OUT   | V -         |
| 6, 7    |             | V +         |
|         |             | Vout ADJ.   |
|         |             | DC ON       |

Input terminals (phase conductor, no polarity at DC input)  
 Input terminals (neutral conductor, no polarity at DC input)  
 Ground this terminal to minimize high-frequency emissions  
 Negative output terminal  
 Positive output terminal  
 Trimmer-potentiometer for Vout adjustment  
 Operation indicator LED


## CIRCUIT SCHEMATIC

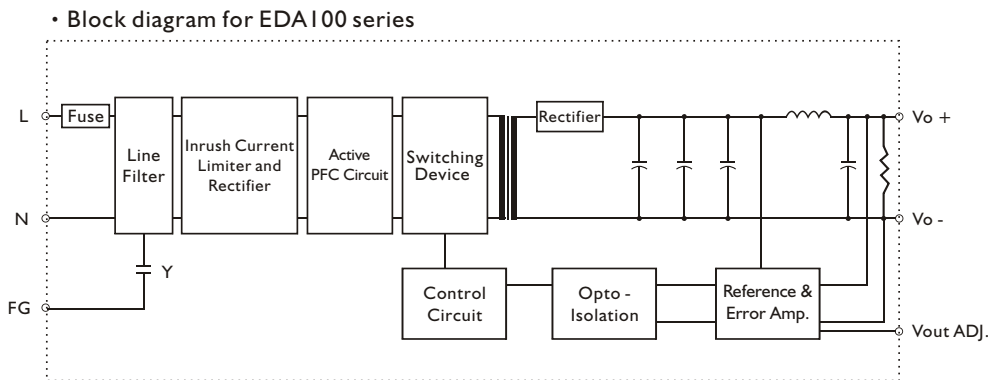


## DERATING CURVE

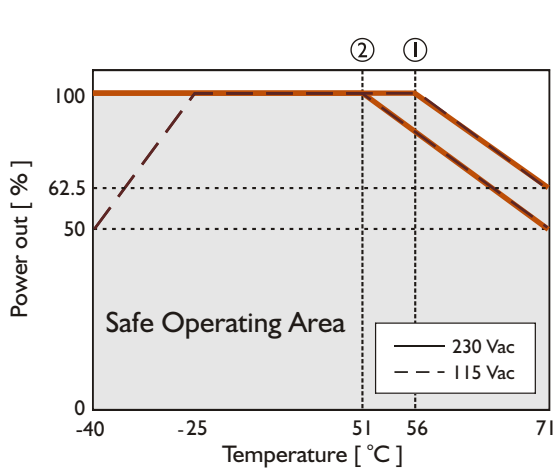

① For EDA100-12/15/24    ② For EDA100-05

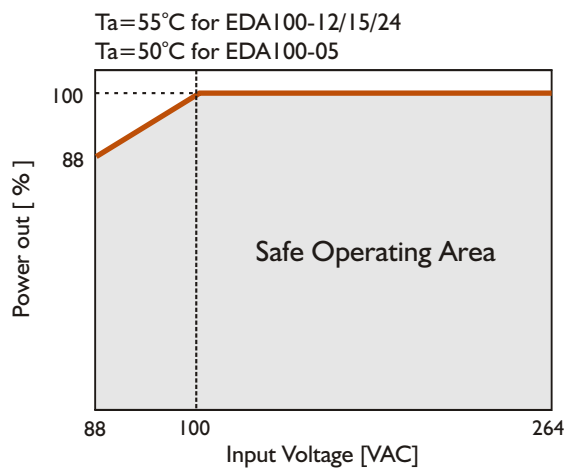

## TYP. CURRENT LIMITED CURVE

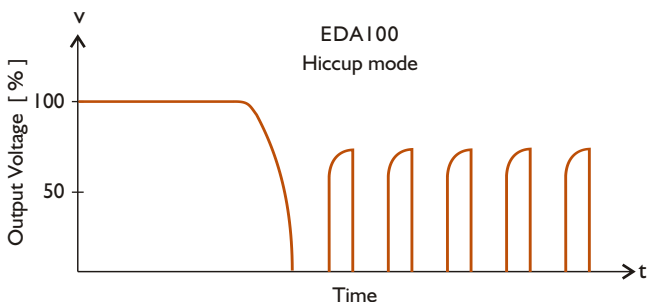

## TYP. EFFICIENCY CURVE

