

LOW CAPACITANCE FLIP CHIP ARRAY

APPLICATIONS

- ✓ Cellular Phones
- ✓ Personal Digital Assistant (PDA)
- ✓ Notebook Computers
- ✓ SMART Cards

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns

FEATURES


- ✓ ESD Protection > 25 kilovolts
- ✓ Available in Six Voltage Types Ranging From 3.3V to 24V
- ✓ 200 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- ✓ Low Clamping Voltage
- ✓ Bidirectional Configuration & Monolithic Structure
- ✓ Protects 1 to 3 Lines
- ✓ **LOW CAPACITANCE**
- ✓ **LOW LEAKAGE CURRENT**

MECHANICAL CHARACTERISTICS

- ✓ Standard EIA Chip Size: 0404
- ✓ Weight 0.73 milligrams (Approximate)
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Plastic & Paper Tape and Reel Per EIA Standard 481
- ✓ Device Marking On Reel
- ✓ Top Contacts: Solder Bump 0.004" in Height (Nominal)

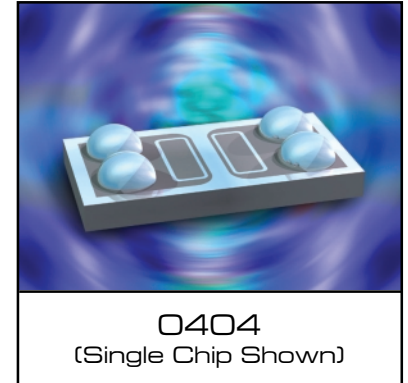

PIN CONFIGURATION





DEVICE CHARACTERISTICS





MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	200	Watts
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified						
PART NUMBER (See Note 1)	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM LEAKAGE CURRENT (See Note 2)	TYPICAL CAPACITANCE
		@ 1mA $V_{(BR)}$ VOLTS	@ $I_p = 1A$ V_C VOLTS	@ 8/20 μs $V_C @ I_{PP}$	@ V_{WM} I_D μA	@ 0V, 1 MHz C pF
LC0404FC3.3C	3.3	4.0	7.0	12.5V @ 16A	75*	70
LC0404FC05C	5.9	6.0	11.0	13V @ 15A	10**	35
LC0404FC08C	8.0	8.5	13.2	18V @ 11A	1	32
LC0404FC12C	12.0	13.3	19.8	26.9V @ 7.4A	1	30
LC0404FC15C	15.0	16.7	25.4	34.5V @ 5.8A	1	25
LC0404FC24C	24.0	26.7	37.2	50.6V @ 4A	1	20

Note 1: All devices are bidirectional. Electrical characteristics apply in both directions.
Note 2: *Maximum leakage current < 5 μA @ 2.8V. **Maximum leakage current < 500nA @ 3.3V.

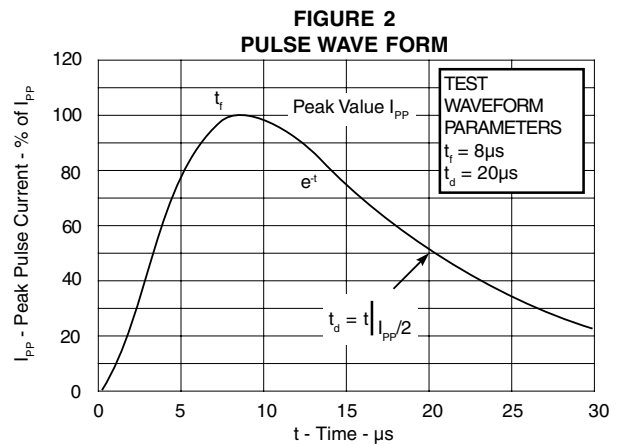
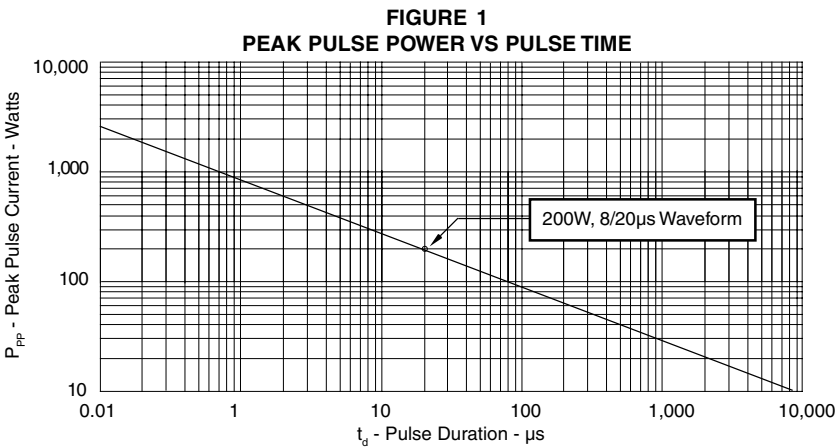


GRAPHS

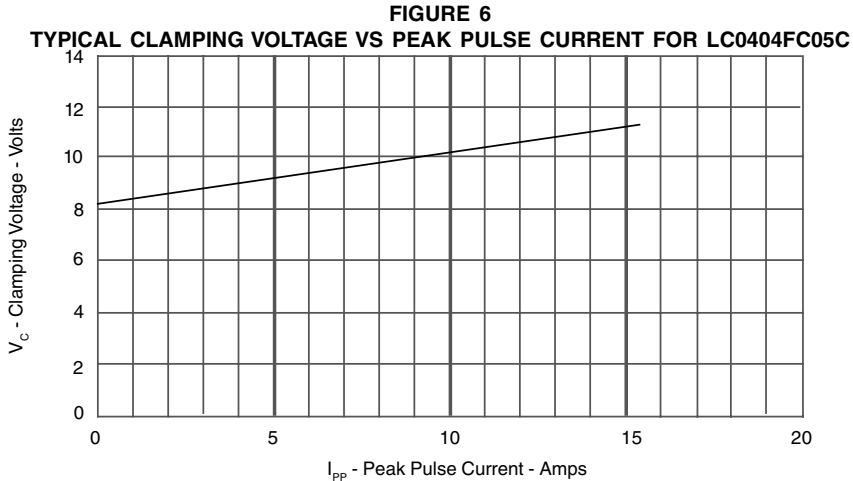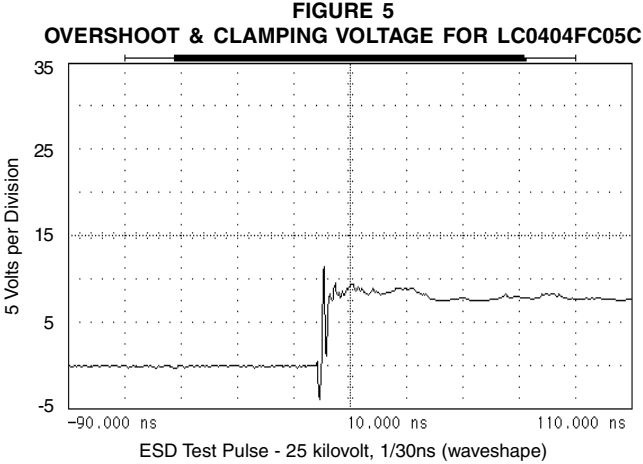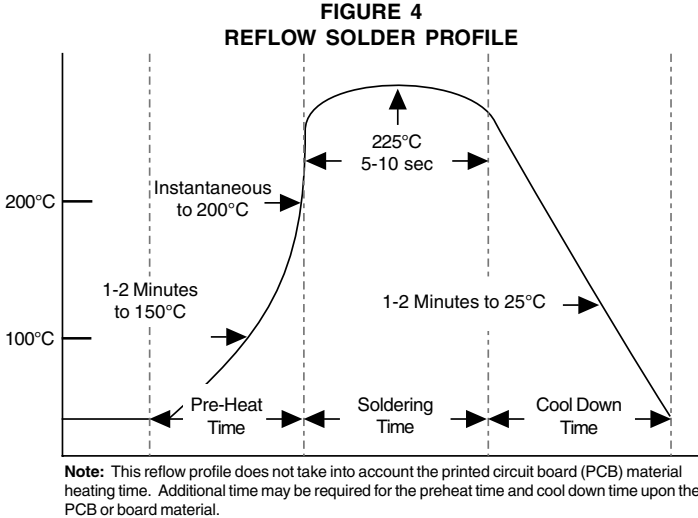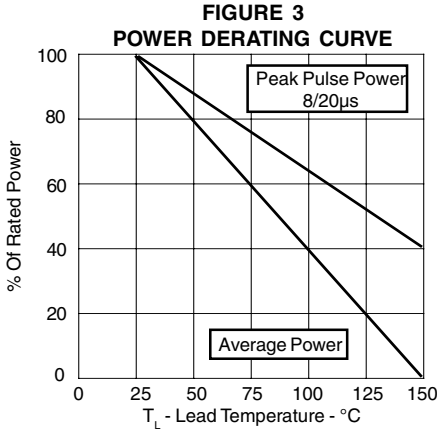

LC0404FC3.3C thru LC0404FC24C


PACKAGE OUTLINE & DIMENSIONS

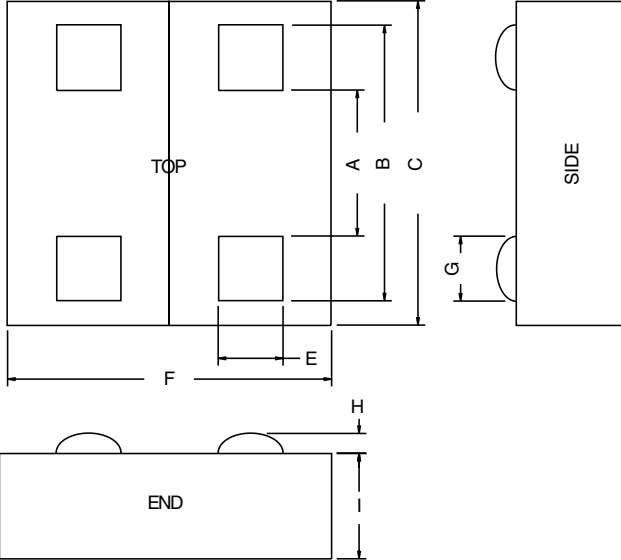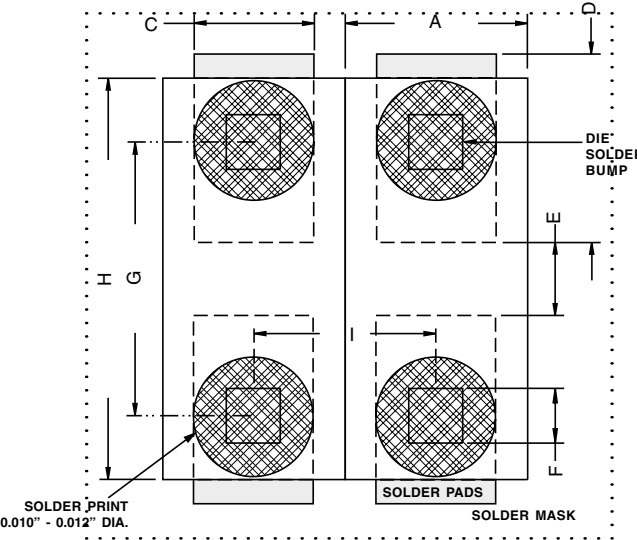PACKAGE OUTLINE		PACKAGE DIMENSIONS																															
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">DIM</th> <th style="text-align: center;">MILLIMETERS</th> <th style="text-align: center;">INCHES</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">A</td> <td style="text-align: center;">0.56 NOM</td> <td style="text-align: center;">0.022 NOM</td> </tr> <tr> <td style="text-align: center;">B</td> <td style="text-align: center;">0.86 NOM</td> <td style="text-align: center;">0.034 NOM</td> </tr> <tr> <td style="text-align: center;">C</td> <td style="text-align: center;">1.0 ± 0.02</td> <td style="text-align: center;">0.039 ± 0.001</td> </tr> <tr> <td style="text-align: center;">E</td> <td style="text-align: center;">0.15 SQ</td> <td style="text-align: center;">0.006 SQ</td> </tr> <tr> <td style="text-align: center;">F</td> <td style="text-align: center;">1.0 ± 0.0254</td> <td style="text-align: center;">0.039 ± 0.001</td> </tr> <tr> <td style="text-align: center;">G</td> <td style="text-align: center;">0.15 NOM</td> <td style="text-align: center;">0.006 NOM</td> </tr> <tr> <td style="text-align: center;">H</td> <td style="text-align: center;">0.127 MAX 0.076 MIN</td> <td style="text-align: center;">0.005 MAX 0.003 MIN</td> </tr> <tr> <td style="text-align: center;">I</td> <td style="text-align: center;">0.406 NOM</td> <td style="text-align: center;">0.016 NOM</td> </tr> </tbody> </table>	DIM	MILLIMETERS	INCHES	A	0.56 NOM	0.022 NOM	B	0.86 NOM	0.034 NOM	C	1.0 ± 0.02	0.039 ± 0.001	E	0.15 SQ	0.006 SQ	F	1.0 ± 0.0254	0.039 ± 0.001	G	0.15 NOM	0.006 NOM	H	0.127 MAX 0.076 MIN	0.005 MAX 0.003 MIN	I	0.406 NOM	0.016 NOM	<p>NOTES:</p> <ol style="list-style-type: none"> Controlling dimensions in inches. Decimal tolerances for mounting pad and outline: .xxx ± 0.05mm (± 0.002"). 			
DIM	MILLIMETERS	INCHES																															
A	0.56 NOM	0.022 NOM																															
B	0.86 NOM	0.034 NOM																															
C	1.0 ± 0.02	0.039 ± 0.001																															
E	0.15 SQ	0.006 SQ																															
F	1.0 ± 0.0254	0.039 ± 0.001																															
G	0.15 NOM	0.006 NOM																															
H	0.127 MAX 0.076 MIN	0.005 MAX 0.003 MIN																															
I	0.406 NOM	0.016 NOM																															
<p style="text-align: center;">MOUNTING PAD LAYOUT - Option 1</p> 		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">DIM</th> <th style="text-align: center;">MILLIMETERS</th> <th style="text-align: center;">INCHES</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">A</td> <td style="text-align: center;">0.51</td> <td style="text-align: center;">0.020</td> </tr> <tr> <td style="text-align: center;">C</td> <td style="text-align: center;">0.30</td> <td style="text-align: center;">0.012</td> </tr> <tr> <td style="text-align: center;">D</td> <td style="text-align: center;">0.46</td> <td style="text-align: center;">0.018</td> </tr> <tr> <td style="text-align: center;">E</td> <td style="text-align: center;">0.20</td> <td style="text-align: center;">0.008</td> </tr> <tr> <td style="text-align: center;">F</td> <td style="text-align: center;">0.15 SQ</td> <td style="text-align: center;">0.006 SQ</td> </tr> <tr> <td style="text-align: center;">G</td> <td style="text-align: center;">0.71</td> <td style="text-align: center;">0.028</td> </tr> <tr> <td style="text-align: center;">H</td> <td style="text-align: center;">0.99</td> <td style="text-align: center;">0.039</td> </tr> <tr> <td style="text-align: center;">I</td> <td style="text-align: center;">0.51</td> <td style="text-align: center;">0.020</td> </tr> </tbody> </table>			DIM	MILLIMETERS	INCHES	A	0.51	0.020	C	0.30	0.012	D	0.46	0.018	E	0.20	0.008	F	0.15 SQ	0.006 SQ	G	0.71	0.028	H	0.99	0.039	I	0.51	0.020	<p>NOTE:</p> <ol style="list-style-type: none"> <i>Preferred:</i> Using 0.1mm (0.004") stencil. 	
DIM	MILLIMETERS	INCHES																															
A	0.51	0.020																															
C	0.30	0.012																															
D	0.46	0.018																															
E	0.20	0.008																															
F	0.15 SQ	0.006 SQ																															
G	0.71	0.028																															
H	0.99	0.039																															
I	0.51	0.020																															
		<p>Outline & Dimensions: Rev 3 - 11/02, 06022</p>																															

LC0404FC3.3C thru LC0404FC24C

PACKAGE OUTLINE & DIMENSIONS

MOUNTING PAD LAYOUT - Option 2

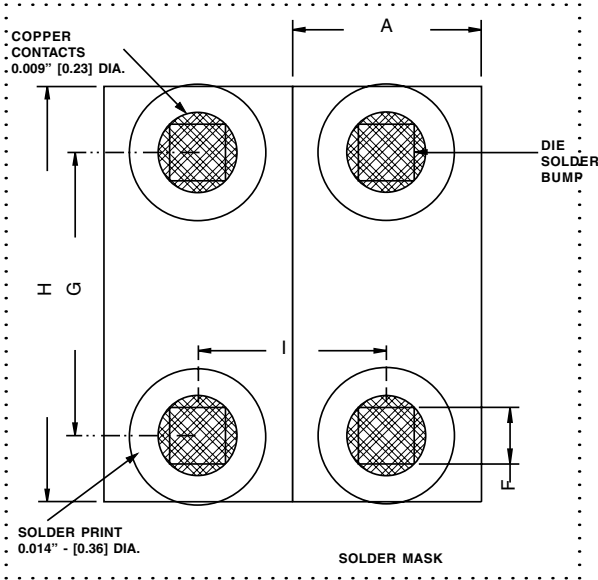


PACKAGE DIMENSIONS

DIM	MILLIMETERS	INCHES
A	0.51	0.020
F	0.15 SQ	0.006 SQ
G	0.71	0.028
H	0.99	0.039
I	0.51	0.020

- NOTES:**
1. Controlling dimensions in inches.
 2. Decimal tolerances for mounting pad and outline: .xxx ± 0.05mm (± 0.002").
 3. Preferred: Using 0.1mm (0.004") stencil.

Outline & Dimensions: Rev 3 - 11/02, 06022

TAPE & REEL ORIENTATION



- NOTE:**
1. Top view of tape. Solder bumps are face down in tape package.

TAPE & REEL ORDERING NOMENCLATURE

1. Surface mount product is taped and reeled in accordance with EIA 481.
2. 8mm Plastic Tape: 7 Inch Reels - 5,000 pieces per reel. Ordering Suffix: -T75-1 (i.e., LC0404FC05C-T75-1).
3. 8mm Paper Tape: 7 Inch Reels - 10,000 pieces per reel. Ordering Suffix: -T710-2 (i.e., LC0404FC05C-T710-2).

COPYRIGHT © ProTek Devices 2003
 SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).
 DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
 2929 South Fair Lane, Tempe, AZ 85282
 Tel: 602-431-8101 Fax: 602-431-2288
 E-Mail: sales@protekdevices.com
 Web Site: www.protekdevices.com