

isc Silicon NPN Power Transistor

3DD104A

DESCRIPTION

- With TO-3 packaging
- Large collector current
- Low collector saturation voltage
- High power dissipation
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS



- Designed for use in DC-DC converter
- Driver of solenoid or motor

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CB0}	Collector-Base Voltage	300	V
V _{CEO}	Collector-Emitter Voltage	200	V
V _{EB0}	Emitter-Base Voltage	4	V
I _c	Collector Current-Continuous	3	A
P _D	Total Power Dissipation@T _c =75°C	50	W
T _J	Max.Junction Temperature	175	°C
T _{stg}	Storage Temperature	-55~175	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal Resistance,Junction to Case	2.0	°C/W

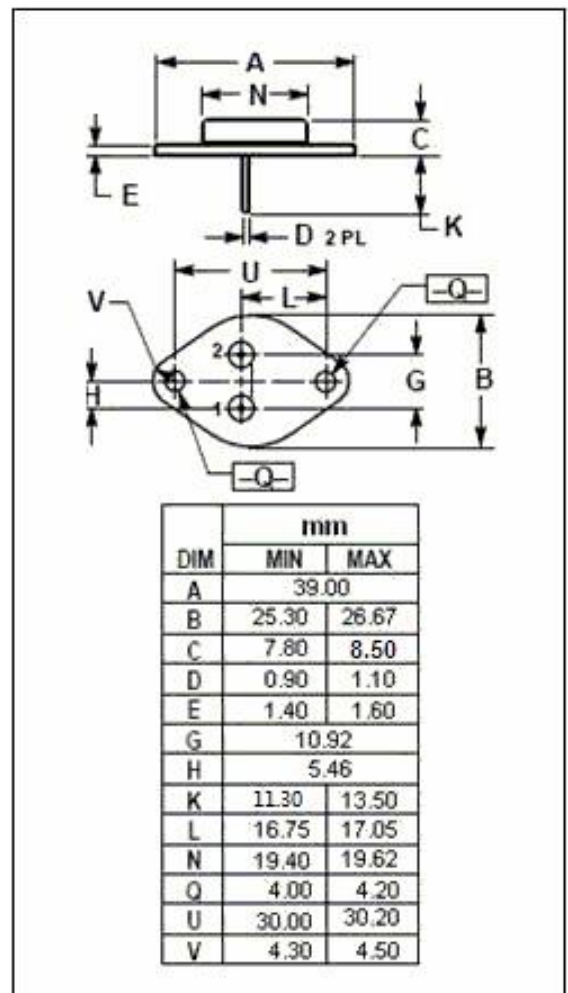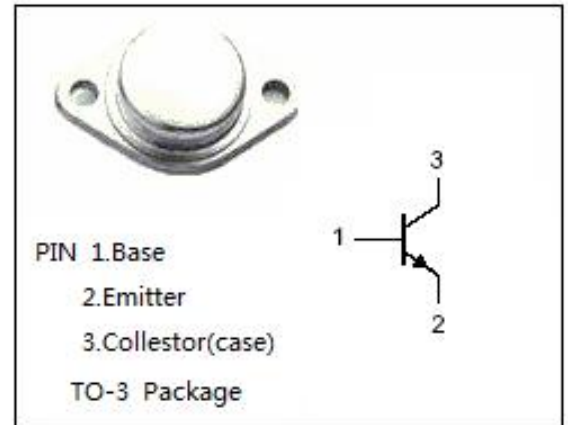

isc Silicon NPN Power Transistor**3DD104A****ELECTRICAL CHARACTERISTICS** $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
BV_{CEO}	Collector-Emitter Sustaining Voltage	$I_C= 5\text{mA}; I_B= 0$	200		V
BV_{CBO}	Collector-Base Sustaining Voltage	$I_C= 5\text{mA}; I_E= 0$	300		V
BV_{EBO}	Emitter-Base Sustaining Voltage	$I_E= 5\text{mA}; I_C= 0$	4		V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C= 3\text{A}; I_B= 1\text{A}$		2	V
I_{CBO}	Collector Cutoff Current	$V_{CB}= 100\text{V}; I_E= 0$		0.1	mA
h_{FE}	DC Current Gain	$I_C= 1.5\text{A}; V_{CE}= 10\text{V}$	20		