


1 - Cathode  
2 - Anode  
Case Isolated

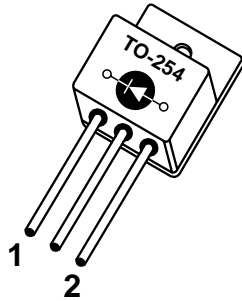

**ADVANCED  
POWER  
TECHNOLOGY®**  
APT15D60C 600V 15A

## ULTRAFAST SOFT RECOVERY RECTIFIER DIODE

| PRODUCT APPLICATIONS   | PRODUCT FEATURES  | PRODUCT BENEFITS  |
|--|---|---|
| <ul style="list-style-type: none"> <li>• Anti-Parallel Diode               <ul style="list-style-type: none"> <li>-Switchmode Power Supply</li> <li>-Inverters</li> </ul> </li> <li>• Free Wheeling Diode               <ul style="list-style-type: none"> <li>-Motor Controllers</li> <li>-Converters</li> </ul> </li> <li>• Snubber Diode</li> <li>• Uninterruptible Power Supply (UPS)</li> <li>• Induction Heating</li> <li>• High Speed Rectifiers</li> </ul> | <ul style="list-style-type: none"> <li>• Ultrafast Recovery Times</li> <li>• Soft Recovery Characteristics</li> <li>• Hermetic TO-254 Package</li> <li>• Low Forward Voltage</li> <li>• High Blocking Voltage</li> <li>• Low Leakage Current</li> </ul> | <ul style="list-style-type: none"> <li>• Low Losses</li> <li>• Low Noise Switching</li> <li>• Cooler Operation</li> <li>• Higher Reliability Systems</li> <li>• Increased System Power Density</li> </ul> |

### MAXIMUM RATINGS

All Ratings:  $T_C = 25^\circ\text{C}$  unless otherwise specified.

| Symbol         | Characteristic / Test Conditions   | APT15D60C  | UNIT             |
|----------------|--|------------|------------------|
| $V_R$          | Maximum D.C. Reverse Voltage   | 600        | Volts            |
| $V_{RRM}$      | Maximum Peak Repetitive Reverse Voltage  |            |                  |
| $V_{RWM}$      | Maximum Working Peak Reverse Voltage   |            |                  |
| $I_F(AV)$      | Maximum Average Forward Current ( $T_C = 70^\circ\text{C}$ , Duty Cycle = 0.5) | 15         | Amps             |
| $I_F(RMS)$     | RMS Forward Current  | 25         |                  |
| $I_{FSM}$      | Non-Repetitive Forward Surge Current ( $T_J = 45^\circ\text{C}$ , 8.3ms)       | 110        |                  |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range  | -55 to 150 | $^\circ\text{C}$ |
| $T_L$          | Lead Temperature: 0.063" from Case for 10 Sec.                                 | 300        |                  |

### STATIC ELECTRICAL CHARACTERISTICS

| Symbol   | Characteristic / Test Conditions               | MIN | TYP | MAX  | UNIT          |
|----------|--|-----|-----|--|---------------|
| $V_F$    | Maximum Forward Voltage                        |     |     | 2.0  | Volts         |
|          |  |     |     | $I_F = 15\text{A}$                                 |               |
|          |  |     |     | $I_F = 30\text{A}$                                 |               |
| $I_{RM}$ | Maximum Reverse Leakage Current                |     |     | 1.8  | $\mu\text{A}$ |
|          |  |     |     | $I_F = 15\text{A}, T_J = 150^\circ\text{C}$        |               |
|          |  |     |     | 150  |               |
| $I_{RM}$ | Maximum Reverse Leakage Current                |     |     | 500  | $\mu\text{A}$ |
|          |  |     |     | $V_R = V_R \text{ Rated}, T_J = 125^\circ\text{C}$ |               |
| $C_T$    | Junction Capacitance, $V_R = 200\text{V}$      |     | 16  |  | pF            |
| $L_S$    | Series Inductance (Lead to Lead 5mm from Base) |     | 10  |  | nH            |

APT Website - <http://www.advancedpower.com>

USA 405 S.W. Columbia Street Bend, Oregon 97702-1035 Phone: (541) 382-8028 FAX: (541) 388-0364  
EUROPE Chemin de Magret F-33700 Merignac - France Phone: (33) 5 57 92 15 15 FAX: (33) 5 56 47 97 61

**DYNAMIC CHARACTERISTICS**

**APT15D60C**


| Symbol     | Characteristic  | MIN                 | TYP | MAX | UNIT       |
|------------|---|---------------------|-----|-----|------------|
| $t_{rr1}$  | Reverse Recovery Time, $I_F = 1.0A$ , $di_F/dt = -15A/\mu s$ , $V_R = 30V$ , $T_J = 25^\circ C$ |                     | 40  | 50  | ns         |
| $t_{rr2}$  | Reverse Recovery Time   | $T_J = 25^\circ C$  | 40  |     |            |
| $t_{rr3}$  | $I_F = 15A$ , $di_F/dt = -100A/\mu s$ , $V_R = 350V$  | $T_J = 100^\circ C$ | 80  |     |            |
| $t_{fr1}$  | Forward Recovery Time   | $T_J = 25^\circ C$  | 170 |     |            |
| $t_{fr2}$  | $I_F = 15A$ , $di_F/dt = -100A/\mu s$ , $V_R = 350V$  | $T_J = 100^\circ C$ | 170 |     |            |
| $I_{RRM1}$ | Reverse Recovery Current  | $T_J = 25^\circ C$  | 2.5 | 5   | Amps       |
| $I_{RRM2}$ | $I_F = 15A$ , $di_F/dt = -100A/\mu s$ , $V_R = 350V$  | $T_J = 100^\circ C$ | 3   | 6   |            |
| $Q_{rr1}$  | Recovery Charge   | $T_J = 25^\circ C$  | 50  |     | nC         |
| $Q_{rr2}$  | $I_F = 15A$ , $di_F/dt = -100A/\mu s$ , $V_R = 350V$  | $T_J = 100^\circ C$ | 120 |     |            |
| $V_{fr1}$  | Forward Recovery Voltage  | $T_J = 25^\circ C$  | 2.2 |     | Volts      |
| $V_{fr2}$  | $I_F = 15A$ , $di_F/dt = -100A/\mu s$ , $V_R = 350V$  | $T_J = 100^\circ C$ | 2.2 |     |            |
| $diM/dt$   | Rate of Fall of Recovery Current  | $T_J = 25^\circ C$  | 200 |     | A/ $\mu s$ |
|            | $I_F = 15A$ , $di_F/dt = -100A/\mu s$ , $V_R = 350V$  | $T_J = 100^\circ C$ | 100 |     |            |

**THERMAL AND MECHANICAL CHARACTERISTICS**

| Symbol          | Characteristic / Test Conditions       | MIN | TYP  | MAX | UNIT         |
|-----------------|--|-----|------|-----|--------------|
| $R_{\theta JC}$ | Junction-to-Case Thermal Resistance    |     |      | 2.6 | $^\circ C/W$ |
| $R_{\theta JA}$ | Junction-to-Ambient Thermal Resistance |     |      | 80  |              |
| $W_T$           | Package Weight                         |     | 0.16 |     | oz           |
|                 |  |     | 4.4  |     | gm           |

APT Reserves the right to change, without notice, the specifications and information contained herein.

**TO-254 Package Outline**

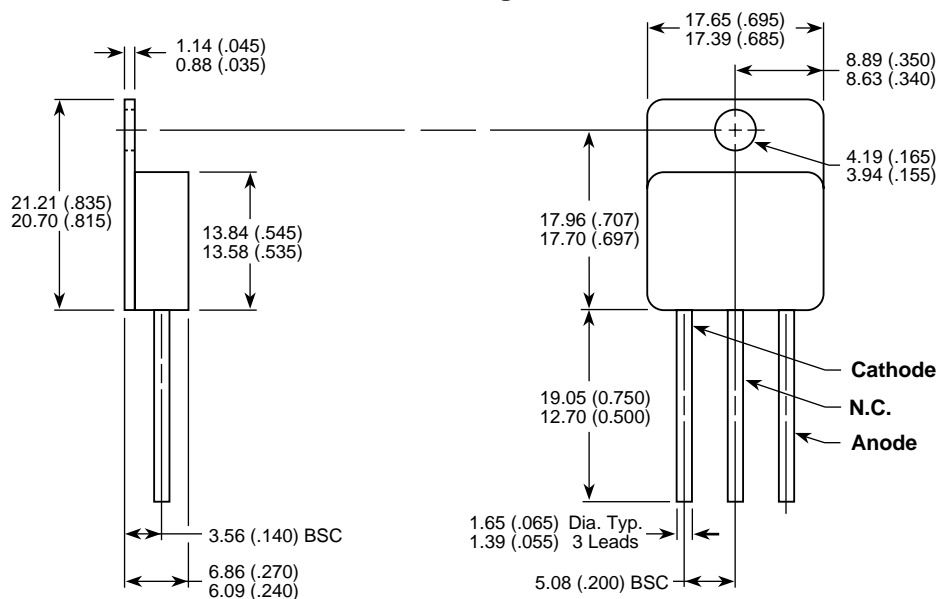

Dimensions in Millimeters and (Inches)

APT's devices are covered by one or more of the following U.S. patents: 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336  
5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058