


### Power Inductors / Wire Wound type

Series : **P**  
Type : **ELLATP**



#### Features

- Magnetic shielded structure
- Low DC resistance and large current capability
- Available on tape and reel for automatic insertion
- The new version of ELLATV serie
- RoHS compliant

#### Recommended Applications

- Audiovisual equipment, Appliance, Office automation equipment, Amusement machine, Power circuit for electric device


#### Standard Packing Quantity

- 500 pcs./reel


#### As for Soldering Conditions and Safety Precautions,

Please see Data Files


#### Explanation of Part Numbers

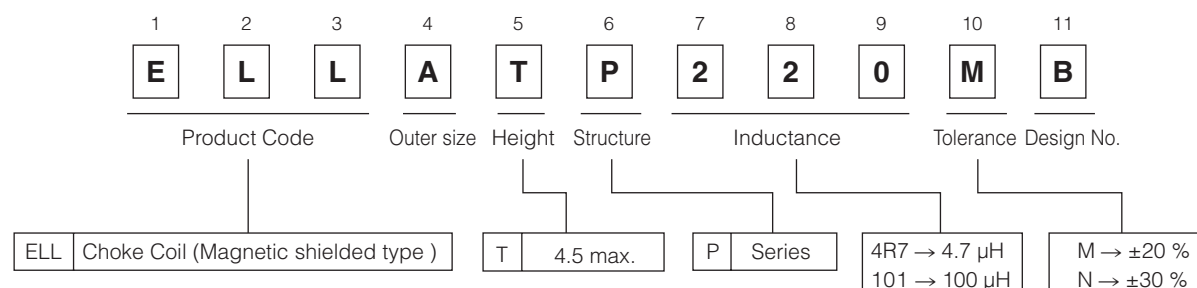

#### Dimensions in mm (not to scale)

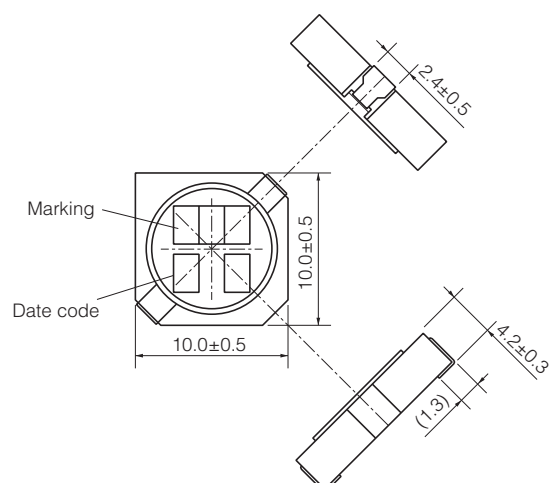

#### Recommended land patterns in mm (not to scale)

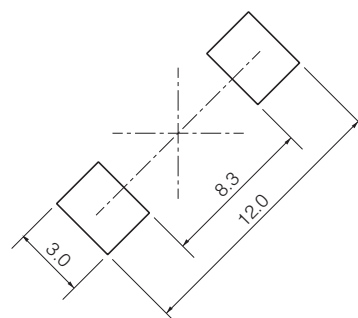


## Standard Parts

Part No.	Inductance (100 kHz)		R <sub>DC</sub> (at 20 °C)		Saturation Rated Current*1 (mA max.)	Temperature Rise Current*2 (mA max.)	Marking
	(μH)	Tol.	(mΩ)	Tol.			
ELLATP1R0NB	1.0	±30 %	3.6	±30 %	9000	8000	1R0
ELLATP1R5NB	1.5		4.4		8000	7000	1R5
ELLATP2R7NB	2.7		6.4		5500	6500	2R7
ELLATP3R3NB	3.3		7.5		5350	5500	3R3
ELLATP4R7NB	4.7		9.1		4500	5000	4R7
ELLATP5R1NB	5.1		12		4350	4500	5R1
ELLATP6R8NB	6.8		15		4000	4000	6R8
ELLATP8R2NB	8.2		18		3700	3700	8R2
ELLATP100MB	10.0	±20 %	22	±20 %	3300	3300	100
ELLATP120MB	12.0		25		2900	2900	120
ELLATP150MB	15.0		29		2700	2700	150
ELLATP220MB	22.0		38		2200	2500	220
ELLATP270MB	27.0		47		1900	2200	270
ELLATP330MB	33.0		59		1800	2000	330
ELLATP390MB	39.0		66		1600	1800	390
ELLATP470MB	47.0		80		1500	1700	470
ELLATP680MB	68.0		120		1100	1400	680
ELLATP820MB	82.0		140		1050	1300	820
ELLATP101MB	100.0		180		1000	1200	101
ELLATP121MB	120.0		200		900	1000	121
ELLATP151MB	150.0		250		780	900	151
ELLATP181MB	180.0		320		750	750	181
ELLATP221MB	220.0		360		700	700	221
ELLATP331MB	330.0		550		550	600	331
ELLATP471MB	470.0		780		470	500	471
ELLATP681MB	680.0		1150		380	450	681
ELLATP102MB	1000.0		1700		310	370	102

\*1 Saturation Rated Current : This DC current which causes a 30% inductance reduction from its nominal value.

\*2 Temperature Rise Current : This indicates the value of current when temperature rise  $\Delta t/t = 40$  °C (at 20 °C).

## Embossed Carrier Tape Dimensions in mm (not to scale)

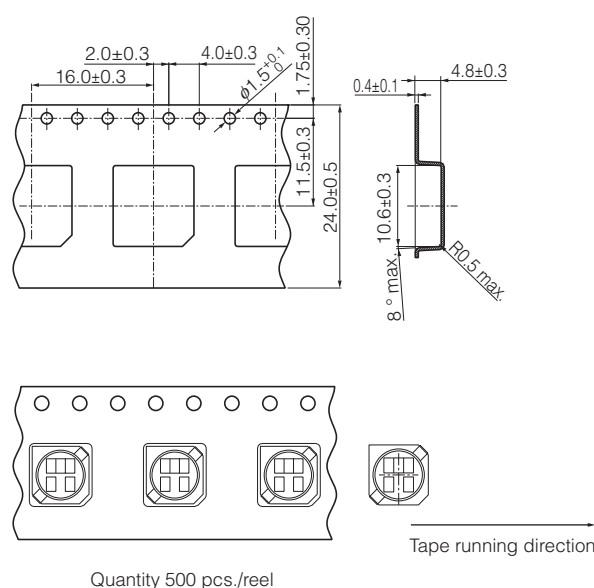

## **Guidelines and precautions regarding the technical information and use of our products described in this online catalog.**

- If you want to use our products described in this online catalog for applications requiring special qualities or reliability, or for applications where the failure or malfunction of the products may directly jeopardize human life or potentially cause personal injury (e.g. aircraft and aerospace equipment, traffic and transportation equipment, combustion equipment, medical equipment, accident prevention, anti-crime equipment, and/or safety equipment), it is necessary to verify whether the specifications of our products fit to such applications. Please ensure that you will ask and check with our inquiry desk as to whether the specifications of our products fit to such applications use before you use our products.
- The quality and performance of our products as described in this online catalog only apply to our products when used in isolation. Therefore, please ensure you evaluate and verify our products under the specific circumstances in which our products are assembled in your own products and in which our products will actually be used.
- If you use our products in equipment that requires a high degree of reliability, regardless of the application, it is recommended that you set up protection circuits and redundancy circuits in order to ensure safety of your equipment.
- The products and product specifications described in this online catalog are subject to change for improvement without prior notice. Therefore, please be sure to request and confirm the latest product specifications which explain the specifications of our products in detail, before you finalize the design of your applications, purchase, or use our products.
- The technical information in this online catalog provides examples of our products' typical operations and application circuits. We do not guarantee the non-infringement of third party's intellectual property rights and we do not grant any license, right, or interest in our intellectual property.
- If any of our products, product specifications and/or technical information in this online catalog is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially with regard to security and export control, shall be observed.

## **<Regarding the Certificate of Compliance with the EU RoHS Directive/REACH Regulations>**

- The switchover date for compliance with the RoHS Directive/REACH Regulations varies depending on the part number or series of our products.
- When you use the inventory of our products for which it is unclear whether those products are compliant with the RoHS Directive/REACH Regulation, please select "Sales Inquiry" in the website inquiry form and contact us.

**We do not take any responsibility for the use of our products outside the scope of the specifications, descriptions, guidelines and precautions described in this online catalog.**