



SANYO SEMICONDUCTOR

STK-0060II

STK-0060II - Thick Film Hybrid Integrated Circuit
Output Stage of 60W min. AF Power Amplifier (DPP)

Features

- IMST system
- Dual power supply
- Darlington pure complementary circuit
- This same pin assignment and pin interval lead to standardize a printed board.
- Metal substrate used IMST^C makes good thermal stability.
- Able to design freely previous section of power amplifier. This leads tone control designing.

Maximum Ratings at Ta=25°C

Maximum Supply Voltage	V _{CCmax}	±55	V
Thermal Resistance	θ _{j-c} ideal state	1.3	°C/W
Collector Current	I _C	8	A
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-30 to +105	°C
Allowable Load Shorting Time	t _s	V _{CC} =±41V*, R _L =8 ohm, P _O =60 W, f=50Hz	1 sec

*: Use an appointed transformer


Recommended Operation Condition at Ta=25°C

Recommended Supply Voltage	V _{CC}	±41	V
Load Resistance	R _L	8	ohm

Operation Characteristics at Ta=25°C, V_{CC}=±39V, R_L=8 ohm, R_g=600



ohm, VG=36.7dB at the appointed test circuit	min	typ	max	unit
Quiescent Current I _{cco} V _{CC} =±48V	20	40	70	mA
Output Power P _O THD=0.01%, f=20 to 20k Hz	60			W
Total Harmonic Distortion THD1 P _O =60W, f=20 to 20k Hz	0.005	0.01		%
" THD2 P _O =1W, f=20 to 20k Hz		0.01		%
Power Band Width PBW P _O =30W, f=50k Hz		0.05		%

The appointed transformer

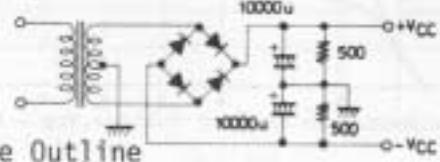

Case Outline
(unit:mm)
[4006]

Equivalent Circuit

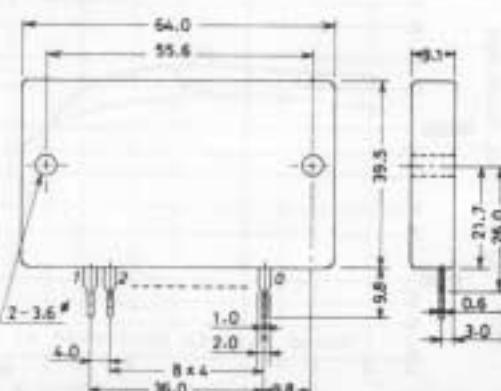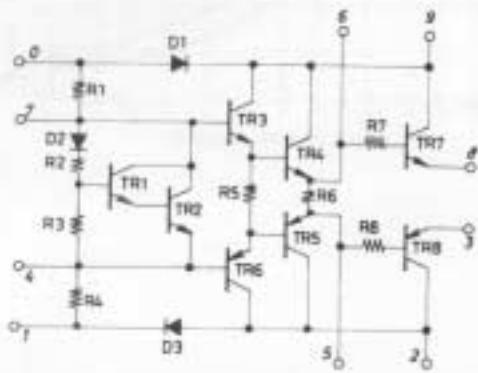

Application: 60W AF Power Amplifier using STK-0060II as an output stage

