Lucent Technologies
Bell Labs Innovations

JW030-Series Power Modules: 36 Vdc to 75 Vdc Inputs; 30 W

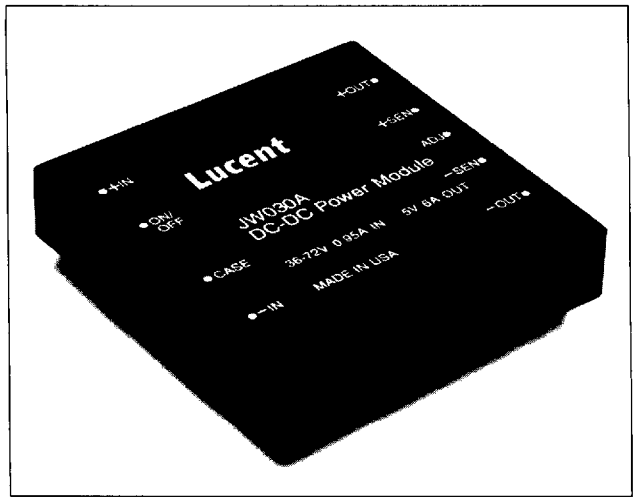

The JW030-Series Power Modules use advanced, surface-mount technology and deliver high-quality, compact, dc-dc conversion at an economical price.

Features

- Small size: 61 mm x 58 mm x 12.7 mm (2.40 in. x 2.28 in. x 0.50 in.)
- Low output noise
- Constant frequency
- Industry-standard pinout
- Metal case
- 2:1 input voltage range
- Remote sense
- Remote on/off
- High efficiency: 83% typical
- Adjustable output voltage: 80% to 110% of $V_{O, nom}$
- *UL** Recognized, *CSA*† Certified, and VDE Licensed
- Within FCC and VDE Class A Radiated Limits
- Case ground pin
- CE mark meets 73/23/EEC and 93/68/EEC directives‡

Applications

- Distributed power architectures
- Telecommunication

Options

- Choice of on/off configuration
- Short pin: 2.79 mm ± 0.25 mm (0.110 in. ± 0.010 in.)
- Heat sink available for extended operation

Description

The JW030A-M, B-M, C-M, D-M, and F-M Power Modules are dc-dc converters that operate over an input voltage range of 36 Vdc to 75 Vdc and provide precisely regulated 5 V, 12 V, 15 V, 2 V, and 3.3 V outputs, respectively. The outputs are isolated from the inputs, allowing versatile polarity configurations and grounding connections. The modules have maximum power ratings of up to 30 W at a typical full-load efficiency of up to 83%.

The power modules feature remote on/off, output sense (both negative and positive leads), and output voltage adjustment, which allows output voltage adjustment from 80% to 110% for the JW030A-M, D-M, F-M and 60% to 110% for the JW030B-M, C-M of the nominal output voltage. For disk-drive applications, the JW030 B-M Power Module provides a motor-start surge current of 3 A. The modules are PC board-mountable and encapsulated in metal cases. The modules are rated to full load at 100 °C case temperature. No external filtering is required.

* *UL* is a registered trademark of Underwriters Laboratories, Inc.
† *CSA* is a registered trademark of Canadian Standards Association.
‡ This product is intended for integration into end-use equipment. All the required procedures for CE marking of end-use equipment should be followed. (The CE mark is placed on selected products.)

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
Input Voltage Continuous	V_I	—	80	V
I/O Isolation Voltage: dc Transient (1 minute)	 — —	 — —	 500 1050	 V V
Operating Case Temperature	T_C	–40	100	°C
Storage Temperature	T_{stg}	–40	110	°C

Electrical Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, resistive load, and temperature conditions.

Table 1. Input Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Operating Input Voltage	V_I	36	48	75	Vdc
Maximum Input Current (V_I = 0 V to 75 V; I_O = $I_{O, max}$; see Figure 1.)	$I_{I, max}$	—	—	1.6	A
Inrush Transient	i^2t	—	—	0.2	A^2s
Input Reflected-ripple Current, Peak-to-peak (5 Hz to 20 MHz, 12 µH source impedance; T_C = 25 °C; see Figure 16 and Design Considerations section.)	—	—	25	—	mAp-p
Input Ripple Rejection (120 Hz)	—	—	50	—	dB

Fusing Considerations

CAUTION: This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of a sophisticated power architecture. To preserve maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The safety agencies require a normal-blow, dc fuse with a maximum rating of 5 A (see Safety Considerations section). Based on the information provided in this data sheet on inrush energy and maximum dc input current, the same type of fuse with a lower rating can be used. Refer to the fuse manufacturer's data for further information.

0050026 0025205 681

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Electrical Specifications (continued)

Table 2. Output Specifications

Parameter	Device	Symbol	Min	Typ	Max	Unit
Output Voltage (Over all operating input voltage, resistive load, and temperature conditions until end of life. See Figure 16.)	JW030A-M	V_O	4.85	—	5.15	Vdc
	JW030B-M	V_O	11.64	—	12.36	Vdc
	JW030C-M	V_O	14.55	—	15.45	Vdc
	JW030D-M	V_O	1.90	—	2.10	Vdc
	JW030F-M	V_O	3.15	—	3.45	Vdc
Output Voltage Set Point (V_I = 48 V; I_O = $I_{O,max}$; T_C = 25 °C)	JW030A-M	$V_{O,set}$	4.95	5.0	5.05	Vdc
	JW030B-M	$V_{O,set}$	11.82	12.0	12.18	Vdc
	JW030C-M	$V_{O,set}$	14.77	15.0	15.23	Vdc
	JW030D-M	$V_{O,set}$	1.96	2.0	2.04	Vdc
	JW030F-M	$V_{O,set}$	3.24	—	3.37	Vdc
Output Regulation:						
Line (V_I = 36 V to 75 V)	All	—	—	0.01	0.1	%
Load (I_O = $I_{O,min}$ to $I_{O,max}$)	All	—	—	0.05	0.2	%
Temperature (See Figure 2.)	JW030A-M, B-M, C-M	—	—	0.5	1.5	%
(T_C = –40 °C to +100 °C)	JW030D-M, F-M	—	—	0.75	1.5	%
Output Ripple and Noise (See Figure 17.):						
RMS	JW030A-M, D-M, F-M	—	—	—	20	mVrms
	JW030B-M, C-M	—	—	—	25	mVrms
Peak-to-peak (5 Hz to 20 MHz)	JW030A-M, D-M, F-M	—	—	—	150	mVp-p
	JW030B-M, C-M	—	—	—	200	mVp-p
Output Current (At I_O < $I_{O,min}$, the modules may exceed output ripple specifications.)	JW030A-M	I_O	0.6	—	6.0	A
	JW030B-M	I_O	0.3	—	2.5	A
	JW030B-M	$I_{O,trans}$	—	—	3.0	A
	JW030C-M	I_O	0.2	—	2.0	A
	JW030D-M, F-M	I_O	0.6	—	6.5	A
Output Current-limit Inception V_O = 90% of $V_{O,nom}$ (See Figures 3 through 7.)	JW030A-M	—	—	6.9	—	A
	JW030B-M	—	—	3.6	—	A
	JW030C-M	—	—	2.5	—	A
	JW030D-M, F-M	—	—	7.5	—	A
Output Short-circuit Current (V_O = 250 mV)	JW030A-M	—	—	8.0	9.5	A
	JW030B-M	—	—	4.0	5.5	A
	JW030C-M	—	—	3.0	4.5	A
	JW030D-M, F-M	—	—	8.0	10.0	A
Efficiency (V_I = 48 V; I_O = $I_{O,max}$; T_C = 25 °C; see Figures 8 through 12 and 16.)	JW030A-M	η	79	81	—	%
	JW030B-M, C-M	η	80	83	—	%
	JW030D-M	η	64	69	—	%
	JW030F-M	η	72	75	—	%

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Electrical Specifications (continued)

Table 2. Output Specifications (continued)

Parameter	Device	Symbol	Min	Typ	Max	Unit
Dynamic Response ($\Delta Io/\Delta t$ = 1 A/10 µs, V_I = 48 V, T_C = 25 °C; see Figures 13 and 14.): Load Change from I_o = 50% to 75% of $I_{o,max}$:						
Peak Deviation	All	—	—	2	—	$\%V_{o,set}$
Settling Time (Vo < 10% peak deviation)	All	—	—	0.5	—	ms
Load Change from I_o = 50% to 25% of $I_{o,max}$:						
Peak Deviation	All	—	—	2	—	$\%V_{o,set}$
Settling Time (Vo < 10% of peak deviation)	All	—	—	0.5	—	ms

Table 3. Isolation Specifications

Parameter	Min	Typ	Max	Unit
Isolation Capacitance	—	0.02	—	µF
Isolation Resistance	10	—	—	MΩ

General Specifications

Parameter	Min	Typ	Max	Unit
Calculated MTBF (I_o = 80% of $I_{o,max}$; T_C = 40 °C)		4,300,000		hours
Weight	—	—	113 (4.0)	g (oz.)

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Feature Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, resistive load, and temperature conditions. See Feature Descriptions and Design Considerations for further information.

Parameter	Device	Symbol	Min	Typ	Max	Unit
Remote On/Off (V_I = 36 V to 75 V; open collector or equivalent compatible; signal referenced to $V_I(-)$ terminal. See Figure 19 and Feature Descriptions.): JW030x1 Negative Logic: Logic Low—Module On Logic High—Module Off JW030x Positive Logic: Logic Low—Module Off Logic High—Module On						
Module Specifications:						
On/Off Current—Logic Low	All	$I_{on/off}$	—	—	1.0	mA
On/Off Voltage:						
Logic Low	All	$V_{on/off}$	0	—	1.2	V
Logic High ($I_{on/off}$ = 0)	All	$V_{on/off}$	—	—	6	V
Open Collector Switch Specifications:						
Leakage Current During Logic High ($V_{on/off}$ = 10 V)	All	$I_{on/off}$	—	—	50	µA
Output Low Voltage During Logic Low ($I_{on/off}$ = 1 mA)	All	$V_{on/off}$	—	—	1.2	V
Turn-on Time (@ 80% of $I_{o, max}$; T_A = 25 °C; V_o within ±1% of steady state)	All	—	—	80	150	ms
Output Voltage Overshoot (See Figure 15.)	All	—	—	0	5	%
Output Voltage Sense Range	All	—	—	—	10	$\%V_{o, nom}$
Output Voltage Set-point Adjustment Range (See Feature Descriptions.)	JW030A-M	—	80	—	110	$\%V_{o, nom}$
	JW030B-M	—	60	—	110	$\%V_{o, nom}$
	JW030C-M	—	60	—	110	$\%V_{o, nom}$
	JW030D-M	—	80	—	110	$\%V_{o, nom}$
	JW030F-M	—	80	—	110	$\%V_{o, nom}$
Output Overvoltage Clamp	JW030A-M	$V_{o, clamp}$	5.6	—	7.0	V
	JW030B-M	$V_{o, clamp}$	13.5	—	16.0	V
	JW030C-M	$V_{o, clamp}$	17.0	—	20.0	V
	JW030D-M	$V_{o, clamp}$	2.5	—	4.0	V
	JW030F-M	$V_{o, clamp}$	4.0	—	5.7	V

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Characteristic Curves

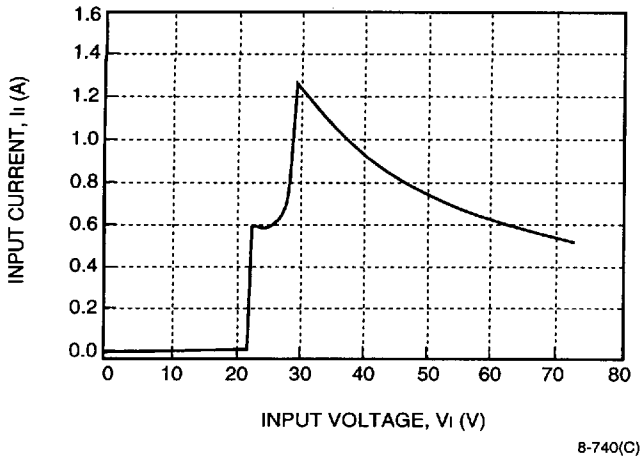

Figure 1. JW030-Series Typical Input Characteristics

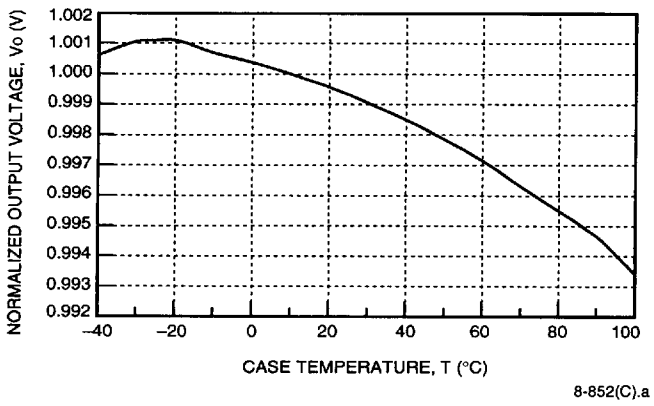

Figure 2. JW030 Family Typical Output Voltage Variation over Ambient Temperature Range

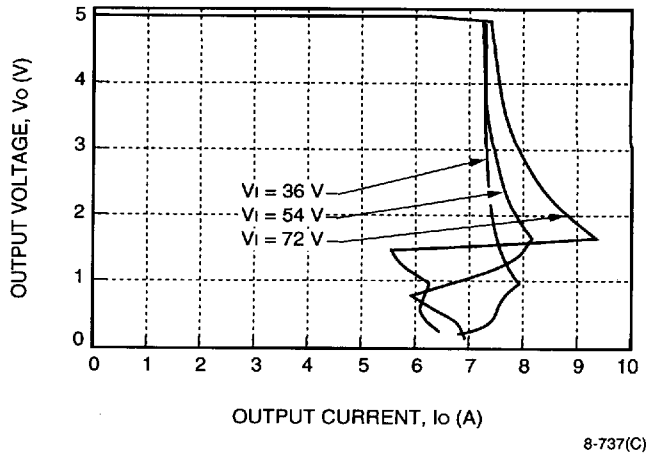

Figure 3. JW030A-M Typical Output Characteristics

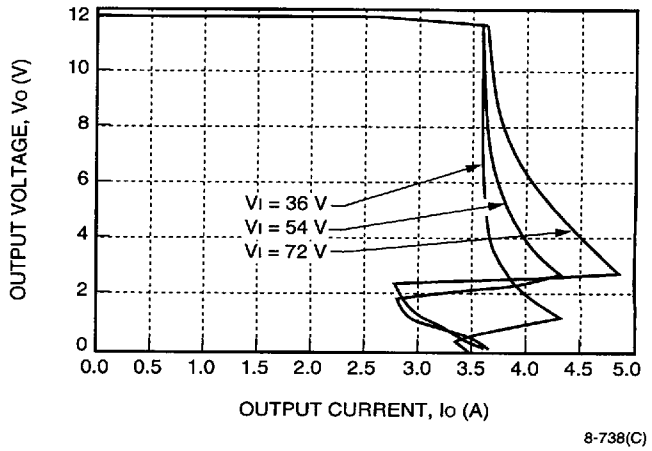

Figure 4. JW030B-M Typical Output Characteristics

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Characteristic Curves (continued)

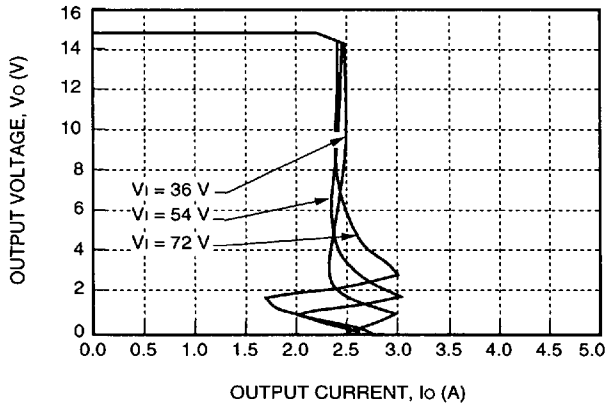

Figure 5. JW030C-M Typical Output Characteristics

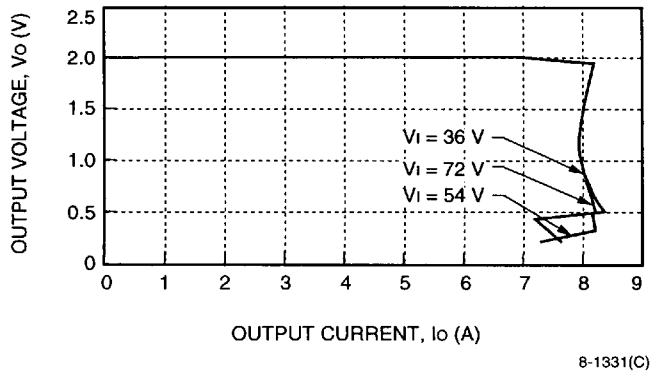

Figure 6. JW030D-M Typical Output Characteristics

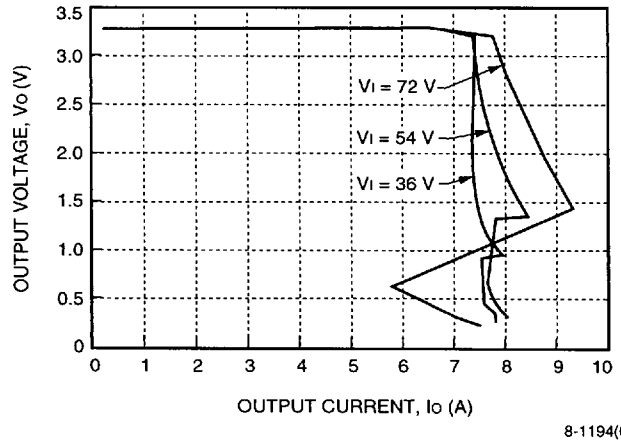

Figure 7. JW030F-M Typical Output Characteristics

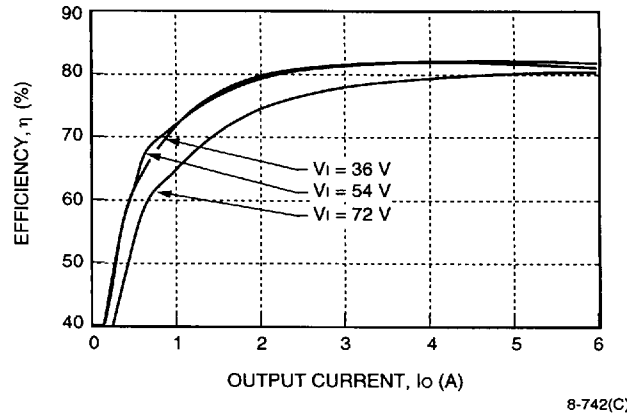

Figure 8. JW030A-M Typical Converter Efficiency vs. Output Current

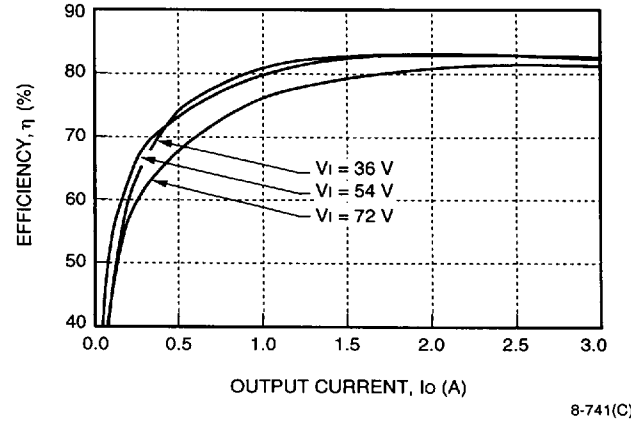

Figure 9. JW030B-M Typical Converter Efficiency vs. Output Current

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Characteristic Curves (continued)

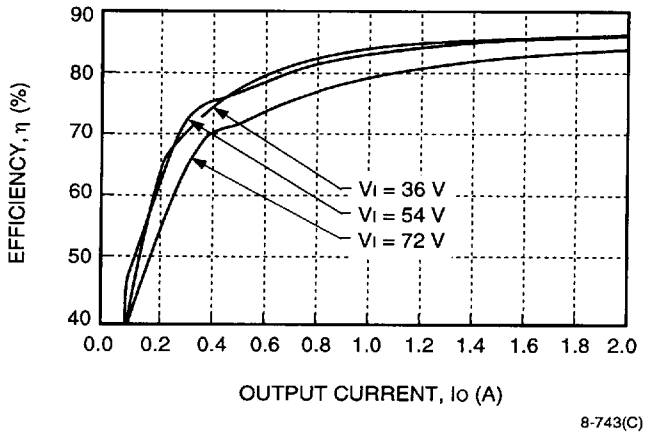

Figure 10. JW030C-M Typical Converter Efficiency vs. Output Current

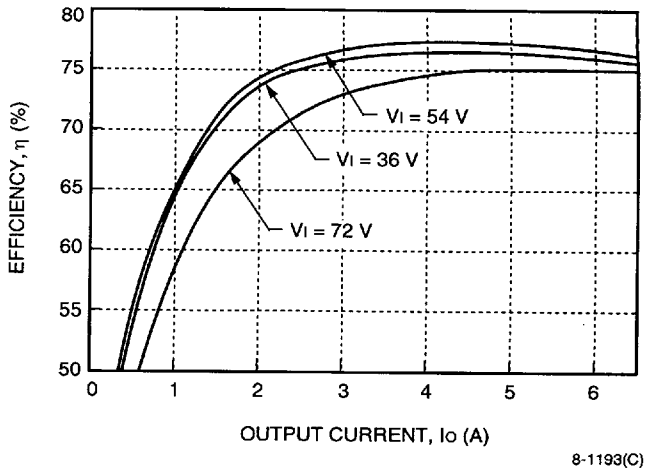

Figure 12. JW030F-M Typical Converter Efficiency vs. Output Current

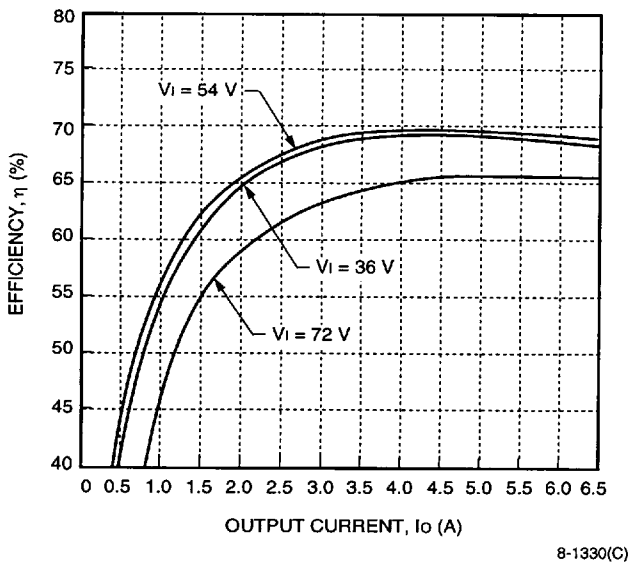

Figure 11. JW030D-M Typical Converter Efficiency vs. Output Current

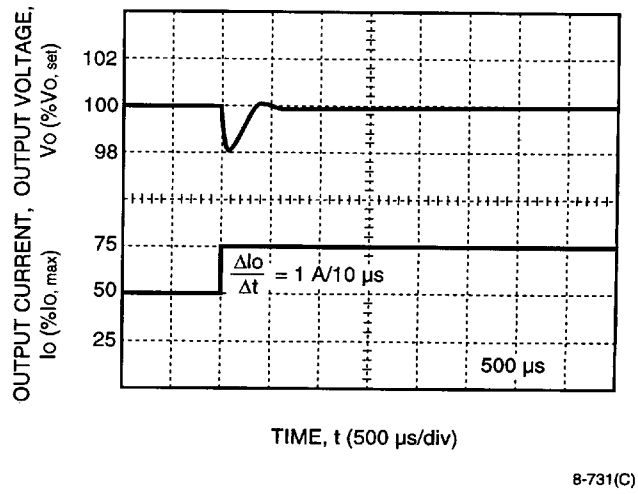

Figure 13. Typical Output Voltage for a Step Load Change from 50% to 75%

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Characteristic Curves (continued)

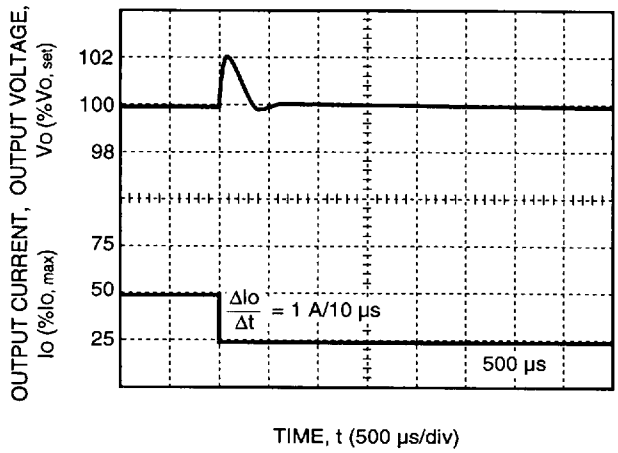

Figure 14. Typical Output Voltage for a Step Load Change from 50% to 25%

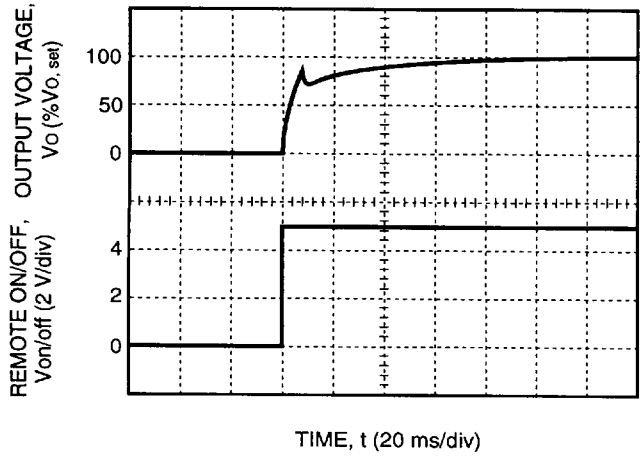

Figure 15. Typical Output Voltage Start-Up when Signal Applied to Remote On/Off

Test Configurations

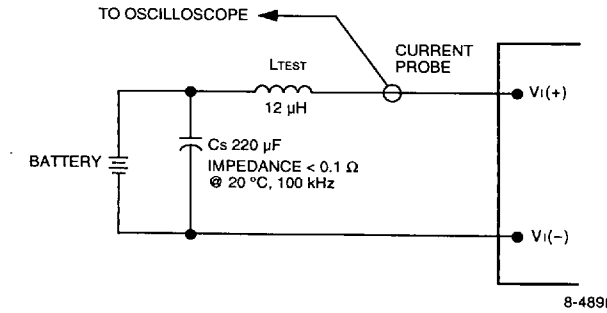

Note: Input reflected-ripple current is measured with a simulated source impedance of 12 µH. Capacitor Cs offsets possible battery impedance. Current is measured at the input of the module.

Figure 16. Input Reflected-Ripple Test Setup

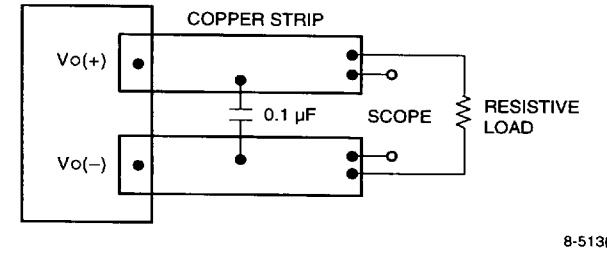

Note: Use a 0.1 µF ceramic capacitor. Scope measurement should be made using a BNC socket. Position the load between 50 mm (2 in.) and 75 mm (3 in.) from the module.

Figure 17. Peak-to-Peak Output Noise Measurement Test Setup

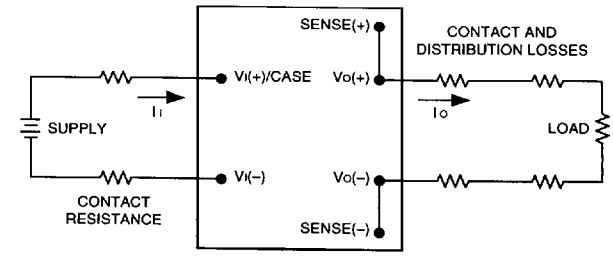

Note: All measurements are taken at the module terminals. When socketing, place Kelvin connections at module terminals to avoid measurement errors due to socket contact resistance.

$$\eta = \left(\frac{[Vo(+) - Vo(-)]\ Io}{[VI(+) - VI(-)]\ II}\right) \times 100$$

Figure 18. Output Voltage and Efficiency Measurement Test Setup

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Design Considerations

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. A 33 µF electrolytic capacitor (ESR < 0.7 Ω at 100 kHz) mounted close to the power module helps ensure stability of the unit.

Safety Considerations

For safety-agency approval of the system in which the power module is used, the power module must be installed in compliance with the spacing and separation requirements of the end-use safety agency standard, i.e., *UL*-1950, *CSA* 22.2-950, EN60950.

For the converter output to be considered meeting the requirements of safety extra-low voltage (SELV), one of the following must be true of the dc input:

- All inputs are SELV and floating with the output also floating.
- All inputs are SELV and grounded with the output also grounded.
- Any non-SELV input must be provided with reinforced insulation from any other hazardous voltages, including the ac mains, and must have a SELV reliability test performed on it in combination with the converters.

The power module has extra-low voltage (ELV) outputs when all inputs are ELV.

The input to these units is to be provided with a maximum 5 A normal-blow fuse in the ungrounded lead.

Feature Descriptions

Remote On/Off

Two remote on/off options are available. Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. Negative logic remote on/off turns the module off during a logic high and on during a logic low. Negative logic, code suffix "1," is the factory-preferred configuration.

To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the $V_{I}(-)$ terminal ($V_{on/off}$). The switch can be an open collector or equivalent (see Figure 19). A logic low is $V_{on/off}$ = 0 V to 1.2 V, during which the module is off. The maximum $I_{on/off}$ during a logic low is 1 mA. The switch should maintain a logic low voltage while sinking 1 mA.

During a logic high, the maximum $V_{on/off}$ generated by the power module is 6 V. The maximum allowable leakage current of the switch at $V_{on/off}$ = 6 V is 50 µA.

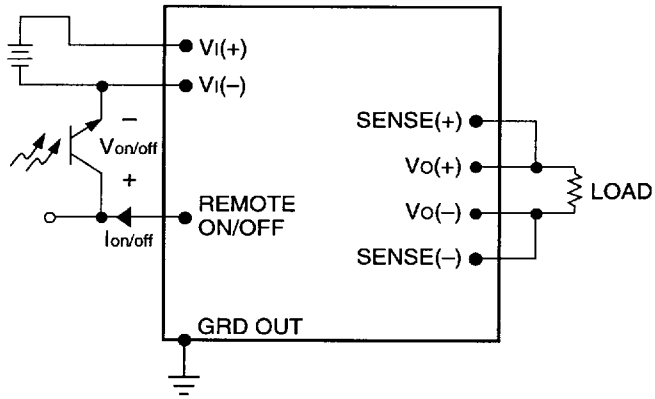

Figure 19. Remote On/Off Implementation

Output Overvoltage Clamp

The output overvoltage clamp consists of control circuitry, independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop (see Feature Specifications table). This provides a redundant voltage-control that reduces the risk of output overvoltage.

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Feature Descriptions (continued)

Output Voltage Set-Point Adjustment (Trim)

Output voltage trim allows the user to increase or decrease the output voltage set point of a module. This is accomplished by connecting an external resistor between the TRIM pin and either the SENSE(+) or SENSE(–) pins. With an external resistor between the TRIM and SENSE(–) pins ($R_{adj\text{-}down}$), the output voltage set point ($V_{O,\,adj}$) decreases (see Figure 20). The following equation determines the required external-resistor value to obtain an output voltage change of %Δ.

$$R_{adj\text{-}down} = \left(\frac{1 - \%\Delta}{\%\Delta}\right)10\ k\Omega$$

For example, to lower the output voltage by 30%, the external resistor value must be:

$$R_{adj\text{-}down} = \left(\frac{1 - 0.3}{0.3}\right)10\ k\Omega = 23.33\ k\Omega$$

With an external resistor connected between the TRIM and SENSE(+) pins ($R_{adj\text{-}up}$), the output voltage set point ($V_{O,\,adj}$) increases (see Figure 21). The following equations determine the required external-resistor value to obtain an output voltage change of %Δ.

JW030A-M, B-M, C-M:

$$R_{adj\text{-}up} = \left(\frac{V_{O,\,nom}}{2.5} - 1\right)\left(\frac{1 + \%\Delta}{\%\Delta}\right)10\ k\Omega$$

For example, to increase the output voltage of the JW030B by 5%, the external resistor value must be:

$$R_{adj\text{-}up} = \left(\frac{12.0}{2.5} - 1\right)\left(\frac{1 + 0.05}{0.05}\right)10\ k\Omega = 798\ k\Omega$$

JW030D, F:

$$R_{adj\text{-}up} = \left(\frac{V_{O,\,nom}}{1.235} - 1\right)\left(\frac{1 + \%\Delta}{\%\Delta}\right)10\ k\Omega$$

For example, to increase the output voltage of the JW030D by 5%, the external resistor must be:

$$R_{adj\text{-}up} = \left(\frac{2}{1.235} - 1\right)\left(\frac{1 + 0.05}{0.05}\right)10\ k\Omega = 130\ k\Omega$$

The combination of the output voltage adjustment and sense range and the output voltage given in the Feature Specifications table cannot exceed 110% of the nominal output voltage between the Vo(+) and Vo(–) terminals.

The JW030 Power Module family has a fixed current-limit set point. Therefore, as the output voltage is adjusted down, the available output power is reduced. In addition, the minimum output current is a function of the output voltage. As the output voltage is adjusted down, the minimum required output current can increase.

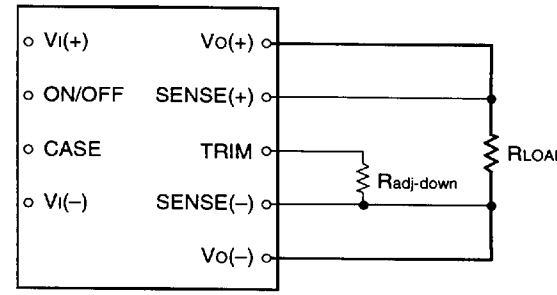

Figure 20. Circuit Configuration to Decrease Output Voltage

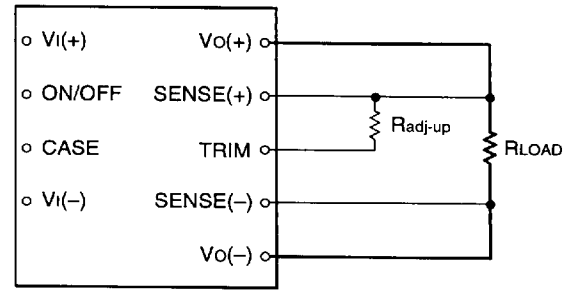

Figure 21. Circuit Configuration to Increase Output Voltage

Current Limit

To provide protection in a fault (output overload) condition, the unit is equipped with internal current-limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. If the output voltage is pulled very low during a severe fault, the current-limit circuit can exhibit either foldback or tailout characteristics (output current decrease or increase). The unit operates normally once the output current is brought back into its specified range.

0050026 0025214 694

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Thermal Considerations

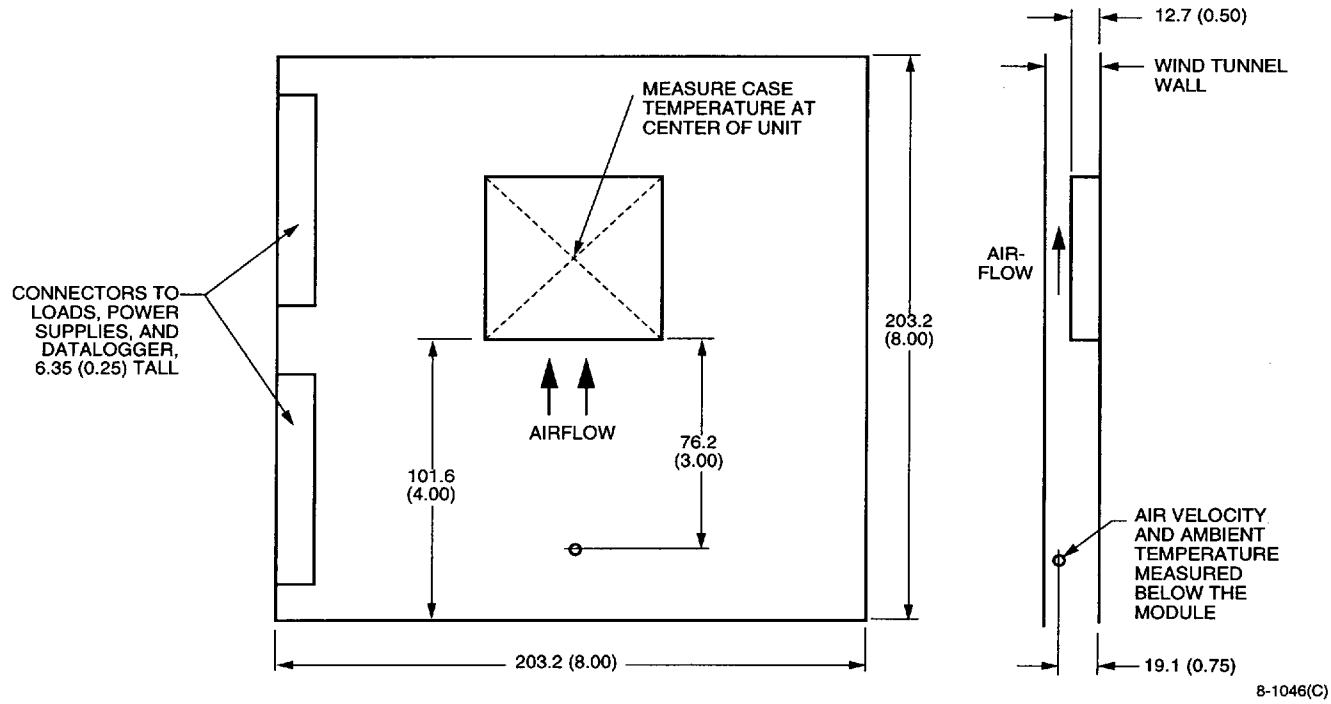

Note: Dimensions are in millimeters and (inches).

Figure 22. Thermal Test Setup

The JW030-Series Power Modules are designed to operate in a variety of thermal environments. As with any electronic component, sufficient cooling must be provided to help ensure reliable operation. Heat dissipating components inside the module are thermally coupled to the case to enable heat removal by conduction, convection, and radiation to the surrounding environment.

The thermal data presented is based on measurements taken in a wind tunnel. The test setup shown in Figure 22 was used to collect data for Figures 23 and 28.

The graphs in Figures 23 through 27 provide general guidelines for use. Actual performance can vary depending on the particular application environment. The maximum case temperature of 100 °C must not be exceeded.

Basic Thermal Performance

The JW030-Series is constructed with a specially designed, heat spreading enclosure. As a result, full-load operation in natural convection at 50 °C can be achieved without the use of an external heat sink.

Higher ambient temperatures can be sustained by increasing the airflow or by adding a heat sink. As stated, this data is based on a maximum case temperature of 100 °C and measured in the test configuration shown in Figure 22.

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Thermal Considerations (continued)

Forced Convection Cooling

To determine the necessary airflow, determine the power dissipated by the unit for the particular application. Figures 23 through 27 show typical power dissipation for these power modules over a range of output currents. With the known power dissipation and a given local ambient temperature, the appropriate airflow can be chosen from the derating curves in Figure 28. For example, if the unit dissipates 6.2 W, the minimum airflow in a 80 °C environment is 1 ms^{-1} (200 ft./min.)

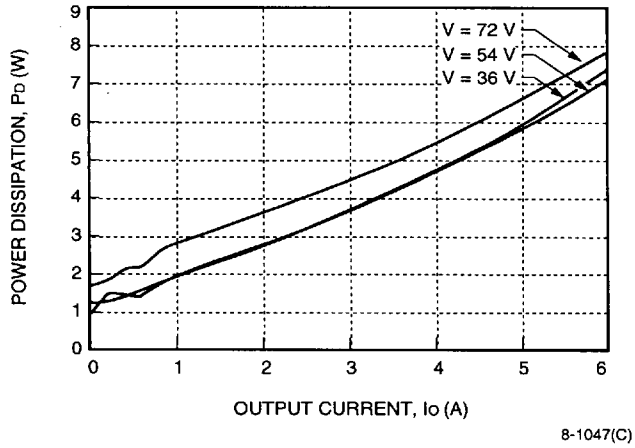

Figure 23. JW030A-M Power Dissipation vs. Output Current

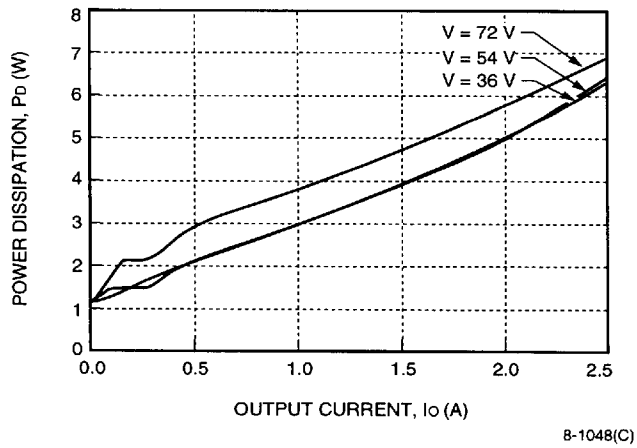

Figure 24. JW030B-M Power Dissipation vs. Output Current

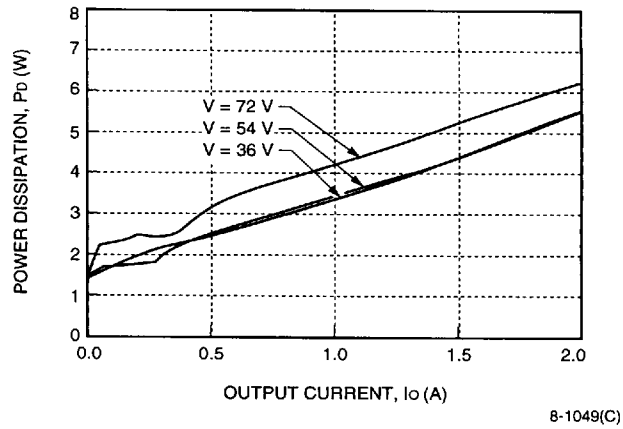

Figure 25. JW030C-M Power Dissipation vs. Output Current

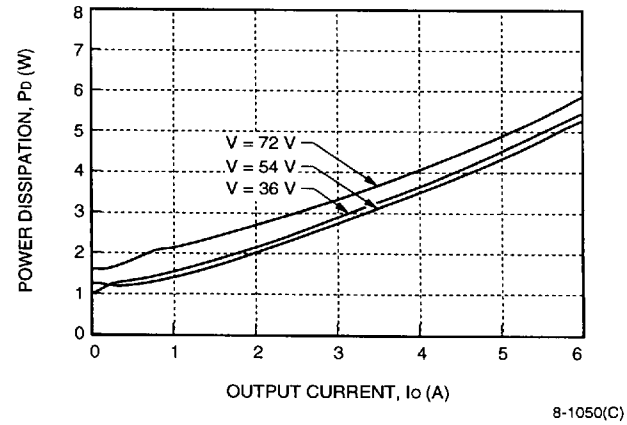

Figure 26. JW030D-M Power Dissipation vs. Output Current

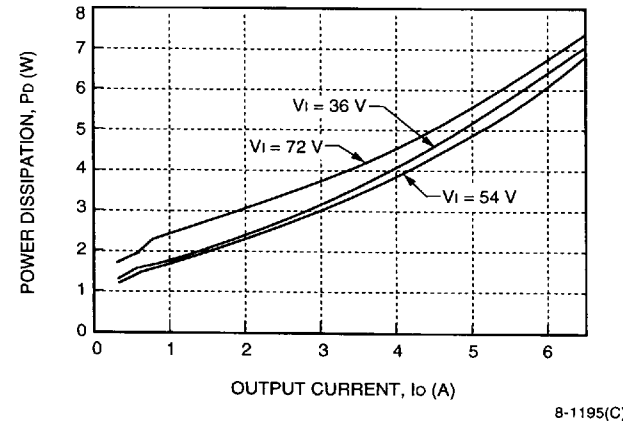

Figure 27. JW030F-M Power Dissipation vs. Output Current

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Thermal Considerations (continued)

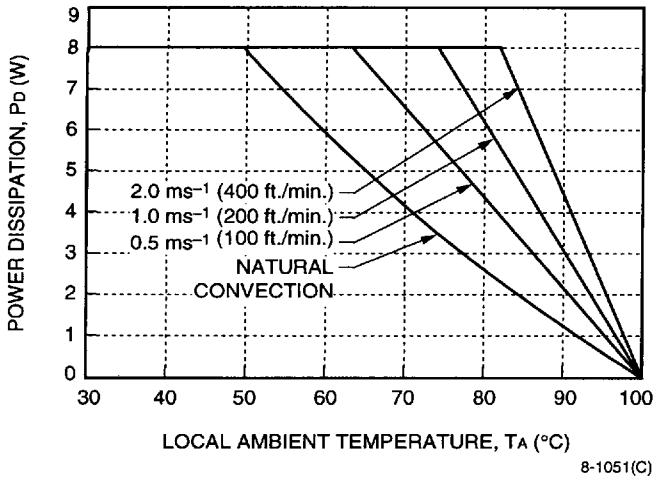

Figure 28. Forced Convection Power Derating with No Heat Sink; Either Orientation

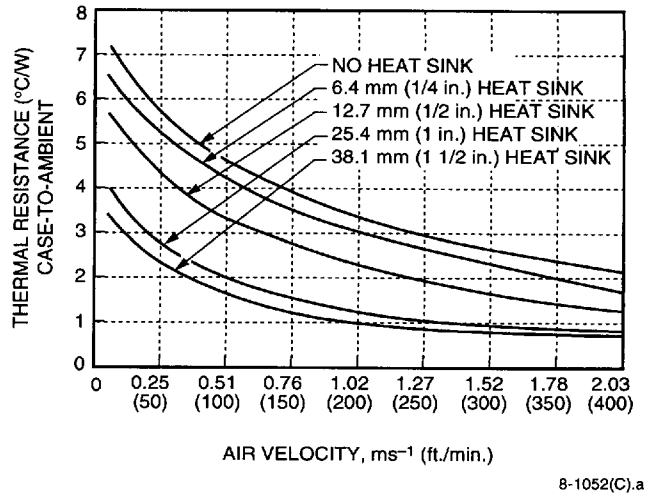

Figure 29. Case-to-Ambient Thermal Resistance vs. Air Velocity Curves; Either Orientation

Heat Sink Selection

Several heat sinks are available for these modules. The case includes through-threaded mounting holes allowing attachment of heat sinks or cold plates from either side of the module. The mounting torque must not exceed 5 in./lb. (0.56 N/m).

Figure 29 shows the case-to-ambient thermal resistance, θ (°C/W), for these modules. These curves can be used to predict which heat sink will be needed for a particular environment. For example, if the unit dissipates 7 W of heat in an 80 °C environment with an airflow of 0.7 ms^{-1} (130 ft./min.), the minimum heat sink required can be determined as follows:

$$\theta \leq (T_{C,max} - T_A)/P_D$$

where:

θ = module's total thermal resistance
$T_{C,max}$ = case temperature (See Figure 22.)
T_A = inlet ambient temperature (See Figure 22.)
P_D = power dissipation

$\theta \leq (100 - 80)/7$
$\theta \leq 2.9$ °C/W

From Figure 29, the 1/2 in. high heat sink or greater is required.

Although the previous example uses 100 °C as the maximum case temperature, for extremely high reliability applications, one can use a lower temperature for $T_{C,max}$.

It is important to point out that the thermal resistances shown in Figure 29 are for heat transfer from the sides and bottom of the module as well as the top side with the attached heat sink; therefore, the case-to-ambient thermal resistances shown will generally be lower than the resistance of the heat sink by itself. The data in Figure 29 was taken with a thermally conductive dry pad between the case and the heat sink to minimize contact resistance (typically 0.1 °C/W to 0.3 °C/W).

For a more detailed explanation of thermal energy management for this series of power modules as well as more details on available heat sinks, please request the following technical note: *Thermal Energy Management for JC- and JW-Series 30 Watt Board-Mounted Power Modules.*

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Outline Diagram

Dimensions are in millimeters and (inches).

Copper paths must not be routed beneath the power module standoffs.

Tolerances: x.x ± 0.5 mm (0.02 in.), x.xx ± 0.25 mm (0.010 in.).

Top View

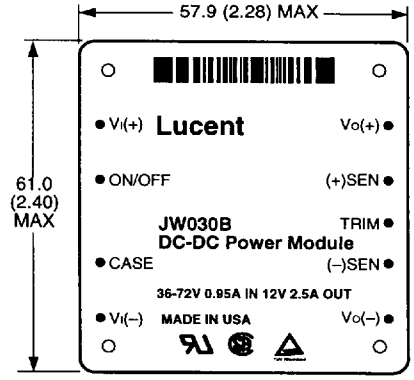

Side View

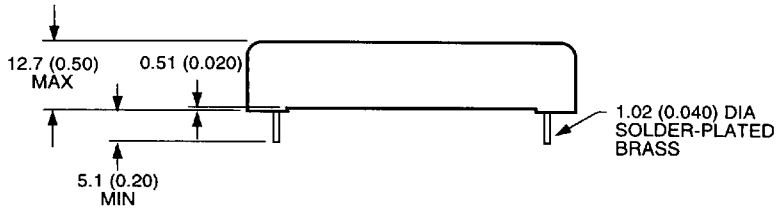

Bottom View

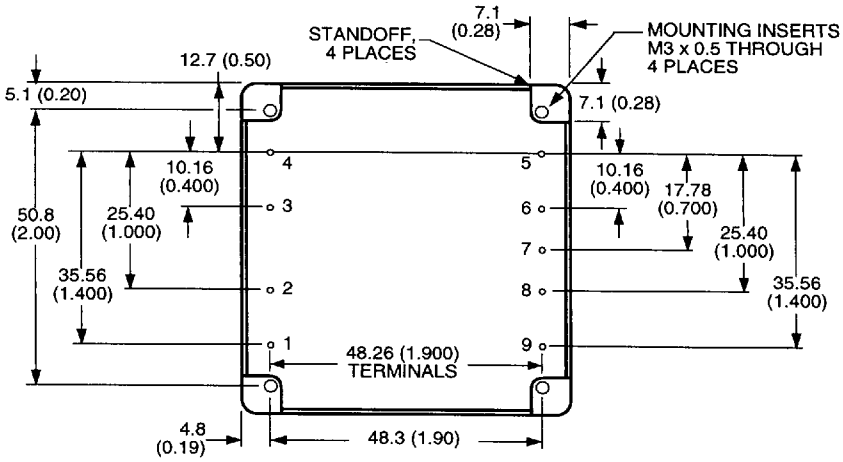

8-716(C)

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Recommended Hole Pattern

Component-side footprint.

Dimensions are in millimeters and (inches).

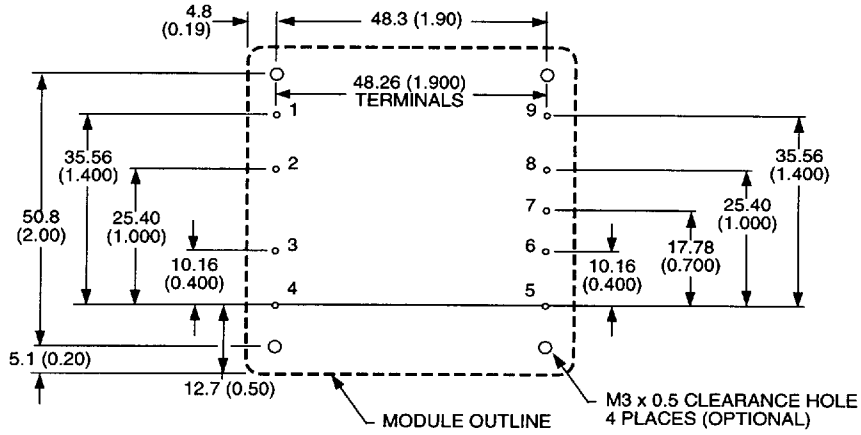

8-716(C)

Ordering Information

For assistance in ordering options, please contact your Microelectronics Group Account Manager or Application Engineer.

Input Voltage	Output Voltage	Output Power	Remote On/ Off Logic	Device Code	Comcode
48 V	5 V	30 W	positive	JW030A-M	107584278
48 V	12 V	30 W	positive	JW030B-M	107587800
48 V	15 V	30 W	positive	JW030C-M	107587826
48 V	2 V	13 W	positive	JW030D-M	107587842
48 V	3.3 V	21.5 W	positive	JW030F-M	107600546
48 V	5 V	30 W	negative	JW030A1-M	107587776
48 V	12 V	30 W	negative	JW030B1-M	107587818
48 V	15 V	30 W	negative	JW030C1-M	107587834
48 V	2 V	13 W	negative	JW030D1-M	107670259
48 V	3.3 V	21.5 W	negative	JW030F1-M	107587859

For additional information, contact your Microelectronics Group Account Manager or the following:
INTERNET: **http://www.lucent.com/micro**
U.S.A.: Microelectronics Group, Lucent Technologies Inc., 555 Union Boulevard, Room 30L-15P-BA, Allentown, PA 18103
1-800-372-2447, FAX 610-712-4106 (In CANADA: **1-800-553-2448**, FAX 610-712-4106), e-mail **docmaster@micro.lucent.com**
ASIA PACIFIC: Microelectronics Group, Lucent Technologies Singapore Pte. Ltd., 77 Science Park Drive, #03-18 Cintech III, Singapore 118256
Tel. (65) 778 8833, FAX (65) 777 7495
JAPAN: Microelectronics Group, Lucent Technologies Japan Ltd., 7-18, Higashi-Gotanda 2-chome, Shinagawa-ku, Tokyo 141, Japan
Tel. (81) 3 5421 1600, FAX (81) 3 5421 1700
For data requests in Europe:
MICROELECTRONICS GROUP DATALINE: **Tel. (44) 1734 324 299**, FAX (44) 1734 328 148
For technical inquiries in Europe:
CENTRAL EUROPE: **(49) 89 95086 0** (Munich), NORTHERN EUROPE: **(44) 1344 865 900** (Bracknell UK),
FRANCE: **(33) 1 41 45 77 00** (Paris), SOUTHERN EUROPE: **(39) 2 6601 1800** (Milan) or **(34) 1 807 1700** (Madrid)

Lucent Technologies Inc. reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Copyright © 1997 Lucent Technologies Inc.
All Rights Reserved
Printed in U.S.A.

March 1997
DS97-135EPS (Replaces DS96-052EPS)
0050026 0025219 176

Printed On
Recycled Paper

microelectronics group
Lucent Technologies
Bell Labs Innovations

66594 16

Powered by ICminer.com Electronic-Library Service CopyRight 2003