


# Flyback Transformer

## APC44002S




### ELECTRICAL SPECIFICATIONS @ 25° C

Turns Ratio (Pri : Sec1 : Sec2 : Sec3)	Primary Inductance uH min	Leakage Inductance uH max	Pri DCR mOhm max	Sec1 DCR mOhm max	Sec2 DCR mOhm max	Sec3 DCR Ohm max
1 : 0.4 : 1.66 : 3.27	30.0	1.0	80	25	600	1.2

### SCHEMATIC

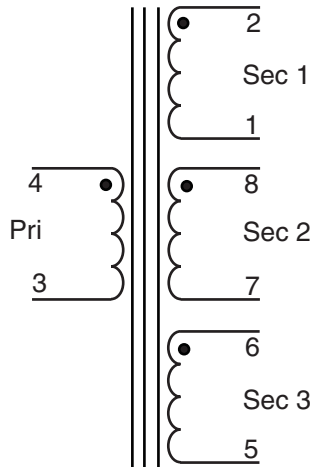

### MECHANICAL

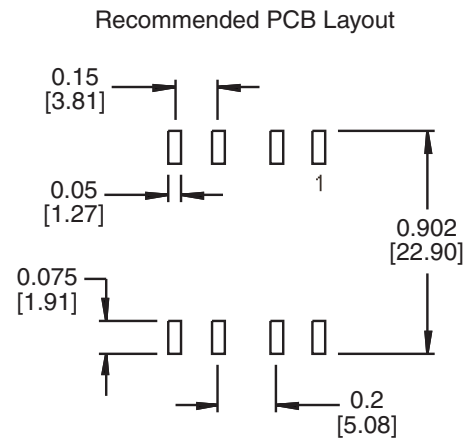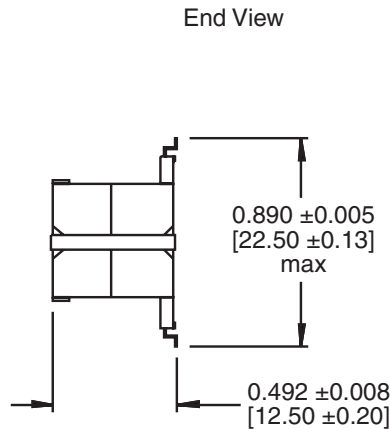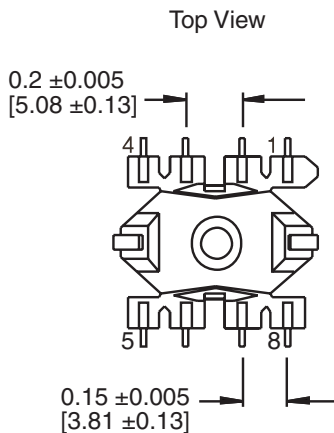

©2003 Bel Fuse Inc. Specifications subject to change without notice. 06.23.03

#### CORPORATE

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
www.belfuse.com

#### FAR EAST

Bel Fuse Ltd.  
8F / 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
www.belfuse.com

#### EUROPE

Bel Stewart Connector  
45/46 Riverside  
Medway City Estate  
Rochester, Kent ME2 4DP U.K.  
Tel 44-1634-722890  
Fax 44-1634-716677  
www.belfuse.com