

F-43-25

**MAXIMUM RATINGS**

Rating	Symbol	MPQ6100 MPQ6600	MPQ6100A MPQ6600A	Unit
Collector-Emitter Voltage	V <sub>CEO</sub>	40	45	Vdc
Collector-Base Voltage	V <sub>CBO</sub>	60		Vdc
Emitter-Base Voltage	V <sub>EBO</sub>	5.0		Vdc
Collector Current — Continuous	I <sub>C</sub>	50		mA <sub>dc</sub>
		Each Transistor	Four Transistors Equal Power	
Total Device Dissipation @ T <sub>A</sub> = 25°C Derate above 25°C	P <sub>D</sub>	500 4.0	900 7.2	mW mW/°C
Total Device Dissipation @ T <sub>C</sub> = 25°C Derate above 25°C	P <sub>D</sub>	0.825 6.7	2.4 19.2	Watts mW/°C
Operating and Storage Junction Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150		°C

**THERMAL CHARACTERISTICS**

Characteristic	Junction to Case	Junction to Ambient	Unit
Thermal Resistance(1) Each Die	151	250	°C/W
Effective, 4 Die	52	139	°C/W
Coupling Factors Q1-Q4 or Q2-Q3	34	70	%
Q1-Q2 or Q3-Q4	2.0	26	%

(1) R<sub>θJA</sub> is measured with the device soldered into a typical printed circuit board.

**ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted.)**

Characteristic	Symbol	Min	Typ	Max	Unit
<b>OFF CHARACTERISTICS</b>					
Collector-Emitter Breakdown Voltage(2) (I <sub>C</sub> = 10 mA <sub>dc</sub> , I <sub>B</sub> = 0)	V <sub>(BR)CEO</sub>	40 45	—	—	Vdc
Collector-Base Breakdown Voltage (I <sub>C</sub> = 10 μA <sub>dc</sub> , I <sub>E</sub> = 0)	V <sub>(BR)CBO</sub>	60	—	—	Vdc
Emitter-Base Breakdown Voltage (I <sub>E</sub> = 10 μA <sub>dc</sub> , I <sub>C</sub> = 0)	V <sub>(BR)EBO</sub>	5.0	—	—	Vdc
Collector Cutoff Current (V <sub>CB</sub> = 50 Vdc, I <sub>E</sub> = 0)	I <sub>CBO</sub>	—	—	10	nA <sub>dc</sub>
<b>ON CHARACTERISTICS(2)</b>					
DC Current Gain (I <sub>C</sub> = 100 μA <sub>dc</sub> , V <sub>CE</sub> = 5.0 Vdc)	h <sub>FE</sub>	50 100	—	—	—
(I <sub>C</sub> = 500 μA <sub>dc</sub> , V <sub>CE</sub> = 5.0 Vdc)		75 150	—	—	
(I <sub>C</sub> = 1.0 mA <sub>dc</sub> , V <sub>CE</sub> = 5.0 Vdc)		75 150	—	—	
(I <sub>C</sub> = 10 mA <sub>dc</sub> , V <sub>CE</sub> = 5.0 Vdc)		60 125	—	—	
Collector-Emitter Saturation Voltage (I <sub>C</sub> = 1.0 mA <sub>dc</sub> , I <sub>B</sub> = 100 μA <sub>dc</sub> )	V <sub>CE(sat)</sub>	—	—	0.25	Vdc
Base-Emitter Saturation Voltage (I <sub>C</sub> = 1.0 mA <sub>dc</sub> , I <sub>B</sub> = 100 μA <sub>dc</sub> )	V <sub>BE(sat)</sub>	—	—	0.8	Vdc
<b>SMALL-SIGNAL CHARACTERISTICS</b>					
Current-Gain — Bandwidth Product (I <sub>C</sub> = 500 μA <sub>dc</sub> , V <sub>CE</sub> = 5.0 Vdc, f = 20 MHz)	f <sub>T</sub>	50	—	—	MHz
Output Capacitance (V <sub>CB</sub> = 5.0 Vdc, I <sub>E</sub> = 0, f = 100 kHz)	C <sub>obo</sub>	—	1.2 1.8	4.0 4.0	pF

**MPQ6100, A**  
STYLE 1  
**MPQ6600, A**  
STYLE 2  
CASE 646-06  
TO-116

**QUAD COMPLEMENTARY PAIR TRANSISTORS**  
NPN/PNP SILICON

Refer to MHQ2483 for NPN Curves.  
Refer to MHQ3798 for PNP Curves.

MPQ6100, A, MPQ6600, A

T-43-25


**ELECTRICAL CHARACTERISTICS** (continued) ( $T_A = 25^\circ\text{C}$  unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
Input Capacitance ( $V_{BE} = 0.5\text{ Vdc}$ , $I_C = 0$ , $f = 100\text{ kHz}$ )	C <sub>ibo</sub>	—	—	8.0	pF
		—	—	8.0	
Noise Figure ( $I_C = 100\ \mu\text{A}$ , $V_{CE} = 5.0\text{ Vdc}$ , $R_S = 10\text{ kohms}$ , $f = 10\text{ Hz to }15.7\text{ kHz}$ , $BW = 10\text{ kHz}$ )	NF	—	4.0	—	dB
		—	—	—	

(2) Pulse Test: Pulse Width  $\leq 300\ \mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .



T-91-20

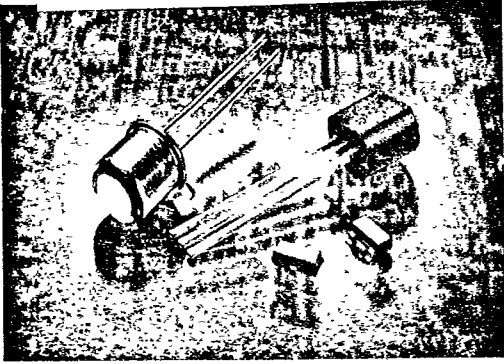

The following pages contain information on the various packages referenced on the individual data sheets. Information includes: a picture of the package, dimensions in both millimeters and inches, the various pinout configurations (styles), a cross reference for case numbers, old JEDEC "TO" numbers, and the new JEDEC "TO" designation.

Additionally, abstracts of available application notes are provided. Please contact your local sales representative for those desired.


## Package Outline Dimensions and Application Literature

7

# Package Outline Dimensions

Dimensions are in inches unless otherwise noted.

## CASE 20-03 TO-72 (TO-206AF) METAL



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	5.31	5.84	0.209	0.230
B	4.52	4.95	0.178	0.195
C	4.32	5.33	0.170	0.210
D	0.41	0.53	0.016	0.021
E	—	0.76	—	0.030
F	0.41	0.48	0.016	0.019
G	2.54 BSC		0.100 BSC	
H	0.91	1.17	0.036	0.046
J	0.71	1.22	0.028	0.048
K	12.70	—	0.500	—
L	6.35	—	0.250	—
M	45° BSC		45° BSC	
N	1.27 BSC		0.050 BSC	
P	—	1.27	—	0.050

All JEDEC dimensions and notes apply.

NOTE: ALL RULES AND NOTES ASSOCIATED WITH TO-72 OUTLINE SHALL APPLY.

## CASE 20 STYLES

STYLE 1:  
PIN 1. SOURCE  
2. DRAIN  
3. GATE  
4. CASE LEAD

STYLE 5:  
PIN 1. SOURCE  
2. GATE 1  
3. DRAIN  
4. CASE



STYLE 2:  
PIN 1. SOURCE  
2. GATE  
3. DRAIN  
4. SUBSTRATE AND CASE LEAD

STYLE 6:  
PIN 1. DRAIN  
2. SOURCE AND SUBSTRATE  
3. GATE  
4. SOURCE AND SUBSTRATE

STYLE 9:  
PIN 1. DRAIN  
2. GATE 2  
3. GATE 1  
4. SOURCE, SUBSTRATE AND CASE

STYLE 3:  
PIN 1. DRAIN  
2. SOURCE  
3. GATE  
4. CASE LEAD

STYLE 7:  
PIN 1. DRAIN  
2. SOURCE  
3. GATE  
4. CASE AND SUBSTRATE


STYLE 10:  
PIN 1. EMITTER  
2. BASE  
3. COLLECTOR  
4. CASE

STYLE 4:  
PIN 1. SOURCE  
2. GATE  
3. DRAIN  
4. GATE 2—SUBSTRATE AND CASE

STYLE 8:  
PIN 1. EMITTER 2  
2. BASE 1  
3. COLLECTOR  
4. EMITTER 1  
BASE 2

STYLE 11:  
PIN 1. EMITTER  
2. CATHODE  
3. COLLECTOR  
4. ANODE

## CASE 22-03 TO-18 (TO-206AA) METAL



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	5.31	5.84	0.209	0.230
B	4.52	4.95	0.178	0.195
C	4.32	5.33	0.170	0.210
D	0.406	0.533	0.016	0.021
E	—	0.762	—	0.030
F	0.406	0.483	0.016	0.019
G	2.54 BSC		0.100 BSC	
H	0.914	1.17	0.036	0.046
J	0.711	1.22	0.028	0.048
K	12.70	—	0.500	—
L	6.35	—	0.250	—
M	45° BSC		45° BSC	
N	1.27 BSC		0.050 BSC	
P	—	1.27	—	0.050

All JEDEC notes and dimensions apply.

## CASE 22 STYLES

STYLE 1:  
PIN 1. EMITTER  
2. BASE  
3. COLLECTOR

STYLE 6:  
PIN 1. CATHODE  
2. GATE  
3. ANODE



STYLE 2:  
PIN 1. SOURCE, SUBSTRATE AND CASE  
2. GATE  
3. DRAIN

STYLE 7:  
PIN 1. ANODE  
2. BASE  
3. CATHODE

STYLE 3:  
PIN 1. SOURCE  
2. DRAIN  
3. GATE

STYLE 8:  
PIN 1. GATE  
2. ANODE 1  
3. ANODE 2

STYLE 11:  
PIN 1. DRAIN  
2. GATE  
3. SOURCE, SUBSTRATE

STYLE 4:  
PIN 1. SOURCE  
2. DRAIN  
3. GATE AND CASE

STYLE 9:  
PIN 1. ANODE 2  
2. ANODE 1  
3. GATE (CONNECTED TO CASE)


STYLE 12:  
PIN 1. SOURCE  
2. GATE  
3. DRAIN (CASE)

STYLE 5:  
PIN 1. EMITTER  
2. BASE 1  
3. BASE 2

STYLE 10:  
PIN 1. BASE  
2. EMITTER  
3. BASE

STYLE 13:  
PIN 1. ANODE  
2. GATE  
3. CATHODE

## CASE 26-03 TO-46 (TO-206AB) METAL




STYLE 1:  
PIN 1. EMITTER  
2. BASE  
3. COLLECTOR

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	5.31	5.84	0.209	0.230
B	4.52	4.95	0.178	0.195
C	1.65	2.16	0.065	0.085
D	0.406	0.533	0.016	0.021
E	—	1.02	—	0.040
F	0.305	0.483	0.012	0.019
G	2.54 BSC		0.100 BSC	
H	0.914	1.17	0.036	0.046
J	0.711	1.22	0.028	0.048
K	12.70	—	0.500	—
L	6.35	—	0.250	—
M	45° BSC		45° BSC	
N	1.27 BSC		0.050 BSC	
P	—	1.27	—	0.050

All JEDEC dimensions and notes apply.

## CASE 27-02 TO-52 (TO-206AC) METAL



STYLE 1:  
PIN 1. EMITTER  
2. BASE  
3. COLLECTOR

STYLE 4:  
PIN 1. SOURCE  
2. DRAIN  
3. GATE & CASE

STYLE 2:  
PIN 1. DRAIN  
2. SOURCE  
3. GATE & CASE

STYLE 5:  
PIN 1. SOURCE  
2. GATE  
3. DRAIN & CASE

STYLE 3:  
PIN 1. EMITTER  
2. BASE  
3. BASE 2

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	5.31	5.84	0.209	0.230
B	4.52	4.95	0.178	0.195
C	2.92	3.81	0.115	0.150
D	—	0.533	—	0.021
E	—	0.762	—	0.030
F	0.406	0.483	0.016	0.019
G	2.54 BSC		0.100 BSC	
H	0.914	1.17	0.036	0.046
J	0.711	1.22	0.028	0.048
K	12.70	—	0.500	—
L	6.35	—	0.250	—
M	45° BSC		45° BSC	
N	1.27 BSC		0.050 BSC	
P	—	1.27	—	0.050


NOTE: 1 ALL RULES & NOTES ASSOCIATED WITH TO-52 OUTLINE SHALL APPLY.

PACKAGE OUTLINE DIMENSIONS (continued)

T-90-20  
T-91-20

CASE 29-03 TO-92 (TO-226AE) PLASTIC


- NOTES:  
1. DIMENSIONS -A- AND -B- ARE DATUMS.  
2. -T- IS SEATING PLANE.  
3. POSITIONAL TOLERANCE FOR LEADS:  
 $\pm 0.10 (0.004) \text{ T } | \text{ A } | \text{ H } | \text{ H } |$   
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1982.  
5. CONTROLLING DIM: INCH



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	7.87	7.87	0.310	0.310
B	4.44	5.21	0.175	0.205
C	3.18	4.19	0.125	0.165
D	0.46	0.61	0.018	0.024
G	1.27 BSC		0.050 BSC	
J	2.54 BSC		0.100 BSC	
K	12.70	—	0.500	—
N	2.03	2.92	0.080	0.115
R	3.43	—	0.135	—
S	0.46	0.61	0.018	0.024

CASE 29-04 TO-92 (TO-226AA) PLASTIC

- NOTES:  
1. CONTOUR OF PACKAGE BEYOND ZONE "P" IS UNCONTROLLED.  
2. DIM "F" APPLIES BETWEEN "H" AND "L". DIM "D" & "S" APPLIES BETWEEN "L" & 12.70mm (0.5") FROM SEATING PLANE. LEAD DIM IS UNCONTROLLED IN "H" & BEYOND 12.70mm (0.5") FROM SEATING PLANE.  
3. CONTROLLING DIM: INCH




DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.32	5.33	0.170	0.210
B	4.45	5.20	0.175	0.205
C	3.18	4.19	0.125	0.165
D	0.41	0.55	0.016	0.022
F	0.41	0.48	0.016	0.019
G	1.15	1.39	0.045	0.054
H	—	2.54	—	0.100
J	2.42	2.66	0.095	0.105
K	12.70	—	0.500	—
L	6.35	—	0.250	—
N	2.04	2.66	0.080	0.105
P	2.53	—	0.115	—
R	3.43	—	0.135	—
S	0.39	0.50	0.015	0.020

CASE 29 STYLES


- |  |   |   |  |  |
|--|---|---|--|--|
| STYLE 1:<br>PIN 1. EMITTER<br>2. BASE<br>3. COLLECTOR        | STYLE 7:<br>PIN 1. SOURCE<br>2. DRAIN<br>3. GATE              | STYLE 13:<br>PIN 1. ANODE 1<br>2. GATE<br>3. CATHODE 2  | STYLE 20:<br>PIN 1. NOT CONN<br>2. CATHODE<br>3. ANODE | STYLE 27:<br>PIN 1. MT<br>2. SUBSTRATE<br>3. MT        |
| STYLE 2:<br>PIN 1. BASE<br>2. EMITTER<br>3. COLLECTOR        | STYLE 8:<br>PIN 1. DRAIN<br>2. GATE<br>3. SOURCE & SUBSTRATE  | STYLE 14:<br>PIN 1. EMITTER<br>2. COLLECTOR<br>3. BASE  | STYLE 21:<br>PIN 1. COLLECTOR<br>2. EMITTER<br>3. BASE | STYLE 28:<br>PIN 1. CATHODE<br>2. ANODE<br>3. GATE     |
| STYLE 3:<br>PIN 1. ANODE<br>2. ANODE<br>3. CATHODE           | STYLE 9:<br>PIN 1. ANODE<br>2. EMITTER<br>3. BASE 2           | STYLE 15:<br>PIN 1. ANODE 1<br>2. CATHODE<br>3. ANODE 2 | STYLE 22:<br>PIN 1. SOURCE<br>2. ANODE<br>3. DRAIN     | STYLE 29:<br>PIN 1. NOT CONN<br>2. ANODE<br>3. CATHODE |
| STYLE 4:<br>PIN 1. CATHODE<br>2. CATHODE<br>3. ANODE         | STYLE 10:<br>PIN 1. CATHODE<br>2. GATE<br>3. ANODE            | STYLE 16:<br>PIN 1. ANODE<br>2. GATE<br>3. CATHODE      | STYLE 23:<br>PIN 1. GATE<br>2. SOURCE<br>3. DRAIN      | STYLE 30:<br>PIN 1. DRAIN<br>2. GATE<br>3. SOURCE      |
| STYLE 5:<br>PIN 1. DRAIN<br>2. SOURCE<br>3. GATE             | STYLE 11:<br>PIN 1. ANODE<br>2. CATHODE & ANODE<br>3. CATHODE | STYLE 17:<br>PIN 1. COLLECTOR<br>2. BASE<br>3. EMITTER  | STYLE 24:<br>PIN 1. EMITTER<br>2. COLLECTOR/<br>ANODE  | STYLE 31:<br>PIN 1. GATE<br>2. DRAIN<br>3. SOURCE      |
| STYLE 6:<br>PIN 1. GATE<br>2. SOURCE & SUBSTRATE<br>3. DRAIN | STYLE 12:<br>PIN 1. MAIN TER 1<br>2. GATE<br>3. MAIN TER 2    | STYLE 18:<br>PIN 1. ANODE<br>2. CATHODE<br>3. NOT CONN  | STYLE 25:<br>PIN 1. MT 1<br>2. GATE<br>3. MT 2         |  |
|  |   | STYLE 19:<br>PIN 1. GATE<br>2. ANODE<br>3. CATHODE      | STYLE 26:<br>PIN 1. VCC<br>2. GROUND<br>3. OUTPUT      |  |

CASE 79-04 TO-39 (TO-205AD) METAL



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.51	9.39	0.335	0.370
B	7.75	8.50	0.305	0.335
C	6.10	6.60	0.240	0.260
D	0.41	0.53	0.016	0.021
E	0.23	1.04	0.009	0.041
F	0.41	0.48	0.016	0.019
G	5.08 BSC		0.200 BSC	
H	0.72	0.86	0.028	0.034
J	0.74	1.14	0.029	0.045
K	12.70	19.05	0.500	0.750
L	6.35	—	0.250	—
M	—	45° BSC	—	45° BSC
P	—	1.27	—	0.050
R	2.54	—	0.100	—

CASE 79-05 TO-39 (TO-205AF) METAL



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.02	9.29	0.355	0.366
B	8.01	8.50	0.315	0.335
C	4.20	4.57	0.165	0.180
D	0.44	0.53	0.017	0.021
E	0.44	0.59	0.017	0.035
F	0.41	0.48	0.016	0.019
G	5.08 BSC		0.200 BSC	
H	0.72	0.86	0.028	0.034
J	0.74	1.01	0.029	0.040
K	12.70	19.05	0.500	0.750
L	6.35	—	0.250	—
M	—	45° BSC	—	45° BSC
P	—	1.27	—	0.050
R	2.54	—	0.100	—

CASE 79 STYLES



- NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1982.  
2. CONTROLLING DIMENSION: INCH.  
3. DIMENSION J MEASURED FROM DIMENSION A MAXIMUM.  
4. DIMENSION B SHALL NOT VARY MORE THAN 0.25 (0.010) IN ZONE B. THIS ZONE CONTROLLED FOR AUTOMATIC HANDLING.  
5. DIMENSION F APPLIES BETWEEN DIMENSION P AND L. DIMENSION D APPLIES BETWEEN DIMENSION L AND K MAXIMUM. LEAD DIAMETER IS UNCONTROLLED BY DIMENSION P AND BEYOND DIMENSION K MAXIMUM.
- |   |   |  |
|---|---|--|
| STYLE 1:<br>PIN 1. EMITTER<br>2. BASE<br>3. COLLECTOR | STYLE 5:<br>PIN 1. COLLECTOR<br>2. BASE<br>3. EMITTER   | STYLE 8:<br>PIN 1. ANODE<br>2. ANODE<br>3. CATHODE     |
| STYLE 2:<br>PIN 1. DRAIN<br>2. SOURCE<br>3. GATE      | STYLE 6:<br>PIN 1. SOURCE<br>2. GATE<br>3. DRAIN (CASE) | STYLE 9:<br>PIN 1. SOURCE<br>2. DRAIN<br>3. GATE       |
| STYLE 3:<br>PIN 1. CATHODE<br>2. GATE<br>3. ANODE     | STYLE 7:<br>PIN 1. DRAIN<br>2. GATE<br>3. SOURCE        | STYLE 10:<br>PIN 1. COLLECTOR<br>2. EMITTER<br>3. BASE |

7


PACKAGE OUTLINE DIMENSIONS (continued)

T-90-20  
T-91-20

CASE 182-02 TO-92 (TO-226AC) PLASTIC

- NOTES:  
1. CONTOUR OF PACKAGE BEYOND ZONE P IS UNCONTROLLED.  
2. DIMENSION F APPLIES BETWEEN H AND L. DIMENSION D AND S APPLIES BETWEEN L AND L2. DIMENSION D AND S FROM SEATING PLANE. LEAD DIMENSION IS UNCONTROLLED IN H AND BEYOND 12.70mm (0.5") FROM SEATING PLANE.


- STYLE 1  
PIN 1 ANODE  
2 CATHODE
- STYLE 2  
PIN 1 CATHODE  
2 ANODE
- STYLE 3  
PIN 1 MAIN TERMINAL 1  
2 MAIN TERMINAL 2



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.32	5.33	0.170	0.210
B	4.45	5.21	0.175	0.205
C	3.18	4.19	0.125	0.165
D	0.41	0.56	0.016	0.022
F	0.407	0.482	0.016	0.019
G	1.27	BSC	0.050	BSC
H	—	1.27	—	0.050
J	2.54	BSC	0.100	BSC
K	12.70	—	0.500	—
L	6.35	—	0.250	—
N	2.03	2.66	0.080	0.105
P	2.93	—	0.115	—
R	3.43	—	0.135	—
S	0.38	0.41	0.014	0.016

CASE 318-03 TO-236AB (SOT-23) PLASTIC

- NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: INCH.



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.90	3.04	0.1102	0.1197
B	1.20	1.40	0.0472	0.0551
C	0.89	1.11	0.0350	0.0440
D	0.37	0.50	0.0150	0.0200
F	0.085	0.130	0.0034	0.0051
G	1.78	2.04	0.0701	0.0807
H	0.45	0.60	0.0177	0.0236
K	0.013	0.100	0.0005	0.0040
L	2.10	2.50	0.0830	0.0984
M	0.45	0.60	0.0180	0.0236
N	0.89	1.02	0.0350	0.0401

CASE 318 STYLES

- STYLE 6:  
PIN 1. BASE  
2. EMITTER  
3. COLLECTOR
- STYLE 7:  
PIN 1. EMITTER  
2. BASE  
3. COLLECTOR
- STYLE 8:  
PIN 1. ANODE  
2. NO CONNECTION  
3. CATHODE
- STYLE 9:  
PIN 1. ANODE  
2. ANODE  
3. CATHODE
- STYLE 10:  
PIN 1. DRAIN  
2. SOURCE  
3. GATE
- STYLE 11:  
PIN 1. ANODE  
2. CATHODE  
3. CATHODE-ANODE
- STYLE 12:  
PIN 1. CATHODE  
2. CATHODE  
3. ANODE
- STYLE 13:  
PIN 1. SOURCE  
2. DRAIN  
3. GATE
- STYLE 14:  
PIN 1. CATHODE  
2. GATE  
3. ANODE
- STYLE 15:  
PIN 1. GATE  
2. CATHODE  
3. ANODE
- STYLE 16:  
PIN 1. ANODE  
2. CATHODE  
3. CATHODE
- STYLE 17:  
PIN 1. NO CONNECTION  
2. ANODE  
3. CATHODE
- STYLE 18:  
PIN 1. NO CONNECTION  
2. CATHODE  
3. ANODE
- STYLE 19:  
PIN 1. CATHODE  
2. ANODE  
3. CATHODE-ANODE
- STYLE 20:  
PIN 1. CATHODE  
2. ANODE  
3. GATE
- STYLE 21:  
PIN 1. GATE  
2. SOURCE  
3. DRAIN
- NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: INCH.

CASE 370-01 (FET DIP) PLASTIC

NOTES:  
1. SURFACE "T" IS BOTH A DATUM AND SEATING PLANE.  
2. POSITIONAL TOLERANCE FOR LEADS: 0.254 PL  
LEADS: J DIM 4 PL  
LEADS: J DIM 4 PL

3. DIMENSIONING AND TOLERANCING PER Y14.5M, 1982.  
4. CONTROLLING DIMENSION: INCH  
5. DIMENSION "J" PRIOR TO SOLDER DIP PLATING

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.70	5.02	0.185	0.198
B	6.10	7.11	0.240	0.280
C	4.08	5.08	0.160	0.200
D	0.38	0.63	0.015	0.025
G	2.54	BSC	0.100	BSC
J	0.30	0.43	0.012	0.017
K	2.79	3.81	0.110	0.150
L	7.62	BSC	0.300	BSC
M	0°	15°	0°	15°
N	0.51	1.77	0.020	0.070

STYLE 1:  
PIN 1. DRAIN  
2. GATE  
3. SOURCE

CASE 606-04 TO-91 CERAMIC

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.10	7.36	0.240	0.290
B	6.10	6.60	0.240	0.260
C	0.762	1.27	0.030	0.070
D	0.254	0.482	0.010	0.019
F	0.077	0.152	0.003	0.006
G	1.15	1.33	0.045	0.055
H	0.127	0.889	0.005	0.035
K	1.78	—	0.070	—
R	—	0.381	—	0.015

NOTE:  
1. ALL RULES & NOTES ASSOCIATED WITH TO-91 OUTLINE SHALL APPLY.  
2. LEADS WITHIN 0.25 mm (0.010) TOTAL OF TRUE POSITION AT MAXIMUM MATERIAL CONDITION (AT BODY)

CASE 607-04 CERAMIC

STYLE 1  
PIN 1. COLLECTOR  
2. BASE  
3. EMITTER  
4. NOT CONNECTED  
5. EMITTER  
6. BASE  
7. COLLECTOR  
8. COLLECTOR  
9. BASE  
10. EMITTER  
11. NOT CONNECTED  
12. EMITTER  
13. BASE  
14. COLLECTOR

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.10	6.98	0.240	0.275
B	6.10	6.98	0.240	0.275
C	0.77	1.77	0.030	0.070
D	0.26	0.48	0.010	0.019
F	—	0.38	—	0.015
G	1.27	BSC	0.050	BSC
H	0.13	0.89	0.005	0.035
J	0.08	0.015	0.003	0.006
K	8.35	—	0.290	—
L	0.26	—	0.010	—
N	4.45	4.95	0.175	0.195
P	—	0.38	—	0.015
S	18.80	—	0.740	—
V	7.62	8.38	0.300	0.330

NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: INCH.  
3. DIMENSIONS P DETERMINE ZONE WITHIN WHICH ALL BODY AND LEAD IRREGULARITIES LIE.

PACKAGE OUTLINE DIMENSIONS (continued)


T-90-20

T-91-20


CASE 607-05 CERAMIC

STYLE 1:

- PIN 1. COLLECTOR
- 2. BASE
- 3. EMITTER
- 4. NOT CONNECTED
- 5. EMITTER
- 6. BASE
- 7. COLLECTOR
- 8. COLLECTOR
- 9. BASE
- 10. EMITTER
- 11. NOT CONNECTED
- 12. EMITTER
- 13. BASE
- 14. COLLECTOR



- NOTES:
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - CONTROLLING DIMENSION: INCH.
  - DIMENSIONS P DETERMINE ZONE WITHIN WHICH ALL BODY AND LEAD IRREGULARITIES ARE.




DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.10	6.60	0.240	0.260
B	6.10	6.60	0.240	0.260
C	0.77	1.77	0.030	0.070
D	0.33	0.48	0.013	0.019
F	—	0.38	—	0.015
G	1.27 BSC	—	0.050 BSC	—
H	0.30	0.88	0.012	0.035
J	0.08	0.15	0.003	0.006
K	6.35	9.39	0.250	0.370
L	0.26	—	0.010	—
P	—	0.38	—	0.015
S	18.80	—	0.740	—
V	7.62	8.38	0.300	0.330

CASE 610A-04 CERAMIC

STYLE 1:

- PIN 1. BASE
- 2. EMITTER
- 4. EMITTER
- 5. BASE
- 7. COLLECTOR
- 8. COLLECTOR

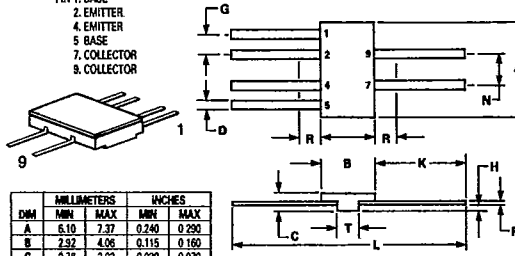


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.10	7.27	0.240	0.290
B	2.92	4.06	0.115	0.160
C	0.76	2.03	0.030	0.070
D	0.36	0.48	0.014	0.019
F	0.08	0.15	0.003	0.006
G	1.27 BSC	—	0.050 BSC	—
H	0.13	0.89	0.005	0.035
K	3.81	—	0.150	—
L	10.54	—	0.415	—
N	—	2.54 BSC	—	0.100 BSC
R	—	1.27	—	0.050
T	1.65	2.03	0.065	0.080

- NOTES:
- DIM "D," "G" & "N" TO BE MEASURED IN ZONE "R"
  - LEADS WITHIN 0.13 mm (0.005) TOTAL OF TRUE POSITION WITHIN "R" AT MAXIMUM MATERIAL CONDITION.

CASE 620-09 (16-PIN DIP) CERAMIC

NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
- DIM F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.




- STYLE 1:
- PIN 1. CATHODE
  - 2. CATHODE
  - 3. CATHODE
  - 4. CATHODE
  - 5. CATHODE
  - 6. CATHODE
  - 7. CATHODE
  - 8. CATHODE
  - 9. ANODE
  - 10. ANODE
  - 11. ANODE
  - 12. ANODE
  - 13. ANODE
  - 14. ANODE
  - 15. ANODE
  - 16. ANODE

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	19.05	19.55	0.750	0.770
B	6.10	7.36	0.240	0.290
C	—	4.19	—	0.165
D	0.38	0.53	0.015	0.021
E	1.27 BSC	—	0.050 BSC	—
F	1.40	1.77	0.055	0.070
G	2.54 BSC	—	0.100 BSC	—
J	0.23	0.27	0.009	0.011
K	—	5.08	—	0.200
L	7.62 BSC	—	0.300 BSC	—
M	0°	15°	0°	15°
N	0.39	0.88	0.015	0.035

CASE 632-08 MO-001AA (TO-116) CERAMIC

NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
- DIM F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	19.05	19.94	0.750	0.785
B	6.23	7.11	0.245	0.280
C	3.34	5.08	0.135	0.200
D	0.39	0.50	0.015	0.020
F	1.40	1.63	0.055	0.065
G	2.54 BSC	—	0.100 BSC	—
J	0.21	0.28	0.008	0.011
K	3.18	4.31	0.125	0.170
L	7.62 BSC	—	0.300 BSC	—
M	0°	15°	0°	15°
N	0.51	1.01	0.020	0.040

- STYLE 1:
- PIN 1. COLLECTOR
  - 2. BASE
  - 3. EMITTER
  - 4. NO CONNECTION
  - 5. EMITTER
  - 6. BASE
  - 7. COLLECTOR
  - 8. COLLECTOR
  - 9. BASE
  - 10. EMITTER
  - 11. NO CONNECTION
  - 12. EMITTER
  - 13. BASE
  - 14. COLLECTOR
- STYLE 4:
- PIN 1. DRAIN
  - 2. SOURCE
  - 3. GATE
  - 4. NO CONNECTION
  - 5. GATE
  - 6. SOURCE
  - 7. DRAIN
  - 8. DRAIN
  - 9. SOURCE
  - 10. GATE
  - 11. NO CONNECTION
  - 12. GATE
  - 13. SOURCE
  - 14. DRAIN


CASE 646-06 (14-PIN DIP) PLASTIC

STYLE 1:


- PIN 1. COLLECTOR
- 2. BASE
- 3. EMITTER
- 4. NO CONNECTION
- 5. EMITTER
- 6. BASE
- 7. COLLECTOR
- 8. COLLECTOR
- 9. BASE
- 10. EMITTER
- 11. NO CONNECTION
- 12. EMITTER
- 13. BASE
- 14. COLLECTOR

STYLE 5:

- PIN 1. GATE
- 2. DRAIN
- 3. SOURCE
- 4. NO CONNECTION
- 5. SOURCE
- 6. DRAIN
- 7. GATE
- 8. GATE
- 9. DRAIN
- 10. SOURCE
- 11. NO CONNECTION
- 12. SOURCE
- 13. DRAIN
- 14. GATE





- NOTES:
- LEADS WITHIN 0.13 mm (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
  - DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
  - DIMENSION "B" DOES NOT INCLUDE MOLD FLASH.
  - ROUNDED CORNERS OPTIONAL.




DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	18.16	19.56	0.715	0.770
B	6.10	6.60	0.240	0.260
C	3.69	4.69	0.145	0.185
D	0.36	0.53	0.015	0.021
F	1.02	1.78	0.040	0.070
G	2.54 BSC	—	0.100 BSC	—
H	1.32	2.41	0.052	0.095
J	0.20	0.38	0.008	0.015
K	2.92	3.43	0.115	0.135
L	7.62 BSC	—	0.300 BSC	—
M	0°	10°	0°	10°
N	0.39	1.01	0.015	0.039

7

CASE 648-08 (16-PIN DIP) PLASTIC

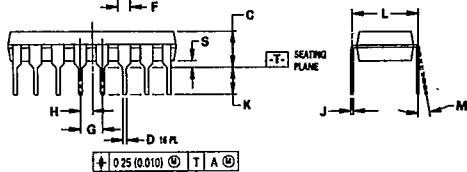


- NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.  
 3. DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.  
 4. DIMENSION "B" DOES NOT INCLUDE MOLD FLASH.  
 5. ROUNDED CORNERS OPTIONAL.



- |                |                     |
|----------------|---------------------|
| STYLE 1:       | STYLE 2:            |
| PIN 1. CATHODE | PIN 1. COMMON DRAIN |
| 2. CATHODE     | 2. COMMON DRAIN     |
| 3. CATHODE     | 3. COMMON DRAIN     |
| 4. CATHODE     | 4. COMMON DRAIN     |
| 5. CATHODE     | 5. COMMON DRAIN     |
| 6. CATHODE     | 6. COMMON DRAIN     |
| 7. CATHODE     | 7. COMMON DRAIN     |
| 8. CATHODE     | 8. COMMON DRAIN     |
| 9. ANODE       | 9. GATE             |
| 10. ANODE      | 10. SOURCE          |
| 11. ANODE      | 11. GATE            |
| 12. ANODE      | 12. SOURCE          |
| 13. ANODE      | 13. GATE            |
| 14. ANODE      | 14. SOURCE          |
| 15. ANODE      | 15. GATE            |
| 16. ANODE      | 16. SOURCE          |

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	18.80	19.55	0.740	0.770
B	6.25	6.85	0.250	0.270
C	3.69	4.44	0.145	0.175
D	0.39	0.53	0.015	0.021
F	1.02	1.77	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	1.27 BSC		0.050 BSC	
J	0.21	0.38	0.008	0.015
K	2.80	3.30	0.110	0.130
L	7.50	7.74	0.295	0.305
M	0°	10°	0°	10°
S	0.51	1.01	0.020	0.040


CASE 650-05 CERAMIC

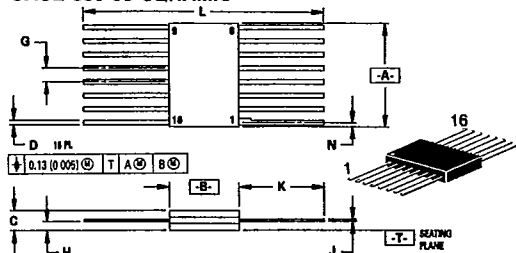

- NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.  
 3. DIMENSION "A" AND "B" ALLOW FOR LID MISALIGNMENT, AND GLASS MISMATCH.  
 4. DIMENSION "H" SHALL BE MEASURED AT THE POINT OF EXIT OF THE LEAD FROM THE BODY.  
 5. LEAD NUMBER 1 IDENTIFIED BY TAB ON LEAD OR DOT ON COVER.  
 6. DIMENSION "J" INCLUDES SOLDER LEAD FINISH.  
 7. LEAD NUMBERS SHOWN FOR REFERENCE ONLY.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.40	9.90	0.370	0.390
B	6.23	6.60	0.245	0.260
C	1.53	2.15	0.060	0.085
D	0.36	0.48	0.014	0.019
G	1.27 BSC		0.050 BSC	
H	0.64	1.01	0.025	0.040
J	0.11	0.17	0.004	0.007
K	6.25	9.39	0.250	0.370
L	18.93		0.745	
N		0.50		0.020

CASE 654-07 METAL




- STYLE 1:  
 PIN 1. COLLECTOR  
 2. BASE  
 3. EMITTER  
 4. OMMITTER  
 5. EMITTER  
 6. BASE  
 7. COLLECTOR  
 8. OMMITTER

- STYLE 5:  
 SIDE 1 (NPN)  
 PIN 1. COLLECTOR  
 2. BASE  
 3. EMITTER  
 4. OMMITTER  
 SIDE 2 (PNP)  
 5. EMITTER  
 6. BASE  
 7. COLLECTOR  
 8. OMMITTER

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	8.51	9.40	0.335	0.370
B	7.75	8.51	0.305	0.335
C	3.81	4.70	0.150	0.185
D	0.41	0.53	0.016	0.021
G	1.00 BSC		0.039 BSC	
H	0.71	0.86	0.028	0.034
J	0.74	1.14	0.029	0.045
K	12.70		0.500	
M	45° BSC		45° BSC	
N	2.54 BSC		0.100 BSC	


CASE 751A-02 (SO-14) PLASTIC

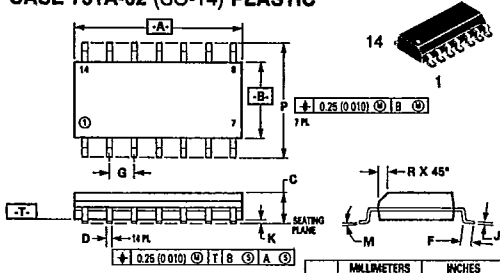

- NOTES:  
 1. DIMENSIONS A AND B ARE DATUMS AND T IS A DATUM SURFACE.  
 2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 3. CONTROLLING DIMENSION: MILLIMETER.  
 4. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.  
 5. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	8.55	8.75	0.337	0.344
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

CASE 751B-03 (SO-16) PLASTIC

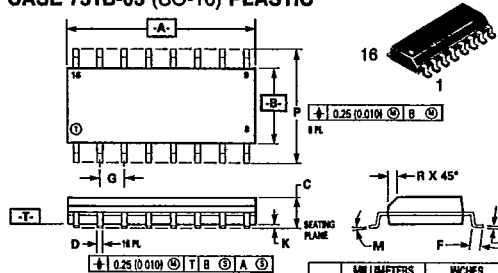

- NOTES:  
 1. DIMENSIONS A AND B ARE DATUMS AND T IS A DATUM SURFACE.  
 2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 3. CONTROLLING DIMENSION: MILLIMETER.  
 4. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.  
 5. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.80	10.00	0.386	0.393
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019