

## N-Channel Enhancement Mode Power MOSFET

### ■ Features

- Low Gate Charge
- Single Drive Requirement
- Surface Mount Package
- Pb Free Plating Product

### ■ Product Summary


BV <sub>DSS</sub> (V)	R <sub>DS(ON)</sub> (mΩ)	I <sub>D</sub> (A)
60	100	11

### ■ General Description

The advanced power MOSFET provides the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The TO-252 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.


### ■ Pin Assignments




### ■ Pin Descriptions

Pin Name	Description
S	Source
G	Gate
D	Drain

### ■ Ordering information

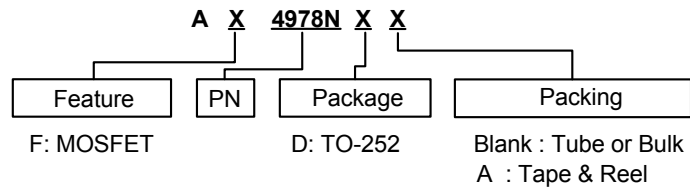

### ■ Block Diagram

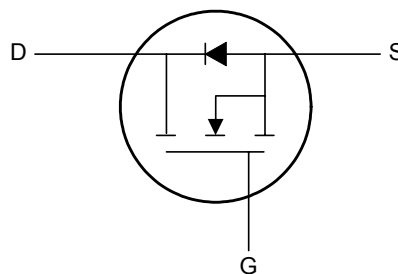



## N-Channel Enhancement Mode Power MOSFET

### ■ Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	60	V
$V_{GS}$	Gate-Source Voltage	$\pm 25$	V
$I_D$	Continuous Drain Current, $V_{GS}=10V$	$T_C=25^\circ C$	11
		$T_C=100^\circ C$	6.8
$I_{DM}$	Pulsed Drain Current (Note 1)	45	A
$P_D$	Total Power Dissipation	$T_C=25^\circ C$	21
	Linear Derating Factor		0.17
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ C$
$T_J$	Operating Junction Temperature Range	-55 to 150	$^\circ C$

### ■ Thermal Data

Symbol	Parameter	Maximum	Units
$R_{\theta JC}$	Thermal Resistance Junction-Case	Max.	6
$R_{\theta JA}$	Thermal Resistance Junction- Ambient	Max.	110

### ■ Electrical Characteristics at $T_J=25^\circ C$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	60	-	-	V
$\Delta BV_{DSS} / \Delta T_J$	Breakdown Voltage Temperature Coefficient	Reference to $25^\circ C$ , $I_D=1mA$	-	0.04	-	$V/^\circ C$
$R_{DS(ON)}$	Static Drain-Source On-Resistance (Note 2)	$V_{GS}=10V, I_D=5A$	-	-	100	m $\Omega$
		$V_{GS}=4.5V, I_D=4A$	-	-	125	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	1	-	3	V
$g_{fs}$	Forward Transconductance	$V_{DS}=10V, I_D=5A$	-	7	-	S
$I_{DSS}$	Drain-Source Leakage Current ( $T_J=25^\circ C$ )	$V_{DS}=60V, V_{GS}=0V$	-	-	10	uA
	Drain-Source Leakage Current ( $T_J=150^\circ C$ )	$V_{DS}=48V, V_{GS}=0V$	-	-	25	
$I_{GSS}$	Gate-Source Leakage	$V_{GS}=\pm 25V$	-	-	$\pm 100$	nA
$Q_g$	Total Gate Charge (Note 2)	$I_D=5A,$ $V_{DS}=48V,$ $V_{GS}=4.5V$	-	6	10	nC
$Q_{gs}$	Gate-Source Charge		-	2	-	
$Q_{gd}$	Gate-Drain ("Miller") Charge		-	3	-	
$t_{d(on)}$	Turn-On Delay Time (Note 2)	$V_{DS}=30V,$ $I_D=5A,$ $R_G=3.3\Omega, V_{GS}=10V$ $R_D=6\Omega$	-	6	-	ns
$t_r$	Rise Time		-	11	-	
$t_{d(off)}$	Turn-Off Delay Time		-	14	-	
$t_f$	Fall-Time		-	2	-	
$C_{iss}$	Input Capacitance	$V_{GS}=0V,$	-	485	780	pF
$C_{oss}$	Output Capacitance	$V_{DS}=25V,$	-	55	-	
$C_{rss}$	Reverse Transfer Capacitance	$f=1.0MHz$	-	40	-	

### ■ Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{SD}$	Forward On Voltage (Note 2)	$I_S=5A, V_{GS}=0V$	-	-	1.2	V
$t_{rr}$	Reverse Recovery Time	$I_S=5A, V_{GS}=0V,$	-	23	-	ns
$Q_{rr}$	Reverse Recovery Charge	$di/dt=100A/\mu s$	-	28	-	nC

**Note 1:** Pulse width limited by Max. junction temperature.

**Note 2:** Pulse width  $\leq 300\mu s$ , duty cycle  $\leq 2\%$ .

## N-Channel Enhancement Mode Power MOSFET

### ■ Typical Performance Characteristics

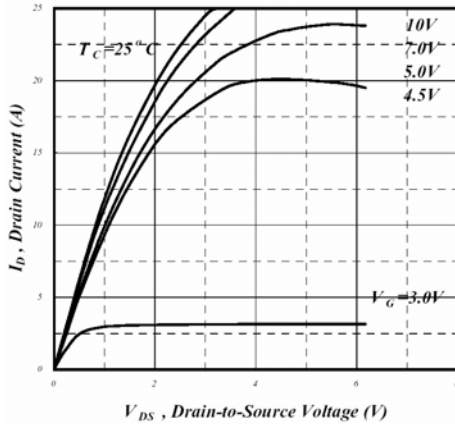


Fig 1. Typical Output Characteristics

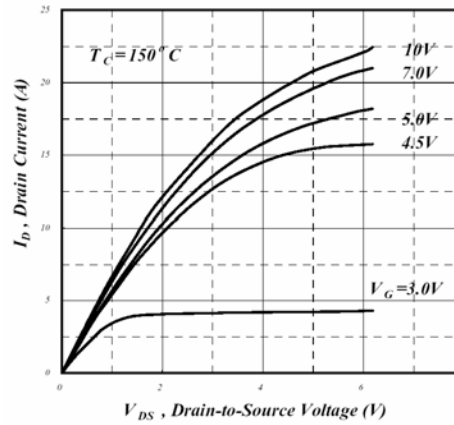


Fig 2. Typical Output Characteristics

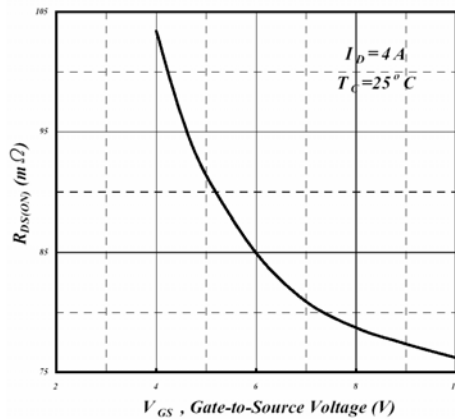


Fig 3. On-Resistance v.s. Gate Voltage

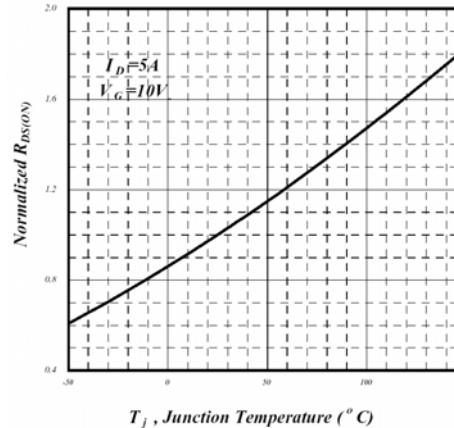


Fig 4. Normalized On-Resistance v.s. Junction Temperature

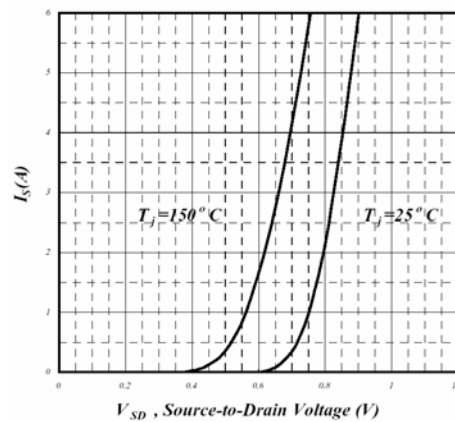


Fig 5. Forward Characteristic of Reverse Diode

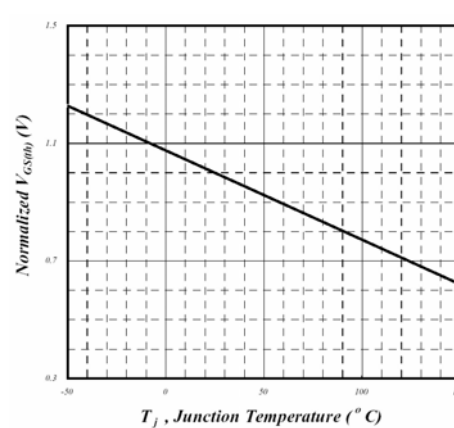


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

## N-Channel Enhancement Mode Power MOSFET

### Typical Performance Characteristics (Continued)

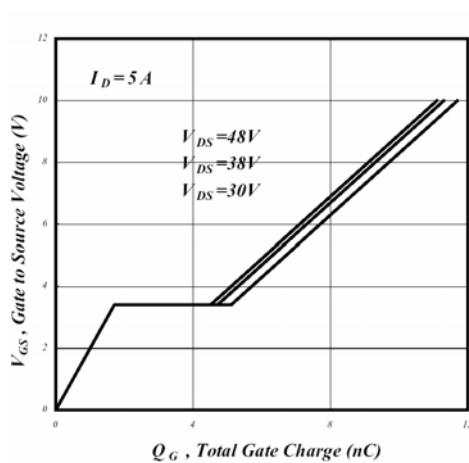


Fig 7. Gate Charge Characteristics

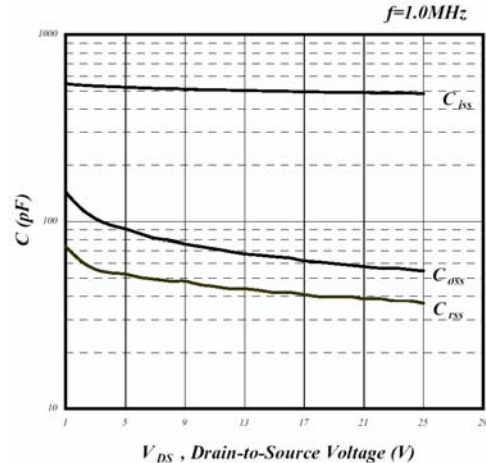


Fig 8. Typical Capacitance Characteristics

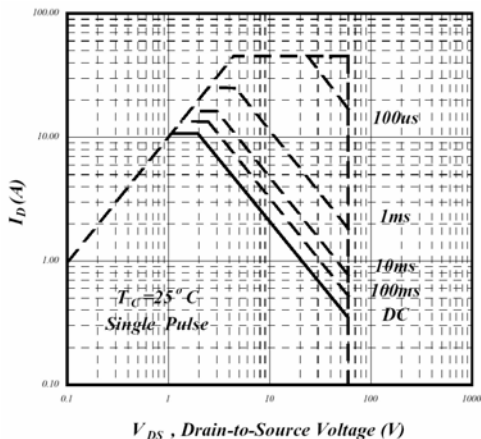


Fig 9. Maximum Safe Operating Area

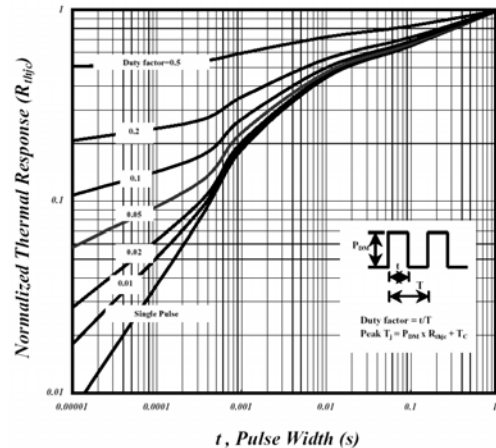


Fig 10. Effective Transient Thermal Impedance

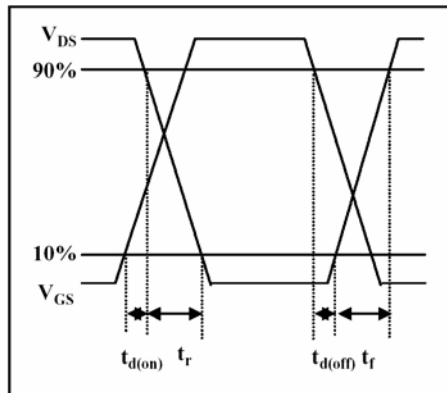


Fig 11. Switching Time Waveform


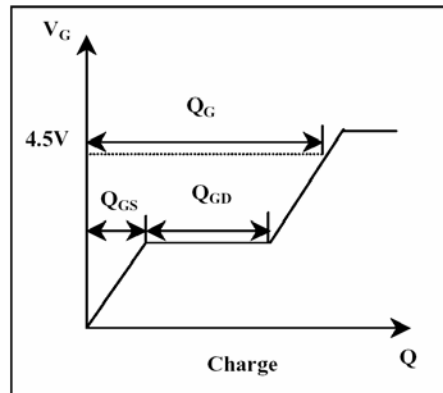


Fig 12. Gate Charge Waveform

## N-Channel Enhancement Mode Power MOSFET


### ■ Marking Information

TO-252

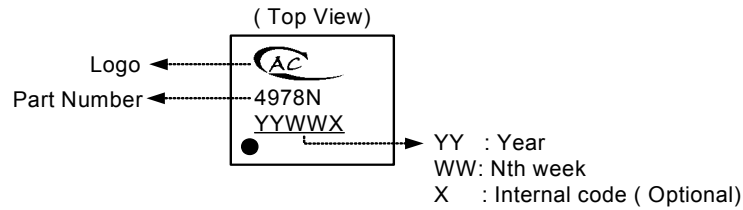

### ■ Package Information

Package Type: TO-252

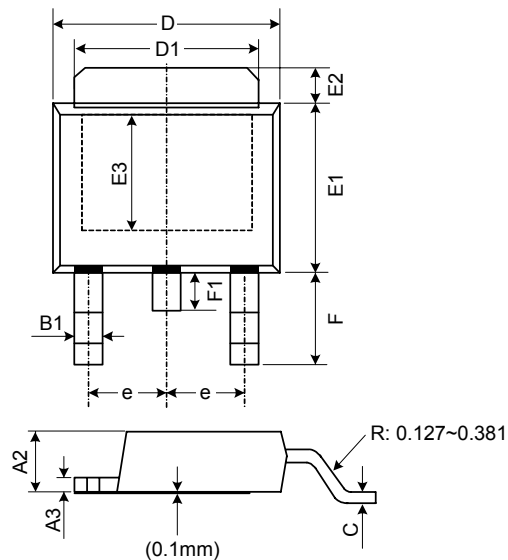

1. All Dimensions Are in Millimeters.
2. Dimension Does Not Include Mold Protrusions.

Symbol	Dimensions In Millimeters		
	Min.	Nom.	Max.
A2	1.80	2.30	2.80
A3	0.40	0.50	0.60
B1	0.40	0.70	1.00
D	6.00	6.50	7.00
D1	4.80	5.35	5.90
F	2.20	2.63	3.05
F1	0.50	0.85	1.20
E1	5.10	5.70	6.30
E2	0.50	1.10	1.70
E3	3.50	4.00	4.50
e	-	2.30	-
C	0.35	0.50	0.65