



1. Mechanical Dimensions:

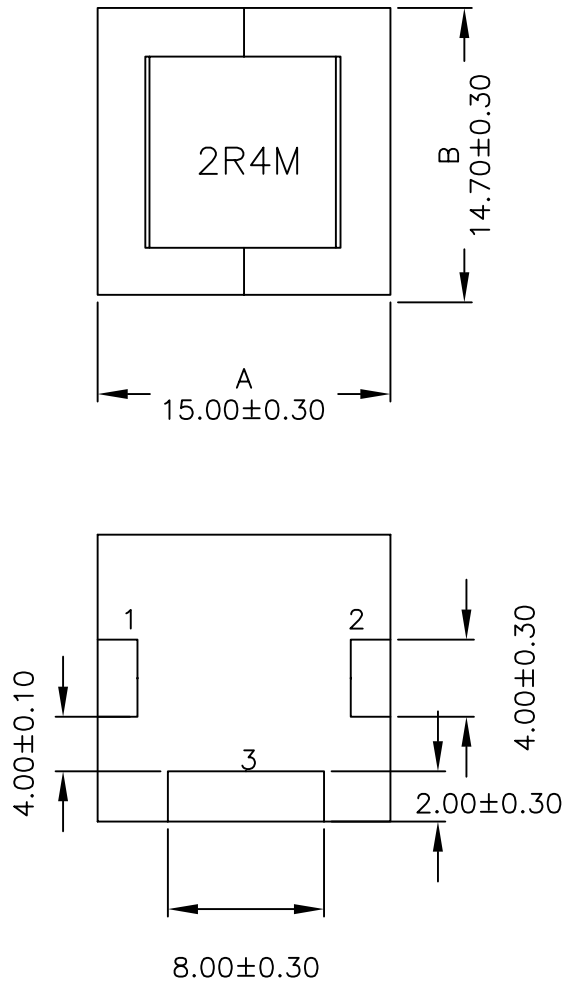

2. Schematic:



3. Electrical Specifications: @25°C

OCL: Pins 1,2-3 2.40±20% @100KHz 0.1V
 Isat: 16.8Adc Max (Based on 10% drop in OCL)
 DC Res.: 3.2mOhms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC REV: A/1

XFMRs Inc	Title: INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm	P/N: XF151510-2R4M	REV. A
	DWN.	李小锋	Feb-20-04
	CHK.	廖玉坤	Feb-20-04
SHEET 1 OF 1	APP.	MS	Feb-20-04