Type: CEEH135


Product Description

- 13.9×12.7mm Max.(L×W), 6.0mm Max. Height.
- In addition to the typical versions of parameters shown here, custom parameters are available to meet your exact requirements.


Feature

- Max. Operating frequency 500kHz.
- · Ideally used in Portable equipment.
- RoHS Compliance

Dimensions (mm)

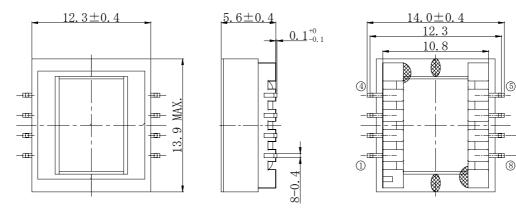


Schematics (Bottom)



"S" indicates winding start.

Specification

Sample No.	Inductance(2-1) (1kHz/1.0V)	Hi-pot	Isolation Resistance
		(1,2,3,4-7,8)	(1,2,3,4-7,8)
		@50/60Hz	@DC 500V
1351–T002	4.9m $\mathrm{H}\pm$ 35 $\%$ within	AC500Vrms/1min.	100M Ω Min.



0+0.

6-2.

Land Pattern (mm)

Please refer to the sales offices on our website for a representative near you **www.sumida.com**