

Advance Information

MPC7455RXNXPNS  
Rev. 1.1, 1/2004

MPC7455 Part Number  
Specification for the  
XPC74x5RXnnnNx Series



Motorola Part  
Numbers Affected:

- XPC7455RX600NC
- XPC7455RX733NC
- XPC7455RX800NC
- XPC7445RX600NC
- XPC7445RX733NC
- XPC7445RX800NC

This document describes part-number-specific changes to recommended operating conditions and revised electrical specifications, as applicable, from those described in the general MPC7455 RISC Microprocessor Hardware Specifications (Order No. MPC7455EC). The MPC7455 is a PowerPC™ microprocessor.

Specifications provided in this document supersede those in the MPC7455 RISC Microprocessor Hardware Specifications, Rev. 0 or later, for the part numbers listed in Table A only. Specifications not addressed herein are unchanged. Because this document is frequently updated, refer to <http://www.motorola.com/semiconductors> or to your Motorola sales office for the latest version.

Note that headings and table numbers in this document are not consecutively numbered. They are intended to correspond to the heading or table affected in the general hardware specification.

Part numbers addressed in this document are listed in Table A.

**Table A. Part Numbers Addressed by this Data Sheet**

Motorola Part Number	Operating Conditions			Significant Differences from Hardware Specification
	CPU Frequency (MHz)	V <sub>DD</sub>	T <sub>j</sub> (°C)	
XPC7455RX600NC	600	1.3 V ± 50 mV	0 to 105	Modified core and VCO frequency, and power consumption specifications
XPC7455RX733NC	733			
XPC7455RX800NC	800			
XPC7445RX600NC	600			
XPC7445RX733NC	733			
XPC7445RX800NC	800			

**Note:** The X prefix in a Motorola part number designates a “Pilot Production Prototype” as defined by Motorola SOP 3-13. These are from a limited production volume of prototypes manufactured, tested, and Q.A. inspected on a qualified technology to simulate normal production. These parts have only preliminary reliability and characterization data. Before pilot production prototypes may be shipped, written authorization from the customer must be on file in the applicable sales office acknowledging the qualification status and the fact that product changes may still occur while shipping pilot production prototypes.

## 1.1 Features

This section summarizes changes to the features of the MPC7455 described in the *MPC7455 RISC Microprocessor Hardware Specifications*.

- Power management
  - 1.3-V processor core

## 1.3 General Parameters

- Core power supply: 1.3 V  $\pm$  50 mV DC nominal

### 1.5.1 DC Electrical Characteristics

Table 4 provides the recommended operating conditions for the MPC7455 part numbers described herein.

**Table 4. Recommended Operating Conditions**

Characteristic	Symbol	Recommended Value	Unit
Core supply voltage	V <sub>DD</sub>	1.3 V $\pm$ 50 mV	V
PLL supply voltage	AV <sub>DD</sub>	1.3 V $\pm$ 50 mV	V

**Note:** These are the recommended and tested operating conditions. Proper device operation outside of these conditions is not guaranteed.

Table 7 provides the power consumption for the MPC7455 part numbers described herein.

**Table 7. Power Consumption for MPC7455**

	Processor (CPU) Frequency			Unit	Notes
	600 MHz	733 MHz	800 MHz		
<b>Full-Power Mode</b>					
Typical	8.4	10.3	11.2	W	1, 3
Maximum	11.9	14.5	15.9	W	1, 2
<b>Doze Mode</b>					
Typical	—	—	—	W	1, 2, 4
<b>Nap Mode</b>					
Typical	1.4	1.7	1.8	W	1, 2
<b>Sleep Mode</b>					
Typical	700	800	900	mW	1, 2
<b>Deep Sleep Mode (PLL Disabled)</b>					
Typical	470	490	500	mW	1, 3

**Notes:**

1. These values apply for all valid processor bus and L3 bus ratios. The values do not include I/O supply power ( $OV_{DD}$  and  $GV_{DD}$ ) or PLL supply power ( $AV_{DD}$ ).  $OV_{DD}$  and  $GV_{DD}$  power is system dependent, but is typically < 5% of  $V_{DD}$  power. Worst case power consumption for  $AV_{DD} < 3$  mW.
2. Maximum power is measured at nominal  $V_{DD}$  while running an entirely cache-resident, contrived sequence of instructions which keep the execution units, with or without Altivec, maximally busy.
3. Typical power is an average value measured at nominal  $V_{DD}$  in a system while running a typical code sequence.
4. Doze mode is not a user-definable state; it is an intermediate state between full-power and either nap or sleep mode. As a result, power consumption for this mode is not tested.

## General Parameters

Table 8 provides the clock AC timing specifications for the MPC7455 part numbers described herein.

**Table 8. Clock AC Timing Specifications**

At recommended operating conditions. See Table 4.

Characteristic	Symbol	Maximum Processor Core Frequency						Unit	Notes
		600 MHz		733 MHz		800 MHz			
		Min	Max	Min	Max	Min	Max		
Processor frequency	$f_{core}$	500	600	500	733	500	800	MHz	1
VCO frequency	$f_{VCO}$	1000	1200	1000	1466	1000	1600	MHz	1

**Notes:**

- Caution:** The SYSCLK frequency, PLL\_CFG[0:4] settings must be chosen such that the resulting SYSCLK (bus) frequency, CPU (core) frequency, and PLL (VCO) frequency do not exceed their respective maximum or minimum operating frequencies (see Table 4 in the *MPC7455 RISC Microprocessor Hardware Specifications*). Refer to the PLL\_CFG[0:4] signal description in Section 1.9.1, "PLL Configuration," for valid PLL\_CFG[0:4] settings.

Table 12 provides the L3 bus interface AC timing specifications for MSUG2 for the MPC7455 part numbers described herein.

**Table 12. L3 Bus Interface AC Timing Specifications for MSUG2**

At recommended operating conditions. See Table 4.

Parameter	Symbol	All Speed Grades				Unit	Notes
		L2CR[12] = 0 and L3CR[12] = 0 <sup>8</sup>		L2CR[12] = 1 and L3CR[12] = 1 <sup>8</sup>			
		Min	Max	Min	Max		
L3_CLK rise and fall time	$t_{L3CR}$ , $t_{L3CF}$	—	1.0	—	1.0	ns	1
Setup times: Data and parity	$t_{L3DVEH}$ , $t_{L3DVLE}$	-0.1	—	-0.1	—	ns	2, 3, 4
Input hold times: Data and parity	$t_{L3DXEH}$ , $t_{L3DXEL}$	$t_{L3\_ECHO\_CLK}/4$ + 0.6	—	$t_{L3\_ECHO\_CLK}/4$ + 0.6	—	ns	2, 4
Valid times: Data and parity	$t_{L3CHDV}$ , $t_{L3CLDV}$	—	$(-t_{L3\_CLK}/4)$ + 0.4	—	$(-t_{L3\_CLK}/4)$ + 0.8	ns	5, 6, 7
Valid times: All other outputs	$t_{L3CHOV}$	—	$t_{L3\_CLK}/4 + 1.0$	—	$t_{L3\_CLK}/4 + 1.2$	ns	5, 7
Output hold times: Data and parity	$t_{L3CHDX}$ , $t_{L3CLDX}$	$t_{L3\_CLK}/4 - 0.4$	—	$t_{L3\_CLK}/4 - 0.2$	—	ns	5, 6, 7
Output hold times: All other outputs	$t_{L3CHOX}$	$t_{L3\_CLK}/4 - 0.5$	—	$t_{L3\_CLK}/4 - 0.3$	—	ns	5, 7
L3_CLK to high impedance: Data and parity	$t_{L3CLDZ}$	—	$t_{L3\_CLK}/2$	—	$t_{L3\_CLK}/2$	ns	

**Table 12. L3 Bus Interface AC Timing Specifications for MSUG2 (continued)**

At recommended operating conditions. See Table 4.

Parameter	Symbol	All Speed Grades				Unit	Notes
		L2CR[12] = 0 and L3CR[12] = 0 <sup>8</sup>		L2CR[12] = 1 and L3CR[12] = 1 <sup>8</sup>			
		Min	Max	Min	Max		
L3_CLK to high impedance: All other outputs	t <sub>L3CHOZ</sub>	—	t <sub>L3_CLK</sub> /4 + 2.0	—	t <sub>L3_CLK</sub> /4 + 2.0	ns	

**Notes:**

1. Rise and fall times for the L3\_CLK output are measured from 20% to 80% of GV<sub>DD</sub>.
2. For DDR, all input specifications are measured from the midpoint of the signal in question to the midpoint voltage of the rising or falling edge of the input L3\_ECHO\_CLK<sub>n</sub> (see Figure 10 in the *MPC7455 RISC Microprocessor Hardware Specifications*). Input timings are measured at the pins.
3. For DDR, the input data will typically follow the edge of L3\_ECHO\_CLK<sub>n</sub> as shown in Figure 10 in the *MPC7455 RISC Microprocessor Hardware Specifications*. For consistency with other input setup time specifications, this will be treated as negative input setup time.
4. t<sub>L3\_ECHO\_CLK</sub>/4 is one-fourth the period of L3\_ECHO\_CLK<sub>n</sub>. This parameter indicates that the MPC7455 can latch an input signal that is valid for only a short time before and a short time after the midpoint between the rising and falling (or falling and rising) edges of L3\_ECHO\_CLK<sub>n</sub> at any frequency.
5. All output specifications are measured from the midpoint voltage of the rising (or for DDR write data, also the falling) edge of L3\_CLK to the midpoint of the signal in question. The output timings are measured at the pins. All output timings assume a purely resistive 50-Ω load (see Figure 8 in the *MPC7455 RISC Microprocessor Hardware Specifications*).
6. For DDR, the output data will typically lead the edge of L3\_CLK<sub>n</sub> as shown in Figure 10 in the *MPC7455 RISC Microprocessor Hardware Specifications*. For consistency with other output valid time specifications, this will be treated as negative output valid time.
7. t<sub>L3\_CLK</sub>/4 is one-fourth the period of L3\_CLK<sub>n</sub>. This parameter indicates that the specified output signal is actually launched by an internal clock delayed in phase by 90°. Therefore, there is a frequency component to the output valid and output hold times such that the specified output signal will be valid for approximately one L3\_CLK period starting three-fourths of a clock prior to the edge on which the SRAM will sample it and ending one-fourth of a clock period after the edge it will be sampled.
8. These configuration bits allow the AC timing of the L3 interface to be altered via software. They must be both set or both cleared; other configurations will increase t<sub>L3CSKW1</sub>, which may cause unreliable L3 operation.

## General Parameters

Table 13 provides the L3 bus AC timing specifications for PB2 and Late Write SRAMs for the MPC7455 part numbers described herein.

**Table 13. L3 Bus Interface AC Timing Specifications for PB2 and Late Write SRAMs**

At recommended operating conditions. See Table 4.

Parameter	Symbol	All Speed Grades				Unit	Notes
		L2CR[12]=0 and L3CR[12]=0 <sup>6</sup>		L2CR[12]=1 and L3CR[12]=1 <sup>6</sup>			
		Min	Max	Min	Max		
L3_CLK rise and fall time	$t_{L3CR}$ , $t_{L3CF}$	—	1.0	—	1.0	ns	1, 5
Setup times: Data and parity	$t_{L3DVEH}$	1.5	—	1.5	—	ns	2, 5
Input hold times: Data and parity	$t_{L3DXEH}$	—	0.5	—	0.5	ns	2, 5
Valid times: Data and parity	$t_{L3CHDV}$	—	$t_{L3\_CLK}/4 + 1.0$	—	$t_{L3\_CLK}/4 + 1.2$	ns	3, 4, 5
Valid times: All other outputs	$t_{L3CHOV}$	—	$t_{L3\_CLK}/4 + 1.0$	—	$t_{L3\_CLK}/4 + 1.2$	ns	4
Output hold times: Data and parity	$t_{L3CHDX}$	$t_{L3\_CLK}/4 - 0.4$	—	$t_{L3\_CLK}/4 - 0.2$	—	ns	3, 4, 5
Output hold times: All other outputs	$t_{L3CHOX}$	$t_{L3\_CLK}/4 - 0.4$	—	$t_{L3\_CLK}/4 - 0.2$	—	ns	4, 5
L3_CLK to high impedance: Data and parity	$t_{L3CHDZ}$	—	2.0	—	2.0	ns	5
L3_CLK to high impedance: All other outputs	$t_{L3CHOZ}$	—	2.0	—	2.0	ns	5

**Notes:**

1. Rise and fall times for the L3\_CLK output are measured from 20% to 80% of  $GV_{DD}$ .
2. All input specifications are measured from the midpoint of the signal in question to the midpoint voltage of the rising edge of the input L3\_ECHO\_CLK<sub>n</sub> (see Figure 10 in the *MPC7455 RISC Microprocessor Hardware Specifications*). Input timings are measured at the pins.
3. All output specifications are measured from the midpoint voltage of the rising edge of L3\_CLK<sub>n</sub> to the midpoint of the signal in question. The output timings are measured at the pins. All output timings assume a purely resistive 50-Ω load (see Figure 10 in the *MPC7455 RISC Microprocessor Hardware Specifications*).
4.  $t_{L3\_CLK}/4$  is one-fourth the period of L3\_CLK<sub>n</sub>. This parameter indicates that the specified output signal is actually launched by an internal clock delayed in phase by 90°. Therefore, there is a frequency component to the output valid and output hold times such that the specified output signal will be valid for approximately one L3\_CLK period starting three-fourths of a clock prior to the edge on which the SRAM will sample it and ending one-fourth of a clock period after the edge it will be sampled.
5. Timing behavior and characterization are currently being evaluated.
6. These configuration bits allow the AC timing of the L3 interface to be altered via software. They must be both set or both cleared; other configurations will increase  $t_{L3CSKW1}$  and  $t_{L3CSKW2}$ , which may cause unreliable L3 operation.

### 1.9.1 PLL Configuration

The MPC7455 PLL is configured by the PLL\_CFG[0:4] signals; note that PLL\_CFG[4] was formerly called PLL\_EXT in earlier documentation. For a given SYSCLK (bus) frequency, the PLL configuration signals set the internal CPU and VCO frequency of operation. PLL\_CFG[4] will normally be pulled low but can be asserted for extended modes of operation. The PLL configuration for the MPC7455 is shown in Table 17 for a set of example frequencies. In this example, shaded cells represent settings that, for a given SYSCLK frequency, result in core and/or VCO frequencies that do not comply with the 1-GHz column in Table 8. Note that the settings for Rev. C devices are different than those for subsequent devices.

**Table 17. MPC7455 Microprocessor PLL Configuration Example for 800-MHz Parts**

PLL_CFG [0:4]	Example Bus-to-Core Frequency in MHz (VCO Frequency in MHz)								
	Bus-to-Core Multiplier	Core-to-VCO Multiplier	Bus 33.3 MHz	Bus 50 MHz	Bus 66.6 MHz	Bus 75 MHz	Bus 83 MHz	Bus 100 MHz	Bus 133 MHz
00000	0.5x	2x							
01000	2x	2x							
01100	2.5x	2x							
10000	3x	2x							
11100	3.5x	2x							
10100	4x	2x							533 (1066)
01110	4.5x	2x							600 (1200)
10110	5x	2x						500 (1000)	667 (1333)
10010	5.5x	2x						550 (1100)	733 (1466)
11010	6x	2x						600 (1200)	800 (1600)
01010	6.5x	2x					540 (1080)	650 (1300)	
00100	7x	2x				525 (1050)	580 (1160)	700 (1400)	
00010	7.5x	2x			500 (1000)	563 (1125)	623 (1245)	750 (1500)	
11000	8x	2x			533 (1066)	600 (1200)	664 (1328)	800 (1600)	
01111	9x	2x			600 (1200)	675 (1350)	747 (1494)		

Table 17. MPC7455 Microprocessor PLL Configuration Example for 800-MHz Parts (continued)

PLL_CFG [0:4]	Example Bus-to-Core Frequency in MHz (VCO Frequency in MHz)								
	Bus-to-Core Multiplier	Core-to-VCO Multiplier	Bus 33.3 MHz	Bus 50 MHz	Bus 66.6 MHz	Bus 75 MHz	Bus 83 MHz	Bus 100 MHz	Bus 133 MHz
10101	10x	2x		500 (1000)	667 (1333)	750 (1500)			
10011	11x	2x		550 (1100)	733 (1466)				
10111	12x	2x		600 (1200)	800 (1600)				
01011	13x	2x		650 (1300)					
11001	14x	2x		700 (1400)					
00011	15x	2x	500 (1000)	750 (1500)					
11011	16x	2x	533 (1066)	800 (1600)					
00110	PLL off/bypass		PLL off, SYSCLK clocks core circuitry directly						
11110	PLL off		PLL off, no core clocking occurs						



## 1.11 Ordering Information

### 1.11.1 Part Numbers Addressed by this Specification

Table 21 provides the ordering information for the MPC7455 parts described in this document.

Table 21. Part Marking Nomenclature


XPC	74x5	RX	nnn	x	x
Product Code	Part Identifier	Package	Processor Frequency <sup>1</sup>	Application Modifier	Revision Level
XPC <sup>2</sup>	7455 7445	RX = CBGA	600 733 800	N: 1.3 V ± 50 mV 0 to 105°C	C: 2.1; PVR = 8001 0201

**Notes:**

- <sup>1</sup> Processor core frequencies supported by parts addressed by this specification only. Parts addressed by other specifications may support other maximum core frequencies.
- <sup>2</sup> The X prefix in a Motorola part number designates a “Pilot Production Prototype” as defined by Motorola SOP 3-13. These are from a limited production volume of prototypes manufactured, tested, and Q.A. inspected on a qualified technology to simulate normal production. These parts have only preliminary reliability and characterization data. Before pilot production prototypes may be shipped, written authorization from the customer must be on file in the applicable sales office acknowledging the qualification status and the fact that product changes may still occur while shipping pilot production prototypes.

### 1.11.3 Part Marking

Parts are marked as the example shown in Figure 29.

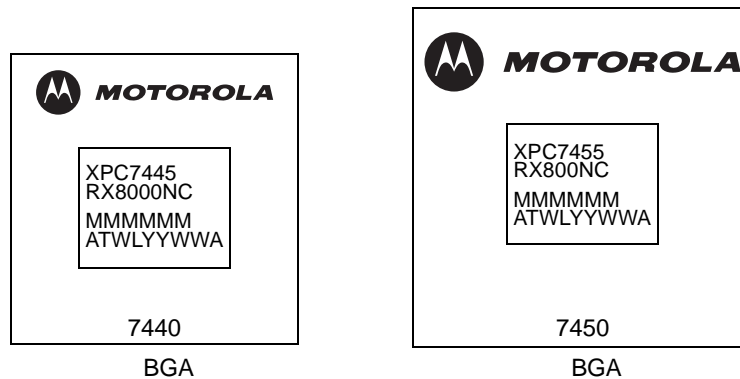

**Notes:**

- MMMMMM is the 6-digit mask number.
- ATWLYYWWA is the traceability code.
- CCCCC is the country of assembly. This space is left blank if parts are assembled in the United States.

Figure 29. Motorola Part Marking for BGA Devices

## Document Revision History

Table B provides a revision history for this part number specification.

**Table B. Document Revision History**

Rev. No.	Substantive Change(s)
0	Initial release.
0.1	Updated wording in Table A, 'Significant Differences from Hardware Specification,' column.
	Corrected part number in heading of Table 7 (changed from MPC7450 to MPC7455).
	Added Document Revision History section and Table B.
1	Updated Table 7, note 1.
	Added Tables 2, 12, 13, and 17.
1.1	Table 9: corrected typo in units for Sleep Mode power, changed "W" to "mW".
	Table 17: corrected PLL_CFG values; previous revisions of this specification had swapped PLL_CFG[0] with PLL_CFG[4].

THIS PAGE INTENTIONALLY LEFT BLANK

# Freescale Semiconductor, Inc.

## HOW TO REACH US:

### USA/EUROPE/LOCATIONS NOT LISTED:

Motorola Literature Distribution  
P.O. Box 5405, Denver, Colorado 80217  
1-480-768-2130  
(800) 521-6274

### JAPAN:

Motorola Japan Ltd.  
SPS, Technical Information Center  
3-20-1, Minami-Azabu Minato-ku  
Tokyo 106-8573 Japan  
81-3-3440-3569

### ASIA/PACIFIC:

Motorola Semiconductors H.K. Ltd.  
Silicon Harbour Centre, 2 Dai King Street  
Tai Po Industrial Estate, Tai Po, N.T., Hong Kong  
852-26668334

### TECHNICAL INFORMATION CENTER:

(800) 521-6274

### HOME PAGE:

[www.motorola.com/semiconductors](http://www.motorola.com/semiconductors)

Information in this document is provided solely to enable system and software implementers to use Motorola products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Motorola reserves the right to make changes without further notice to any products herein.

Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.



Motorola and the Stylized M Logo are registered in the U.S. Patent and Trademark Office. digital dna is a trademark of Motorola, Inc. The described product is a PowerPC microprocessor. The PowerPC name is a trademark of IBM Corp. and used under license. All other product or service names are the property of their respective owners. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

© Motorola, Inc. 2004

MPC7455RXNXPNS

**For More Information On This Product,  
Go to: [www.freescale.com](http://www.freescale.com)**

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

[www.AllDataSheet.com](http://www.AllDataSheet.com)

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

[www.AllDataSheet.com](http://www.AllDataSheet.com)