

18FF- 3Z- C5

RELAY SOCKET




CHARACTERISTICS

Ambient temperature :	-40 °C to 70°C
Rated voltage:	250VAC
Rated current :	7A (per pole)
Dielectric strength min. :	2000VAC (between input & output)
Retainer type :	18FF-H4 (Plastic retainer) 18FF-H5 (Steel retainer) available
Marker type:	18FF-M1
Module type :	HFAA to HFHU available
Terminal torque :	0.6Nm
Wire strip length :	7mm
Max. wire range :	1x4 / 2x2.5mm ²
Applicable relay type:	HF18FF (3 poles)


DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit: mm

Outline Dimensions

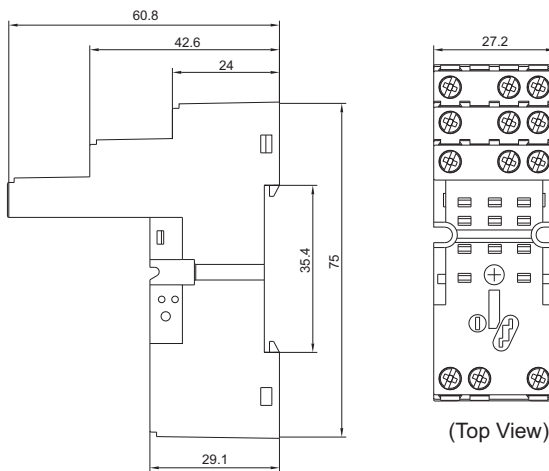

Wiring Diagram

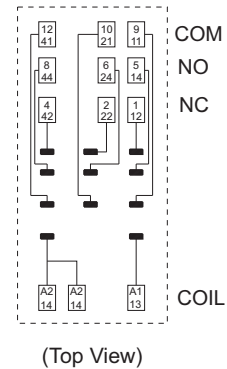



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED



2009 Rev. 1.10

Retainer Dimensions



18FF-H4 (Plastic retainer)



18FF-H5 (Steel retainer)



Marker Dimensions (18FF-M1)



Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.