

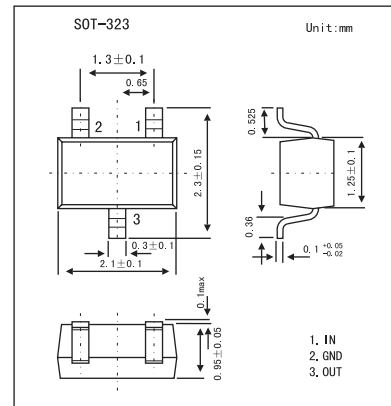
## Schottky barrier (double) diodes

1PS70SB40;1PS70SB44

1PS70SB45;1PS70SB46

## ■ Features

- Low forward voltage
- Guard ring protected
- Very small plastic SMD package
- Low diode capacitance

■ Absolute Maximum Ratings  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Conditions	Min	Max	Unit
Continuous reverse voltage	$V_R$			40	V
Continuous forward current	$I_F$			120	mA
Repetitive peak forward current	$I_{FRM}$	$t_p \leq 1\text{s}, \delta \leq 0.5$		120	mA
Non-repetitive peak forward current	$I_{FSM}$	$t_p < 10\text{ ms}$		200	mA
Storage temperature	$T_{stg}$		-65	+150	$^\circ\text{C}$
Junction temperature	$T_j$			125	$^\circ\text{C}$
Operating ambient temperature	$T_{amb}$		-65	+125	$^\circ\text{C}$

■ Electrical Characteristics  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Conditions	Max	Unit
Continuous forward voltage	$V_F$	$I_F = 1\text{ mA}$	380	mV
		$I_F = 10\text{ mA}$	500	mV
		$I_F = 40\text{ mA}$	1	V
Continuous reverse current	$I_R$	$V_R = 30\text{ V}, \text{ Note 1}$	1	$\mu\text{ A}$
		$V_R = 40\text{ V}, \text{ Note 1}$	10	
Charge carrier life time	$\tau$	$I_F = 5\text{ mA}, \text{ Krakauer method}$	100	ps
Diode capacitance	$C_d$	$V_R = 0\text{ V}, f = 1\text{ MHz}$	5	pF

Note

1. Pulse test:  $t_p < 300\ \mu\text{s}; \delta \leq 0.02$ .

## ■ Marking

Type	1PS70SB40	1PS70SB44	1PS70SB45	1PS70SB46
Marking	6*3	6*4	6*5	6*6