


Strip Block for Snap-in Mounting with 4 IEC Appliance Outlets F and space for extra component



Snap-In Version



### Description

- Panel Mount:  
Snap-in version from front side
- 3 Functions:  
Module of 4 outlets, with additional carrier frame for accessory modules, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

### Approvals

- CSA License Number: 56242

### Characteristics

- Insulation cover on the rear-side
- Qualified for use in equipment according IEC/EN 60950

### Other versions on request

- For protection class II

### References

[General Product Information](#)

### Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


### Technical Data

Ratings IEC	10A / 250VAC; 50Hz	Appliance Outlet	F acc. to IEC/EN 60320-2-2,
Ratings UL/CSA	15A / 250VAC; 60Hz		UL 498 CSA C22.2 no. 42 (for cold
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)		conditions) pin-temperature 70 °C, 10A,
Allowable Operation Temp.	-25 °C to 70 °C		Protection Class 1
Degree of Protection	from front side IP 30 acc. to IEC 60529		
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140		
Terminal	Solder terminals or quick connect terminals		
Panel Thickness s	Snap-in 1/ 1.2/ 1.5/ 2/ 2.5/ 3 mm tolerance +0.0/-0.1		
Material: Housing	Thermoplastic, black, UL 94V-0		

**Dimensions**

Cut-out for 2 mm

Snap-in Inlet

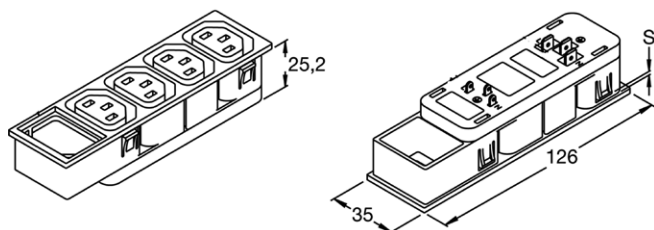

Panel cut-out  
122.1 x 32.5 mm  
Max. corner radius 1 mm

**Variants**
[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Panel Thickness s [mm]	Terminal	Length [mm]	Order Number
1	Quick connect terminals 6.3 x 0.8 mm	126	4754.3200
1.2	Quick connect terminals 6.3 x 0.8 mm	126	4754.8200
1.5	Quick connect terminals 6.3 x 0.8 mm	126	4754.4200
2	Quick connect terminals 6.3 x 0.8 mm	126	4754.5200
2.5	Quick connect terminals 6.3 x 0.8 mm	126	4754.6200
3	Quick connect terminals 6.3 x 0.8 mm	126	4754.7200
1	Solder terminals 4 x 0.8 mm	126	4754.3400
1.2	Solder terminals 4 x 0.8 mm	126	4754.8400
1.5	Solder terminals 4 x 0.8 mm	126	4754.4400
2	Solder terminals 4 x 0.8 mm	126	4754.5400
2.5	Solder terminals 4 x 0.8 mm	126	4754.6400
3	Solder terminals 4 x 0.8 mm	126	4754.7400
1	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.3000
1.2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.8000
1.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.4000
2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.5000
2.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.6000
3	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.7000

Please note, all quadblocs are available in protection-class II upon request.

Cord retaining clamp see accessories

**Packaging unit** 40 Pcs

Accessories

Description



[Cord retaining kits](#)  
Cord retaining strain relief

Flat head, Z	0888.0021
Flat head, E	4700.0005
Flat head, G	4700.0007
Flat head, H	4700.0008

Mating Inlets/Plugs

Category / Description

[Interconnection Cord Overview complete](#)



Interconnection Cord with IEC Plug E, Angled	0607
Interconnection Cord with IEC Plug E, Angled	0608
Interconnection Cord with IEC Plug E, Straight	0609
Interconnection Cord with IEC Plug G, Angled	607B
Interconnection Cord with IEC Plug G, Angled	608B

[Interconnection Cord further types to 4754](#)

...

[Plug Overview complete](#)



IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm	4732
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4733
IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm	4735
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4736
IEC Plug E, Cord Connector (Rewireable), Straight	9009

[Plug further types to 4754](#)

...