


# BT151-600

## ◆ Features

- With TO-220 package
- 1cathode 2 anode 3 gate
- For use in applications requiring high bidirectional blocking voltage capability and high thermal cycling performance. Typical applications include motor control, industrial and domestic lighting, heating and static switching.

## ◆ QUICK REFERENCE DATA

| SYMBOL       | PARAMETER                            | MIN     | UNIT |        |
|--------------|--------------------------------------|---------|------|--------|
| $V_{DRM}$    | Repetitive peak off-state voltage    | 600     | V    |        |
| $V_{RRM}$    | Repetitive peak reverse voltage      | 600     | V    |        |
| $I_{T(AV)}$  | Average on-state current             | 7.5     | A    |        |
| $I_{T(RMS)}$ | RMS on-state current                 | 12      | A    |        |
| $I_{TSM}$    | Non-repetitive peak on-state current | 100     | A    |        |
| $P_{GM}$     | Peak gate power                      | 5       | W    |        |
| $P_{G(AV)}$  | Average gate power                   | 0.5     | W    |        |
| $T_{stg}$    | Storage temperature                  | -45~150 | °C   |        |
| $T_j$        | Operating junction temperature       | 110     | °C   | TO-220 |

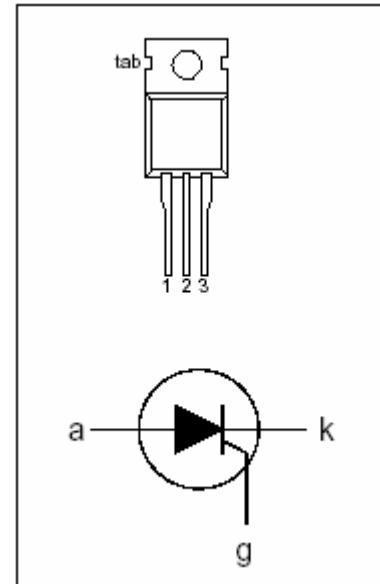

## ◆ LIMITING VALUES

Limiting values in accordance with the absolute maximum system(IEC 134)

| SYMBOL    | PARAMETER                         | CONDITIONS           | MIN | MAX  | UNIT |
|-----------|-----------------------------------|----------------------|-----|------|------|
| $V_{DRM}$ | Repetitive peak off-state voltage |                      | 600 |      | V    |
| $V_{RRM}$ | Repetitive peak reverse voltage   |                      | 600 |      | V    |
| $I_{GT}$  | Gate trigger current              | $V_D=12V; I_T=0.1A$  |     | 15   | mA   |
| $V_T$     | On-state voltage                  | $I_T=23A$            |     | 1.75 | V    |
| $V_{GT}$  | Gate trigger voltage              | $V_D=12V ; I_T=0.1A$ |     | 1.5  | V    |