

isc Silicon NPN Power Transistor


BU932P

DESCRIPTION

- High Voltage
- DARLINGTON


APPLICATIONS

- High ruggedness electronic ignitions.
- High voltage ignition coil driver

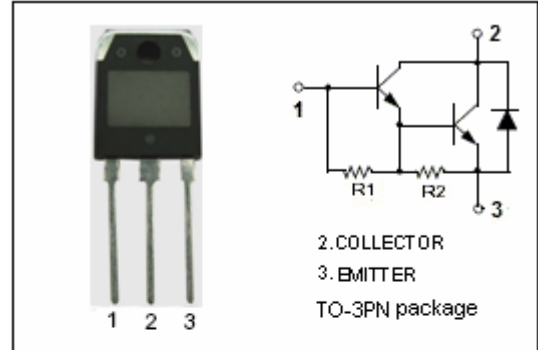

ABSOLUTE MAXIMUM RATINGS (T<sub>a</sub>=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V <sub>CBO</sub>	Collector-Base Voltage	500	V
V <sub>CEO</sub>	Collector-Emitter Voltage	450	V
V <sub>EBO</sub>	Emitter-Base Voltage	5	V
I <sub>C</sub>	Collector Current	15	A
I <sub>CM</sub>	Collector Current-peak	30	A
I <sub>B</sub>	Base Current	1	A
I <sub>BM</sub>	Base Current-peak	5	A
P <sub>C</sub>	Collector Power Dissipation @T <sub>C</sub> =25°C	105	W
T <sub>j</sub>	Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature Range	-40~150	°C

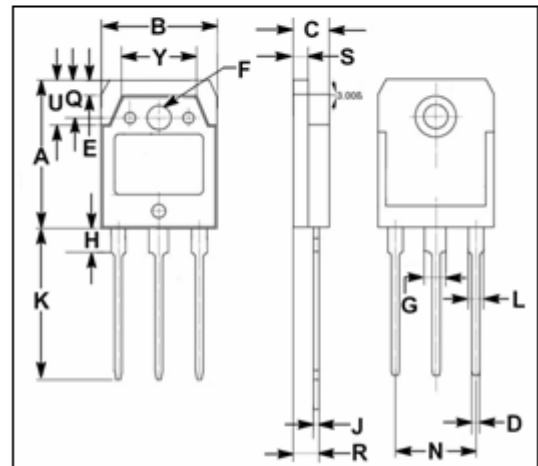

DIM	mm	
	MIN	MAX
A	19.90	20.10
B	15.50	15.70
C	4.70	4.90
D	0.90	1.10
E	1.90	2.10
F	3.40	3.60
G	2.90	3.10
H	3.20	3.40
J	0.595	0.605
K	20.50	20.70
L	1.90	2.10
N	10.89	10.91
Q	4.90	5.10
R	3.35	3.45
S	1.995	2.005
U	5.90	6.10
Y	9.90	10.10

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R <sub>th j-c</sub>	Thermal Resistance, Junction to Case	2.08	°C/W

**isc Silicon NPN Power Transistor****BU932P****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C= 0.1\text{A}; I_B= 0$	450			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C= 8\text{A}; I_B= 150\text{mA}$			1.8	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C= 8\text{A}; I_B= 150\text{mA}$			2.2	V
$I_{CES}$	Collector Cutoff Current	$V_{CE}= 500\text{V}; V_{BE}= 0$ $V_{CE}= 500\text{V}; V_{BE}= 0; T_j= 125^{\circ}\text{C}$			1.0 5.0	mA
$I_{CEO}$	Collector Cutoff Current	$V_{CE}= 450\text{V}; I_B= 0$			1.0	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}= 5\text{V}; I_C= 0$			50	mA
$h_{FE}$	DC Current Gain	$I_C= 5\text{A}; V_{CE}= 10\text{V}$	300			
$V_{ECF}$	C-E Diode Forward Voltage	$I_F= 10\text{A}$			2.8	V