

**FEMALE HEADERS**

**FEMALE HEADER SIDE ENTRY - 4.2mm PROFILE**

- Industry compatible
- Competitively priced
- Dual Row
- No. of contacts 02-80
- Gold plated contacts
- 2.00mm pitch




SECTION 8

**SPECIFICATION**


**Material & Finish**

<b>Contact Material:</b>	Phosphor Bronze	<b>Dielectric Withstanding Voltage:</b>	500V AC for One Minute
<b>Insulator Material:</b>	PBT & Glass-Fibre Reinforced UL-94V-0	<b>Operating Temperature:</b>	-40°C to + 105°C
<b>Current Rating:</b>	1 A DC		
<b>Contact Resistance:</b>	30M Ω Max		
<b>Insulator Resistance:</b>	3000M Ω Min		

**OUTLINE DRAWING**

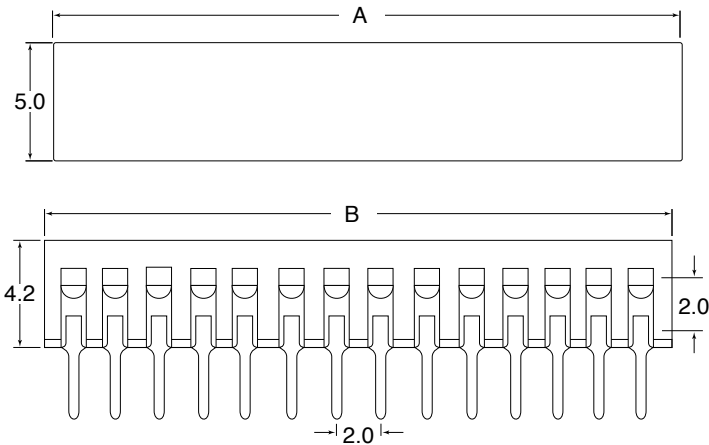

A = 2.00mm x N° of Contacts  
 B = (2.00mm x N° of Contacts)-1



**ORDERING INFORMATION**

<b>DBC</b>	<b>IDC</b>	<b>B14</b>	<b>D</b>	<b>04</b>	<b>B</b>	<b>G</b>	<b>1</b>
Dubilier Connectors	IDC Connector	Series	N° of Rows D = Dual Row	N° of Contacts/per row 02=2way Thru to 40=40way	Contact Material B=Bronze	Contact Plating G= Gold Flash	Colour 1=Black